

SK6648 1.5MHz, 1.2A Synchronous Step-Down Converter

GENERAL DESCRIPTION

The SK6648 are 1.5MHz constant frequency, current mode step-down converters. The devices integrate a main switch and a synchronous rectifier for high efficiency without an external Schottky diode. It is ideal for powering portable equipment that runs from a single cell Lithium-Ion (Li+) battery. The output voltage can be regulated as low as 0.6V. The SK6648 can also run at 100% duty cycle for low dropout operation, extending battery life in portable system. The devices offer two operation modes, PWM control and PFM Mode switching control, which allows a high efficiency over the wider range of the load.

APPLICATIONS

- Cellular and Smart Phones
- Wireless and DSL Modems
- Digital Still and Video Cameras

FEATURES

- High Efficiency: Up to 96%(@3.3V)
- 1.5MHz Constant Frequency Operation
- 1.2A Output Current
- No Schottky Diode Required
- 2.5V to 6.0V Input Voltage Range
- Output Voltage as Low as 0.6V
- 100% Duty Cycle in Dropout
- Low Quiescent Current: 40 μ A
- Slope Compensated Current Mode Control for Excellent Line and Load Transient Response
- Soft Start time for 1ms
- Short Circuit Protection with Frequency reduction mode
- Thermal Fault Protection
- Inrush Current Limit and Soft Start
- Input over voltage protection (OVP)
- <1 μ A Shutdown Current
- Available SOT23-5 and DFN2x2-6L Packages

TYPICAL APPLICATION


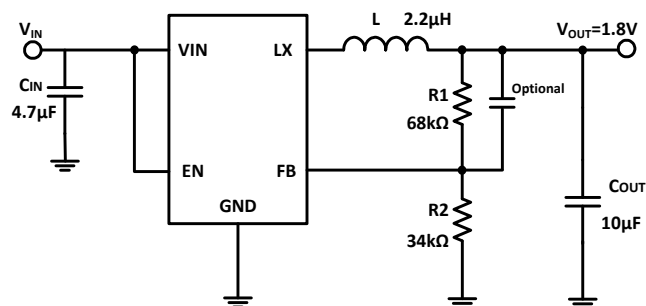


Figure 1. Basic Application Circuits

Efficiency


$V_{OUT}=1.8V$, $L=2.2\mu H$

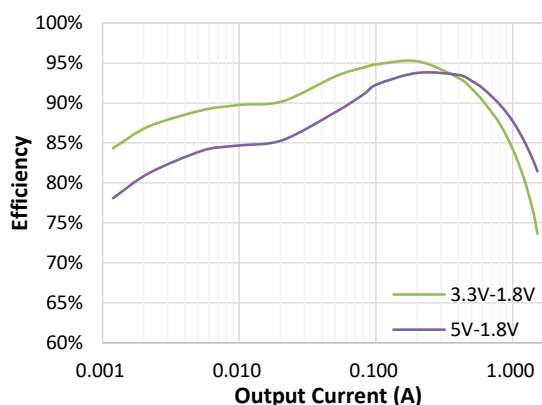


ABSOLUTE MAXIMUM RATINGS (Note 1)

Parameter	Value	Unit
Input Supply Voltages	-0.3~6.5	V
LX Voltages	-0.3~6.5	V
EN, FB Voltage	-0.3~6.5	V
Storage Temperature Range	-65~150	°C
Junction Temperature <small>(Note 2)</small>	-40~160	°C
Power Dissipation	600	mW
Lead Temperature Soldering, 10Sec	260	°C

PIN CONFIGURATION

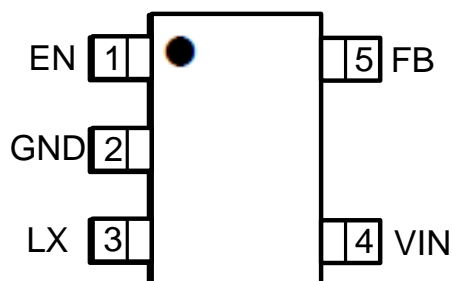

SOT23-5
Mark: T25AXXX
XXX: Inside Code

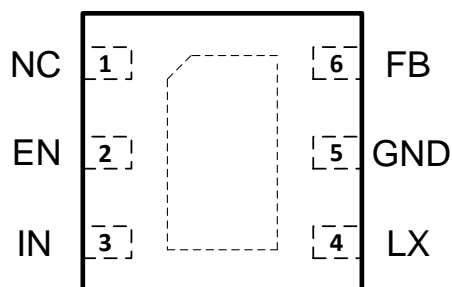

DFN2x2-6L
Mark: T28AXXX
XXX: Inside Code

Part Number	Package	Mark	Quantity/ Reel
SK6648	SOT23-5	T25AXXX	3000
SK6648D	DFN2x2-6L	T28AXXX	3000

SK6648 devices are Pb-free and RoHS compliant.

PIN FUNCTIONS

Pin		Name	Function
SOT23-5	DFN2x2-6L		
1	2	EN	Chip Enable Pin. Drive EN above 1.5V to turn on the part. Drive EN below 0.4V to turn it off. Do not leave EN floating.
2	5	GND	Ground Pin.
3	4	LX	Power Switch Output. It is the switch node connection to Inductor.
4	3	VIN	Power Supply Input. Must be closely decoupled to GND with a 4.7 μ F or greater ceramic capacitor.
5	6	FB	Output Voltage Feedback Pin.
-	1	NC	No Connection

ESD RATING

Items	Description	Value	Unit
V_{ESD_HBM}	Human Body Model for all pins	± 2000	V
V_{ESD_CDM}	Charger Device Model for all pins	± 1000	V

JEDEC specification JS-001

RECOMMENDED OPERATING CONDITIONS

Items	Description	Min	Max	Unit
Voltage Range	VIN	2.5	6	V
T_J	Operating Junction Temperature Range	-40	125	$^{\circ}$ C

THERMAL RESISTANCE (Note 3)

Items	Description	Package	Value	Unit
θ_{JA}	Junction-to-ambient thermal resistance	SOT23-5	220	$^{\circ}$ C/W
		DFN2x2-6L	152	
θ_{JC}	Junction-to-case thermal resistance	SOT23-5	62	$^{\circ}$ C/W
		DFN2x2-6L	25	

ELECTRICAL CHARACTERISTICS

($V_{IN}=V_{EN}=5V$, $V_{OUT}=1.8V$, $T_A = 25^{\circ}C$, unless otherwise noted.)

Parameter	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range		2.5		6.0	V
OVP Threshold			6.2	6.5	V
UVLO Threshold			2.3		V
Quiescent Current	$V_{EN}=2.0V$, $I_{OUT}=0A$, $V_{FB}=V_{REF} * 105\%$		40	65	μA
Shutdown Current	$V_{EN}=0V$		0.1	10	μA
Regulated Feedback Voltage	$T_A = 25^{\circ}C$	0.588	0.600	0.612	V
Reference Voltage Line Regulation	$V_{IN} = 2.5V$ to $6.0V$		0.04	0.40	%/V
Output Voltage Line Regulation	$V_{IN} = 2.5V$ to $6.0V$		0.04	0.4	%
Output Voltage Load Regulation			0.5		%
Oscillation Frequency	$V_{OUT}=100\%$		1.5		MHz
Oscillation Frequency	$V_{OUT}=0V$		300		kHz
Soft-start time			0.5		ms
On Resistance of PMOS	$I_{LX}=100mA$		0.25	0.30	Ω
On Resistance of NMOS	$I_{LX}=-100mA$		0.10	0.15	Ω
Peak Current Limit	$V_{IN}=5V$, $V_{OUT}=1.2V$, $L=4.7\mu H/2A$	1.5		2.4	A
EN Input High Level Voltage		1.5			V
EN Input Low Level Voltage				0.4	V
EN Leakage Current			± 0.01	± 1.0	μA
LX Leakage Current	$V_{EN}=0V$, $V_{IN}=V_{LX}=5V$		± 0.01	± 1.0	μA
Thermal Shutdown Threshold (Note 4)			150		$^{\circ}C$
Thermal Shutdown Hysteresis (Note 4)			25		$^{\circ}C$

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: T_J is calculated from the ambient temperature T_A and power dissipation P_D according to the following formula: $T_J = T_A + (P_D) \times \theta_{JA}$.

Note 3: Measured on JESD51-7, 4-layer PCB.

Note 4: Guaranteed by design.

FUNCTION DESCRIPTION

The SK6648 are high performance 1.2A 1.5MHz monolithic step-down converters. The SK6648 require only three external power components (C_{in} , C_{out} and L). The adjustable version can be programmed with external feedback to any voltage, ranging from 0.6V to the input voltage.

At dropout, the converter duty cycle increases to 100% and the output voltage tracks the input voltage minus the $R_{ds(on)}$ drop of the high-side MOSFET.

The internal error amplifier and compensation provides excellent transient response, load, and line regulation. Soft start function prevents input inrush current and output overshoot during start up.

FUNCTIONAL BLOCK DIAGRAM


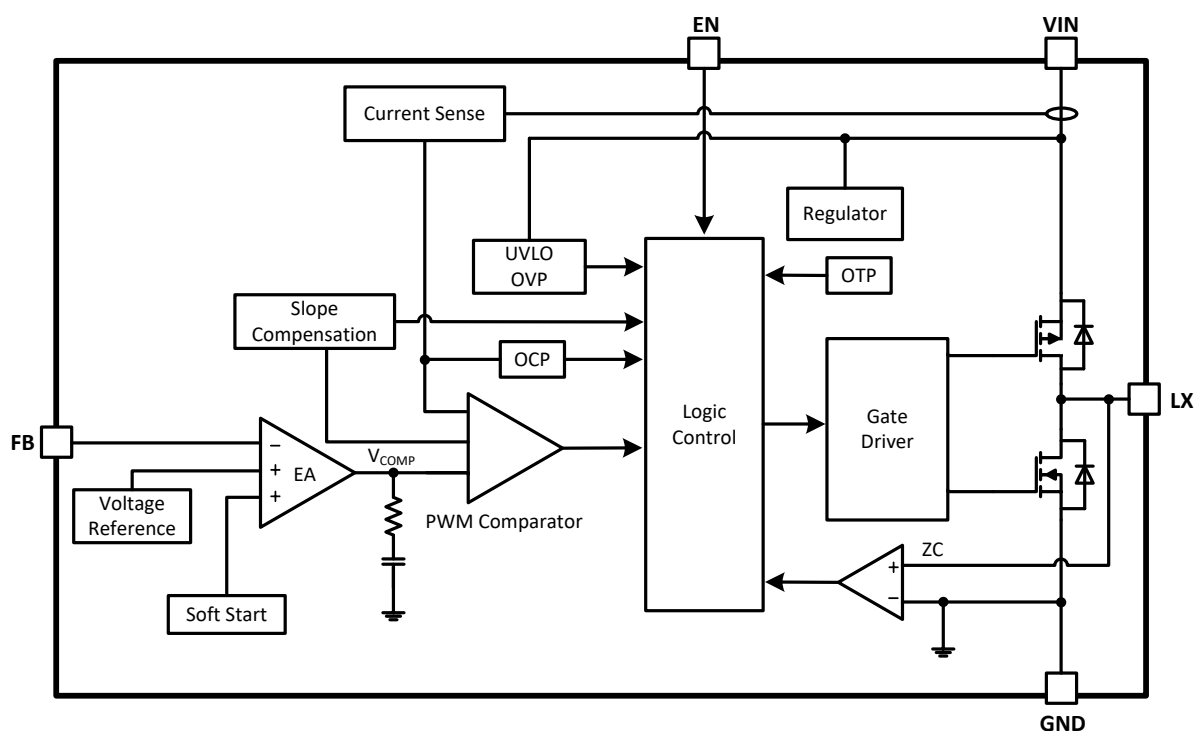


Figure 2. SK6648 Block Diagram


TYPICAL PERFORMANCE CHARACTERISTICS

Test condition: $V_{IN}=5V$, $V_{OUT}=1.8V$, $L=2.2\mu H$, $T_A=+25^\circ C$, unless other noted.


Efficiency at $V_{IN}=5V$

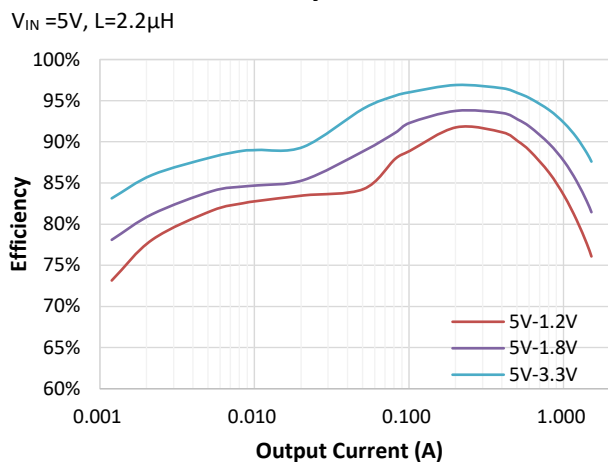


Efficiency at $V_{IN}=3.3V$

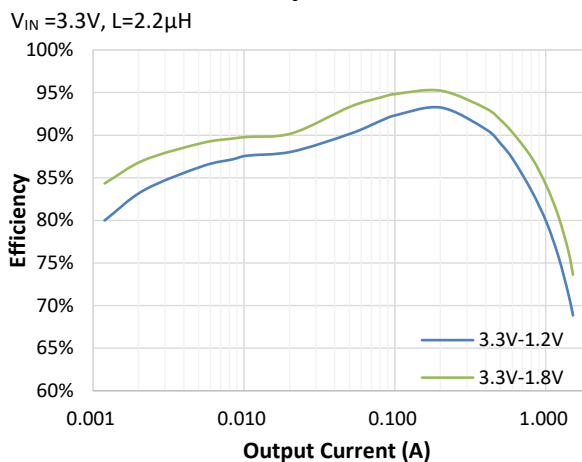


Load Regulation

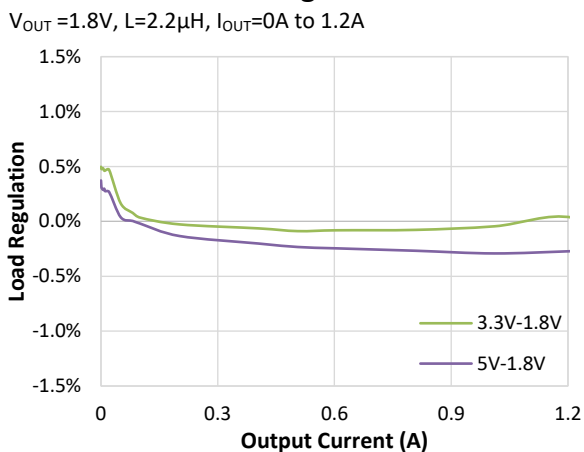


Line Regulation

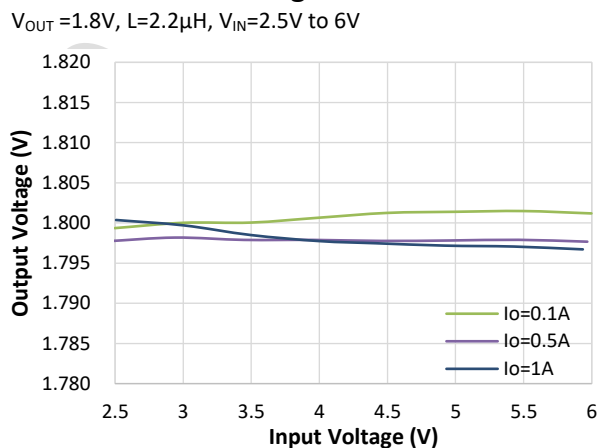

Steady State Operation

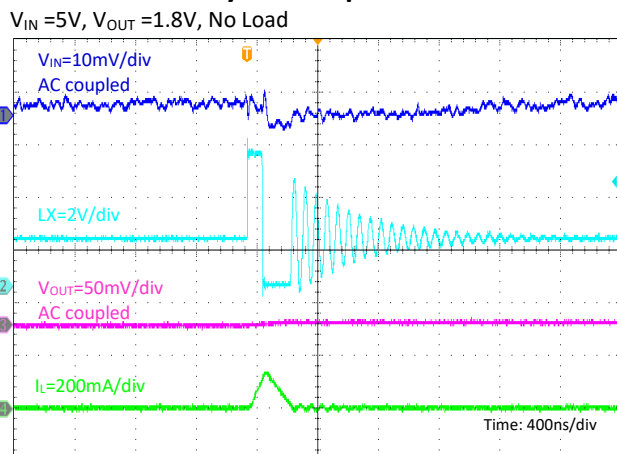


Steady State Operation

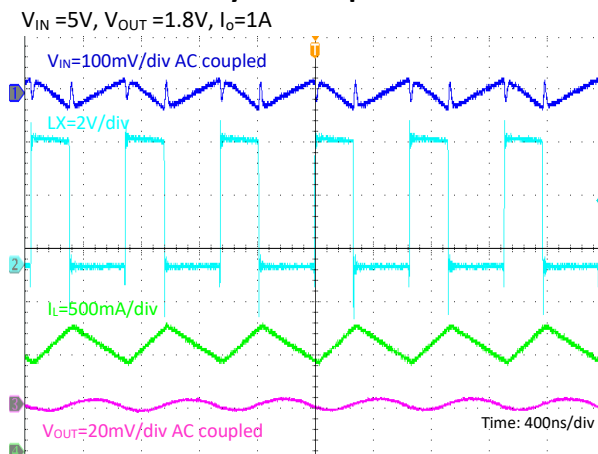

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


Load Transient

$V_{IN} = 5V$, $V_{OUT} = 1.8V$, $I_o = 0A$ to $1A$

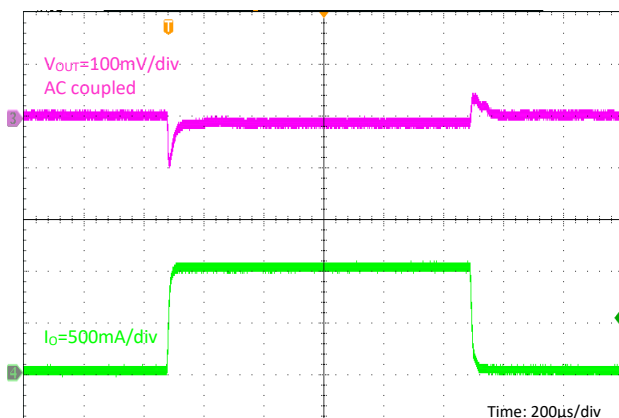


Load Transient

$V_{IN} = 5V$, $V_{OUT} = 1.8V$, $I_o = 0.1A$ to $0.9A$

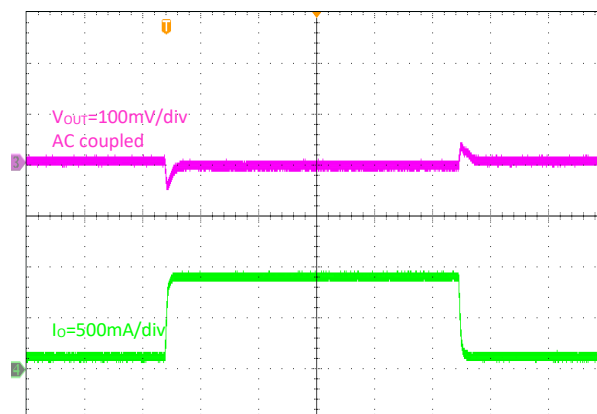


Load Transient

$V_{IN} = 5V$, $V_{OUT} = 1.8V$, $I_o = 0A$ to $0.5A$

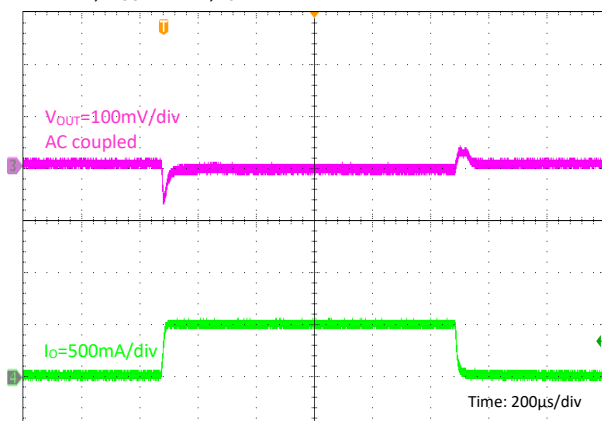


Load Transient

$V_{IN} = 5V$, $V_{OUT} = 1.8V$, $I_o = 0.5A$ to $1A$

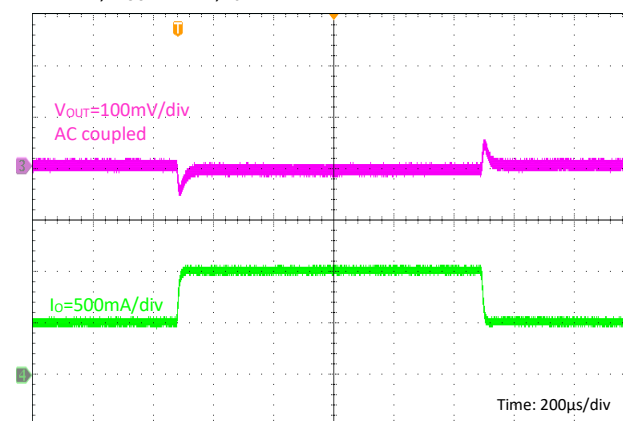


EN Enable Power On

$V_{EN} = 3.6V$, $V_{OUT} = 1.8V$, No Load

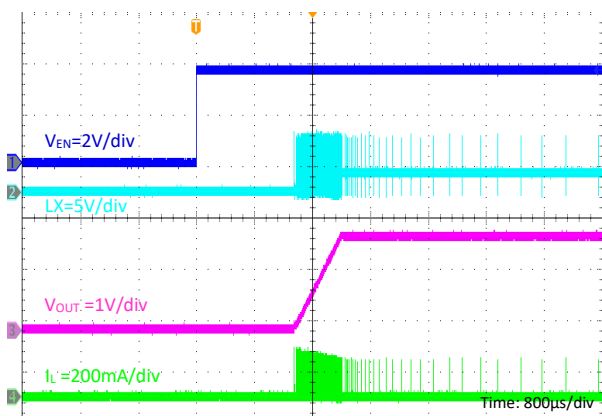

EN Enable Power On


$V_{EN} = 3.6V$, $V_{OUT} = 1.8V$, No Load

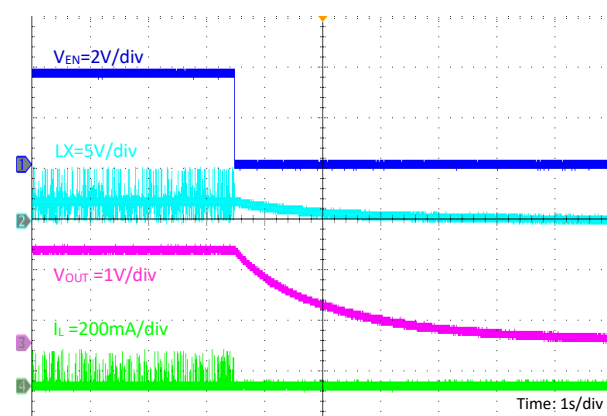

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


EN Enable Power On

$V_{EN}=3.6V, V_{OUT}=1.8V, I_o=1A$

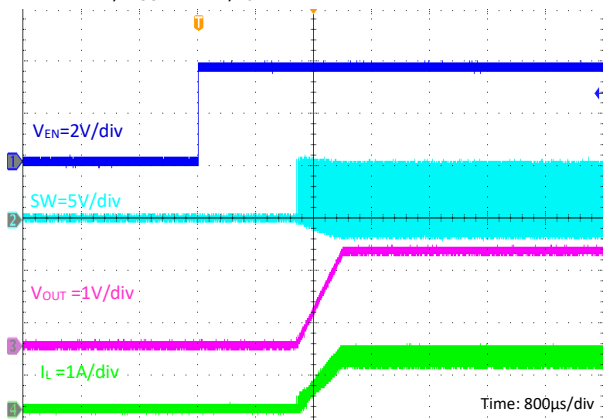


EN Enable Power On

$V_{EN}=3.6V, V_{OUT}=1.8V, I_o=1A$

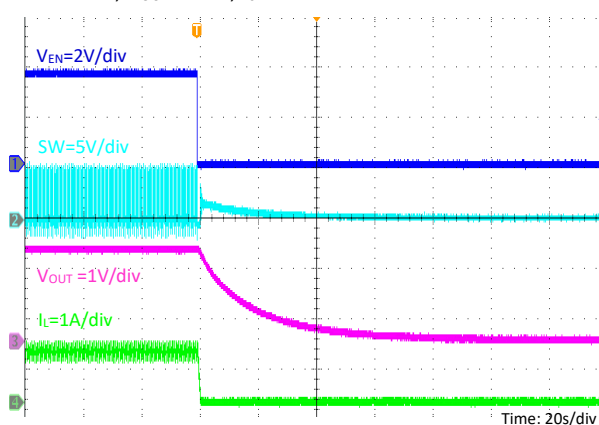


Input Power On

$V_{IN}=5V, V_{OUT}=1.8V, \text{No Load}$

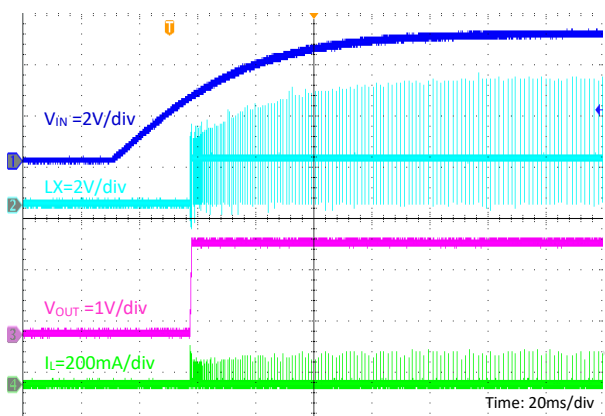


Input Power Down

$V_{IN}=5V, V_{OUT}=1.8V, \text{No Load}$

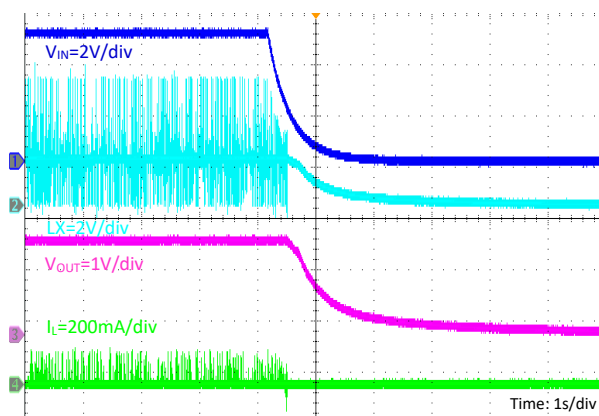


Input Power On

$V_{IN}=5V, V_{OUT}=1.8V, I_o=1A$

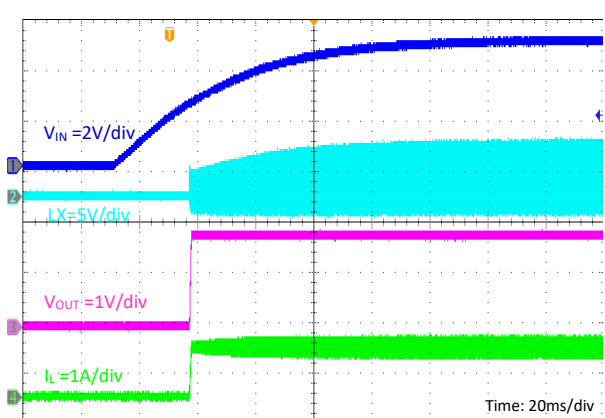

Input Power Down

$V_{IN}=5V, V_{OUT}=1.8V, I_o=1A$

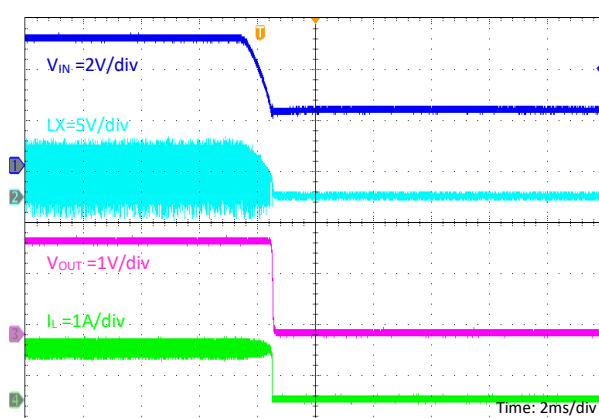

APPLICATION INFORMATION

Setting the Output Voltage

Figure 1 shows the basic application circuit for the SK6648. The SK6648 can be externally programmed. Resistors R1 and R2 in Figure 1 program the output to regulate at a voltage higher than 0.6V. The external resistor sets the output voltage according to the following equation:

$$V_{OUT} = 0.6 \times \left(1 + \frac{R_1}{R_2}\right)$$

$$R_1 = (V_{OUT}/0.6 - 1) \times R_2$$

Inductor Selection

For most designs, 2.2μH inductance can satisfy most application conditions. Inductance value is related to inductor ripple current value, input voltage, output voltage setting and switching frequency. The inductor value can be derived from the following equation:

$$L = \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times \Delta I_L \times f_{OSC}}$$

Where ΔI_L is inductor ripple current. Large value inductors result in lower ripple current and small value inductors result in high ripple current, so inductor value has effect on output voltage ripple value. DC resistance of inductor which has impact on efficiency of DC/DC converter should be taken into account when selecting the inductor.

Input Capacitor Selection

The input capacitor reduces the surge current drawn from the input and switching noise from the device. The input capacitor impedance at the switching frequency should be less than input source impedance to prevent high frequency switching current passing to the input.

A low ESR input capacitor sized for maximum RMS current must be used. Ceramic capacitors with X5R or X7R dielectrics are highly recommended because of their low ESR and small temperature coefficients.


A 4.7μF ceramic capacitor for most applications is sufficient. A large value may be used for improved input voltage filtering.

Output Capacitor Selection

The output capacitor is required to keep the output voltage ripple small and to ensure regulation loop stability. The output capacitor must have low impedance at the switching frequency. Ceramic capacitors with X5R or X7R dielectrics are recommended due to their low ESR and high ripple current ratings. The output ripple V_{OUT} is determined by:

$$\Delta V_{OUT} \leq \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times f_{OSC} \times L} \times \left(ESR + \frac{1}{8 \times f_{osc} \times C3} \right)$$

A 10μF ceramic can satisfy most applications.

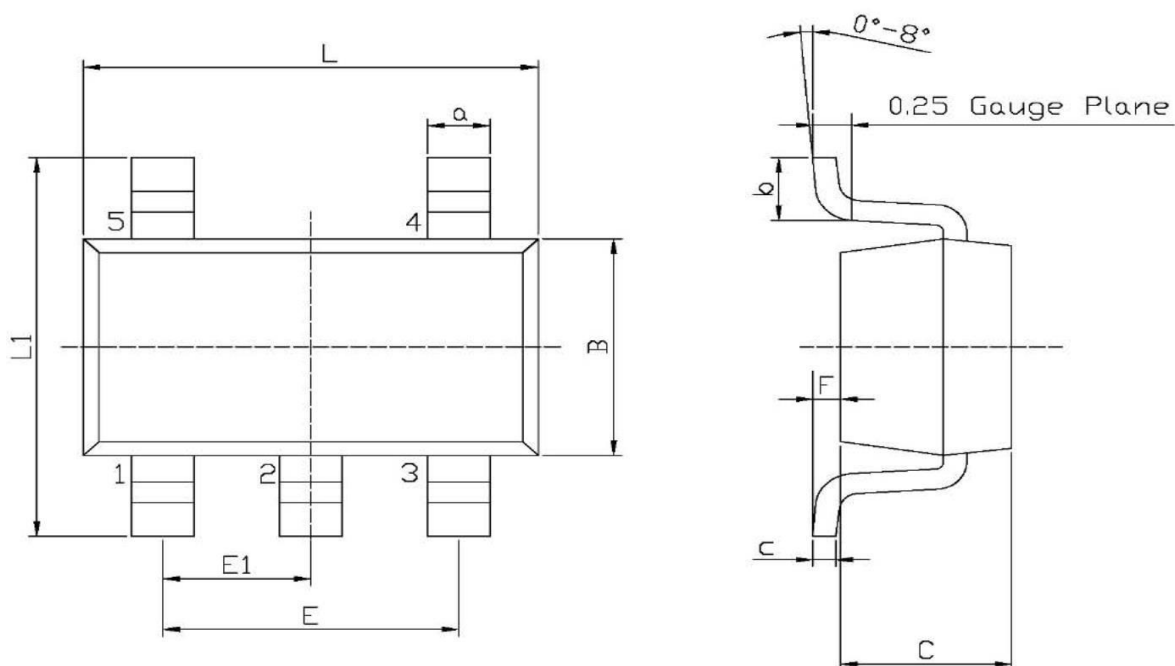PACKAGE DIMENSIONS: SOT23-5


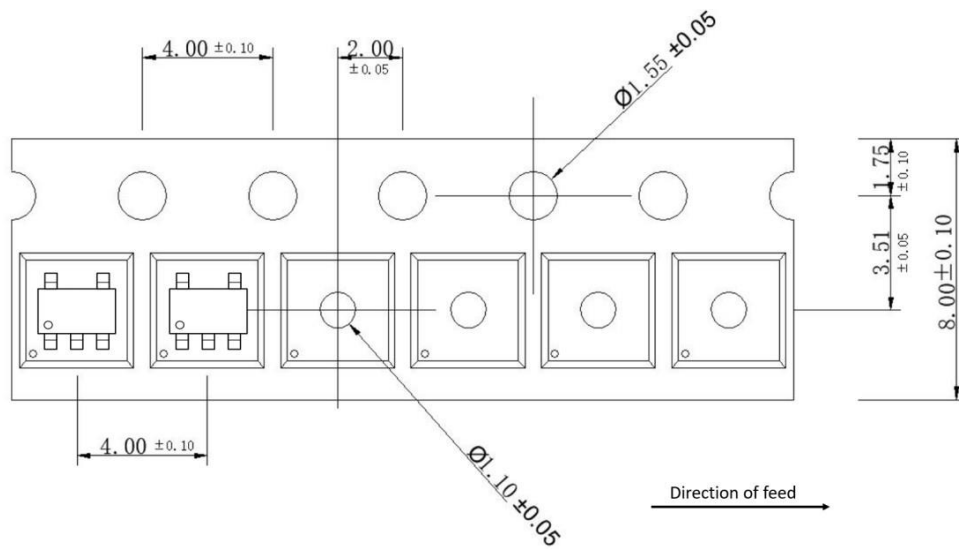
Unit: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.82	3.02	E1	0.85	1.05
B	1.50	1.70	a	0.35	0.50
C	0.90	1.30	c	0.10	0.20
L1	2.60	3.00	b	0.35	0.55
E	1.80	2.00	F	0	0.15


Note:

- 1) All dimensions are in millimeters.
- 2) Package length does not include mold flash, protrusion or gate burr.
- 3) Package width does not include inter lead flash or protrusion.
- 4) Lead popularity (bottom of leads after forming) shall be 0.10 millimeters max.
- 5) Pin 1 is lower left pin when reading top mark from left to right.

TAPE DIMENSIONS: SOT23-5




REEL DIMENSIONS: SOT23-5

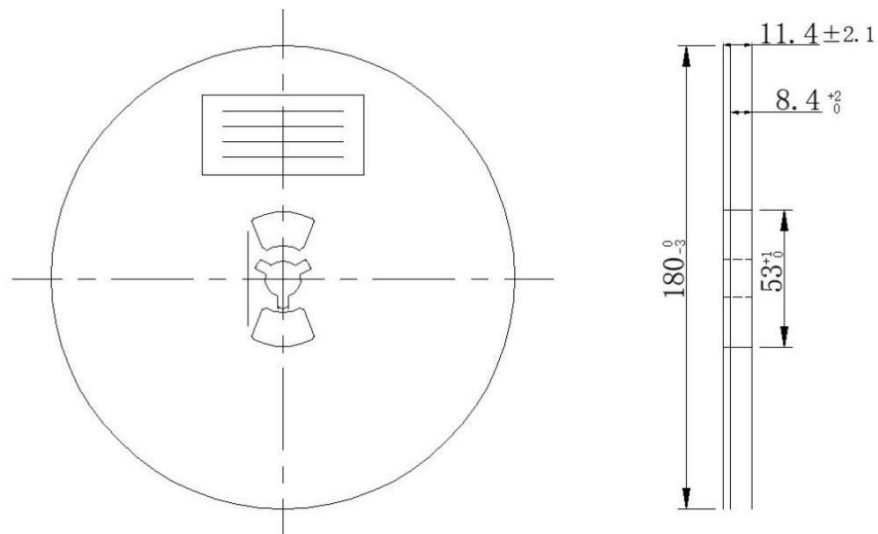

Note:

- 1) All Dimensions are in Millimeter
- 2) Quantity of Units per Reel is 3000
- 3) MSL level is level 3.


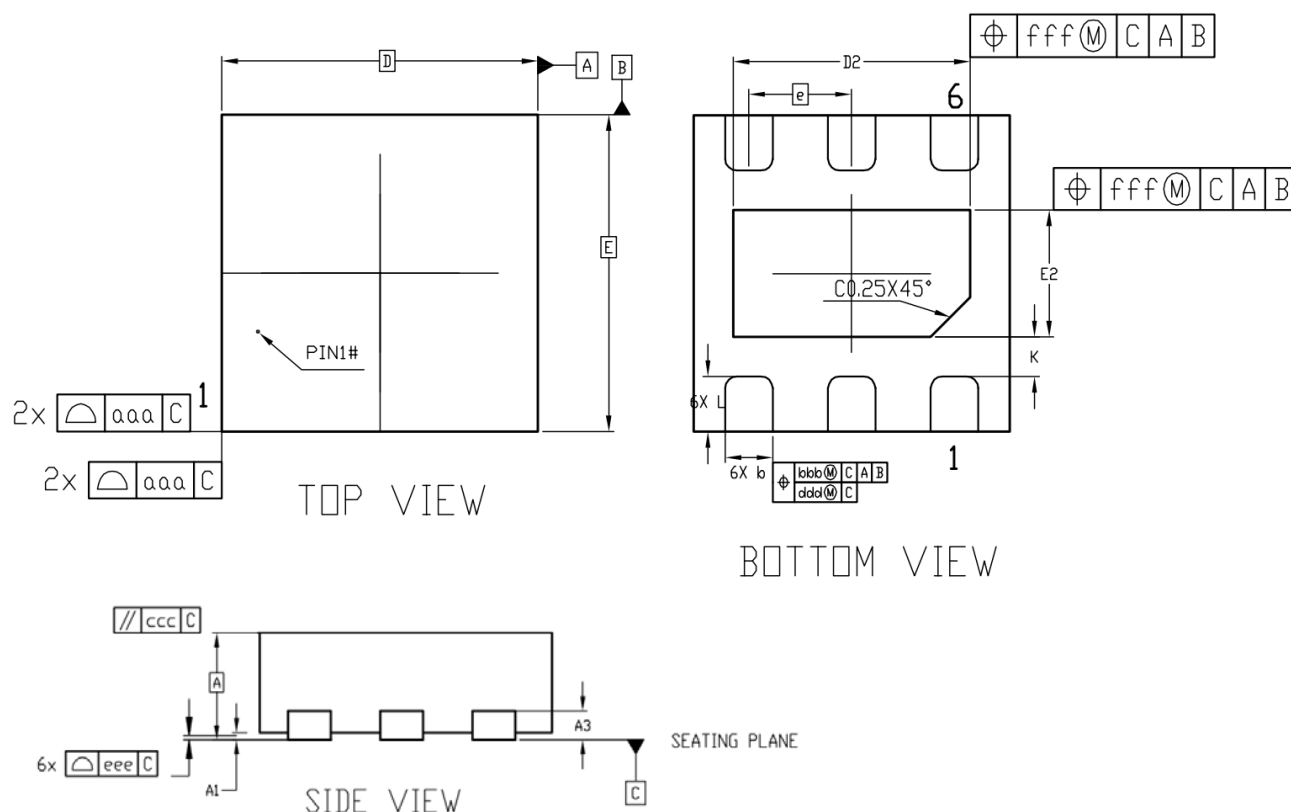
PACKAGE DIMENSION: DFN2x2-6L


Unit: mm

Symbol	Dimensions In Millimeters			Symbol	Dimensions In Millimeters		
	Min	Nom	Max		Min	Nom	Max
A	0.70	0.75	0.80	e	0.65 BSC		
	0.80	0.85	0.90	L	0.30	0.35	0.40
A1	0	0.02	0.05	K	0.25	-	-
A3	-	0.20 REF	-	aaa	0.15		
b	0.25	0.30	0.35	bbb	0.10		
D	2.00 BSC			ccc	0.10		
E	2.00 BSC			ddd	0.05		
D2	1.40	1.50	1.60	eee	0.08		
E2	0.70	0.80	0.90	fff	0.10		

Note:

- 1) All dimensions are in millimeters. Angles are in degree.
- 2) Dimensioning and tolerancing confirm to ASME Y14.5M-1994.
- 3) Unilateral coplanarity zone applies to the exposed heat sink slug as well as the thermals.
- 4) Dimension b applies to metallized terminal and is measured between 0.150mm to 0.30mm from the thermal tip. Dimension b should not be measured in radius area.
- 5) All specs take JEDEC MO-229 for reference.

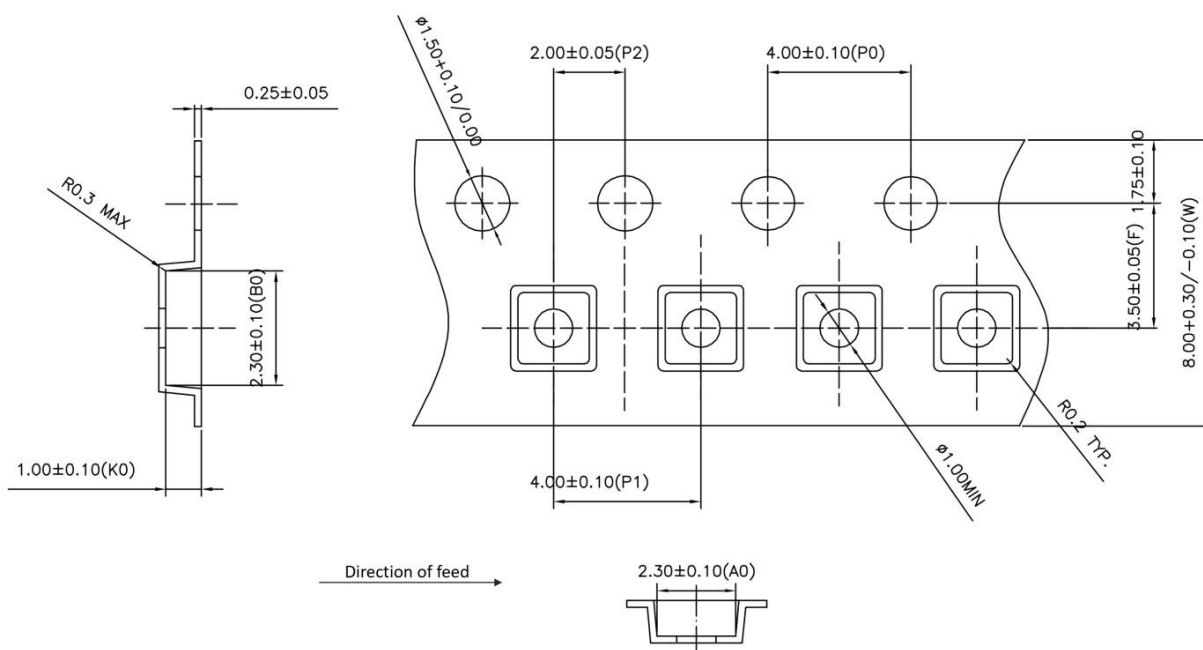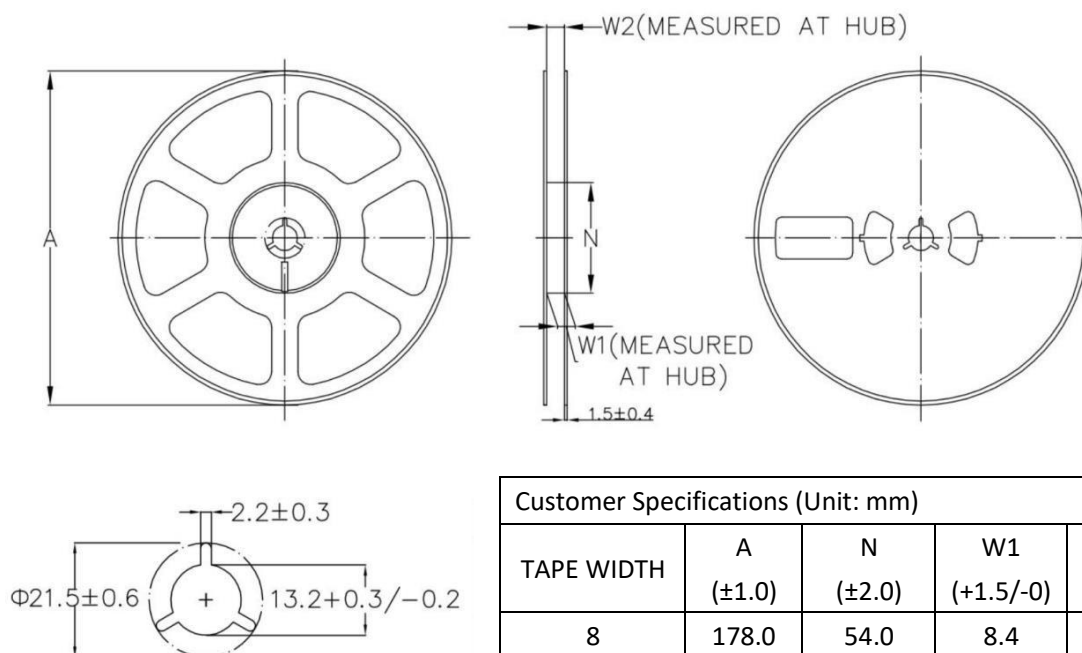TAPE DIMENSIONS: DFN2x2-6L

REEL DIMENSIONS: DFN2x2-6L

Note:

- 1) All Dimensions are in Millimeter
- 2) Quantity of Units per Reel is 3000
- 3) MSL level is level 3.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Controllers](#) category:

Click to view products by [Suntek](#) manufacturer:

Other Similar products are found below :

[NCP1218AD65R2G](#) [NCP1234AD100R2G](#) [NCP1244BD065R2G](#) [NCP1336ADR2G](#) [NCP6153MNTWG](#) [NCP81101BMNTXG](#)
[NCP81205MNTXG](#) [SJE6600](#) [AZ7500BMTR-E1](#) [IR35215MTRPBF](#) [SG3845DM](#) [NCP4204MNTXG](#) [NCP6132AMNR2G](#)
[NCP81102MNTXG](#) [NCP81203MNTXG](#) [NCP81206MNTXG](#) [NX2155HCUPTR](#) [UBA2051C](#) [IR35201MTRPBF](#) [FSL4110LRLX](#)
[NCP1015ST65T3G](#) [NCP1240AD065R2G](#) [NCP1240FD065R2G](#) [NCP1336BDR2G](#) [NCP1361BABAYSNT1G](#) [NCP1230P100G](#)
[NX2124CSTR](#) [SG2845M](#) [NCP1366BABAYDR2G](#) [NCP81101MNTXG](#) [TEA19362T/1J](#) [NCP81174NMNTXG](#) [NCP4308DMTTWG](#)
[NCP4308DMNTWG](#) [NCP4308AMTTWG](#) [NCP1366AABAYDR2G](#) [NCP1256ASN65T1G](#) [NCP1251FSN65T1G](#) [NCP1246BLD065R2G](#)
[MB39A136PFT-G-BND-ERE1](#) [NCP1256BSN100T1G](#) [LV5768V-A-TLM-E](#) [NCP1365BABCYDR2G](#) [NCP1365AABCYDR2G](#)
[IR35204MTRPBF](#) [MCP1633T-E/MG](#) [MCP1633-E/MG](#) [NCV1397ADR2G](#) [NCP81599MNTXG](#) [NCP1246ALD065R2G](#)