



# SAW Components

## SAW duplexer

WCDMA band VIII

<b>Series/type:</b>	<b>B8514</b>
<b>Ordering code:</b>	<b>B39941B8514P810</b>
<b>Date:</b>	<b>April 9, 2013</b>
<b>Version:</b>	<b>2.0</b>


© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


**Preliminary Data**

**Application**


- Low-loss SAW duplexer for mobile telephone WCDMA Band VIII systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 35 MHz
- 50 Ω single-ended in both in Antenna-Rx and Tx-Antenna paths

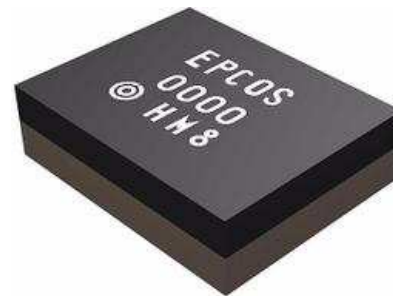
**Features**

- Package size 1.8 x 1.4 x 0.475 mm<sup>3</sup>.
- RoHS compatible
- Package for **Surface Mount Technology (SMT)**
- Ni, Au-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitive Level 3**

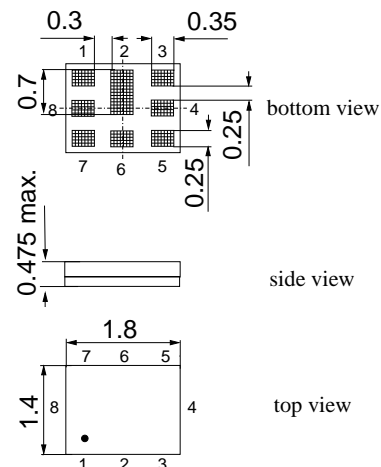
**Pin configuration**

- 1 RX output (single-ended)
- 3 TX input (single-ended)
- 6 Antenna
- 2,4,5,7,8 Ground

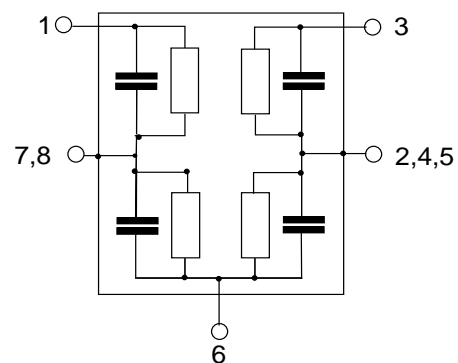

**SAW Components**
**B8514**
**SAW duplexer**
**897.5 / 942.5 MHz**
**Preliminary Data**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50Ω    5.6nH
TX terminating impedance:	Z <sub>TX</sub> = 50Ω
RX terminating impedance:	Z <sub>RX</sub> = 50Ω

Characteristics Tx - Ant					min.	typ. @ 25 °C	max.	
<b>Center frequency</b>	f <sub>C</sub>				—	897.5	—	MHz
<b>Maximum insertion attenuation</b>								
@f <sub>Carrier</sub>	882.4 ... 912.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>		—	2.0	2.7	dB
	880.0 ... 915.0	MHz			—	2.2	3.9	dB
	880.0 ... 915.0	MHz			—	2.2	2.8 <sup>3)</sup>	dB
<b>Amplitude ripple (p-p)</b>								
@f <sub>Carrier</sub>	882.4 ... 912.6	MHz	Δα <sub>WCDMA</sub> <sup>1)</sup>		—	1.0	2.1	dB
	880.0 ... 915.0	MHz			—	1.2	3.1	dB
<b>Error Vector Magnitude</b>								
@f <sub>Carrier</sub>	882.4 ... 912.6	MHz	EVM <sup>2)</sup>		—	2.3	6.0	%
<b>VSWR</b>								
TX port	880.0 ... 915.0	MHz			—	1.7	2.0	
ANT port	880.0 ... 915.0	MHz			—	1.7	2.2	
<b>Attenuation</b>								
	10.0 ... 716.0	MHz	α		30	35	—	dB
	716.0 ... 728.0	MHz			30	35	—	dB
	728.0 ... 793.0	MHz			30	35	—	dB
@f <sub>Carrier</sub>	927.4 ... 957.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>		42	51	—	dB
@f <sub>Carrier</sub>	927.4 ... 957.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>		44 <sup>3)</sup>	51	—	dB
	1559.0 ... 1563.0	MHz			42	45	—	dB

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page 8.

2) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

3) T = +25 °C

**Preliminary Data**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω    5.6nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω
RX terminating impedance:	Z <sub>RX</sub> = 50 Ω

Characteristics Tx - Ant	min.	typ. @ 25 °C	max.	
<b>Attenuation</b> α				
1565.42 ... 1573.374 MHz	42	45	—	dB
1573.374 ... 1577.466 MHz	40	45	—	dB
1577.466 ... 1585.42 MHz	40	45	—	dB
1597.5515 ... 1605.886 MHz	40	44	—	dB
1760.0 ... 1830.0 MHz	35	38	—	dB
1830.0 ... 1880.0 MHz	27	36	—	dB
2110.0 ... 2170.0 MHz	27	33	—	dB
2400.0 ... 2500.0 MHz	26	30	—	dB
2620.0 ... 2745.0 MHz	22	27	—	dB
3520.0 ... 3660.0 MHz	20	26	—	dB
4400.0 ... 4575.0 MHz	20	25	—	dB
5150.0 ... 5490.0 MHz	10	19	—	dB
5725.0 ... 5850.0 MHz	10	14	—	dB

**SAW Components**
**B8514**
**SAW duplexer**
**897.5 / 942.5 MHz**
**Preliminary Data**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω    5.6nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω
RX terminating impedance:	Z <sub>RX</sub> = 50 Ω

Charcteristics Rx - Ant						min.	typ. @25 °C	max.	
<b>Center frequency</b>				f <sub>C</sub>		—	942.5	—	MHz
<b>Maximum insertion attenuation</b>									
	@f <sub>Carrier</sub>	927.4 ... 957.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>		—	1.9	2.6	dB
		925.0 ... 960.0	MHz			—	2.4	4.3	dB
		925.0 ... 960.0	MHz			—	2.4	2.8 <sup>3)</sup>	dB
<b>Amplitude ripple (p-p)</b>									
	@f <sub>Carrier</sub>	927.4 ... 957.6	MHz	Δα <sub>WCDMA</sub> <sup>1)</sup>		—	0.6	1.2	dB
		925.0 ... 960.0	MHz			—	2.7	3.1	dB
<b>Error Vector Magnitude</b>									
	@f <sub>Carrier</sub>	927.4 ... 957.6	MHz	EVM <sup>2)</sup>		—	3.4	8.0	%
	@f <sub>Carrier</sub>	927.4 ... 957.6	MHz	EVM <sup>4)</sup>		—	3.4	5.0 <sup>3)</sup>	%
<b>VSWR</b>									
	RX port	925.0 ... 960.0	MHz			—	1.7	2.2	
	ANT port	925.0 ... 960.0	MHz			—	1.9	2.2	
<b>Attenuation</b>				α					
		10.0 ... 880.0	MHz			40	58	—	dB
		902.5 ... 910.0	MHz			30	55	—	dB
	@f <sub>Carrier</sub>	882.4 ... 912.6	MHz	α <sub>WCDMA</sub> <sup>1)</sup>		45	55	—	dB
		980.0 ... 1045.0	MHz			20	29	—	dB

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page 8.

2) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141

3) T = +25 °C

**Preliminary Data**

**Characteristics**

Temperature range for specification:	T = -20 °C to +85 °C
ANT terminating impedance:	Z <sub>ANT</sub> = 50 Ω    5.6nH
TX terminating impedance:	Z <sub>TX</sub> = 50 Ω
RX terminating impedance:	Z <sub>RX</sub> = 50 Ω

<b>Charcteristics Rx - Ant</b>	<b>min.</b>	<b>typ. @25 °C</b>	<b>max.</b>	
<b>Attenuation</b>				
1045.0 ... 1805.0 MHz	35	52	—	dB
1805.0 ... 1920.0 MHz	40	51	—	dB
1920.0 ... 2400.0 MHz	35	48	—	dB
2400.0 ... 2500.0 MHz	40	47	—	dB
2685.0 ... 2880.0 MHz	40	46	—	dB
2880.0 ... 3700.0 MHz	35	42	—	dB
3700.0 ... 3840.0 MHz	35	42	—	dB
4625.0 ... 4800.0 MHz	35	41	—	dB
5550.0 ... 5725.0 MHz	30	38	—	dB
5725.0 ... 5875.0 MHz	30	37	—	dB

**SAW Components**
**B8514**
**SAW duplexer**
**897.5 / 942.5 MHz**
**Preliminary Data**
**SMD**
**Characteristics**

Temperature range for specification:  $T = -20\text{ °C to }+85\text{ °C}$   
 ANT terminating impedance:  $Z_{ANT} = 50\ \Omega \parallel 5.6\text{ nH}$   
 TX terminating impedance:  $Z_{TX} = 50\ \Omega$   
 RX terminating impedance:  $Z_{RX} = 50\ \Omega$

<b>Charcteristics Tx - Rx</b>					<b>min.</b>	<b>typ. @25 °C</b>	<b>max.</b>	
<b>Isolation</b>								
@f <sub>Carrier</sub>	882.4	...	912.6	MHz $\alpha_{WCDMA}^{1)}$	53	56	—	dB
	880.0	...	915.0	MHz	52	55	—	dB
@f <sub>Carrier</sub>	927.4	...	957.6	MHz $\alpha_{WCDMA}^{1)}$	48	59	—	dB
@f <sub>Carrier</sub>	927.4	...	957.6	MHz $\alpha_{WCDMA}^{1)}$	55 <sup>2)</sup>	59	—	dB

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page 8.

2) T= +15°C to +85°C

<b>SAW Components</b>	<b>B8514</b>
-----------------------	--------------

<b>SAW duplexer</b>	<b>897.5 / 942.5 MHz</b>
---------------------	--------------------------

**Preliminary Data**

**Maximum ratings**

Storage temperature range	T <sub>stg</sub>	-40/+85 <sup>1)</sup>	°C	
DC voltage	V <sub>DC</sub>	5 <sup>2)</sup>	V	
ESD voltage	V <sub>ESD</sub>	100 <sup>3)</sup>	V	machine model, 1 pulse
Input power at	P <sub>IN</sub>			
880.0 ... 915.0 MHz		29	dBm	} continuous wave 50 °C, 5000 h
elsewhere		10	dBm	

1) extended upperlimit: 96h@125°C acc. to IEC 60062-2-2 Bb

2) 168h Damp Heat Steady State acc. to IEC 60068-2-67 Cy

3) acc. to JESD22-A115A (machine model), 1 negative & 1 positive pulse.

**Annotation for characteristics section**

Attenuation of WCDMA signal ("Powertransferfunction",  $\alpha_{\text{WCDMA}}$ ) is determined by


$$\int_{-\infty}^{\infty} |S_{\text{ds21}}(f)H_{\text{RRC}}(f - f_{\text{Carrier}})|^2 df$$

$f_{\text{Carrier}}$  according to 3GPP TS 25.101 (e.g. for UMTS-Passband,  $f_{\text{Carrier}}$  ranges from 2112.4 MHz (lowest Rx channel) to 2167.6 MHz (highest Rx channel)).  $H_{\text{RRC}}(f)$  is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:


$$\int_{-\infty}^{\infty} |H_{\text{RRC}}(f)|^2 df = 1$$




Frequency response Tx-Antenna (Power transfer function)

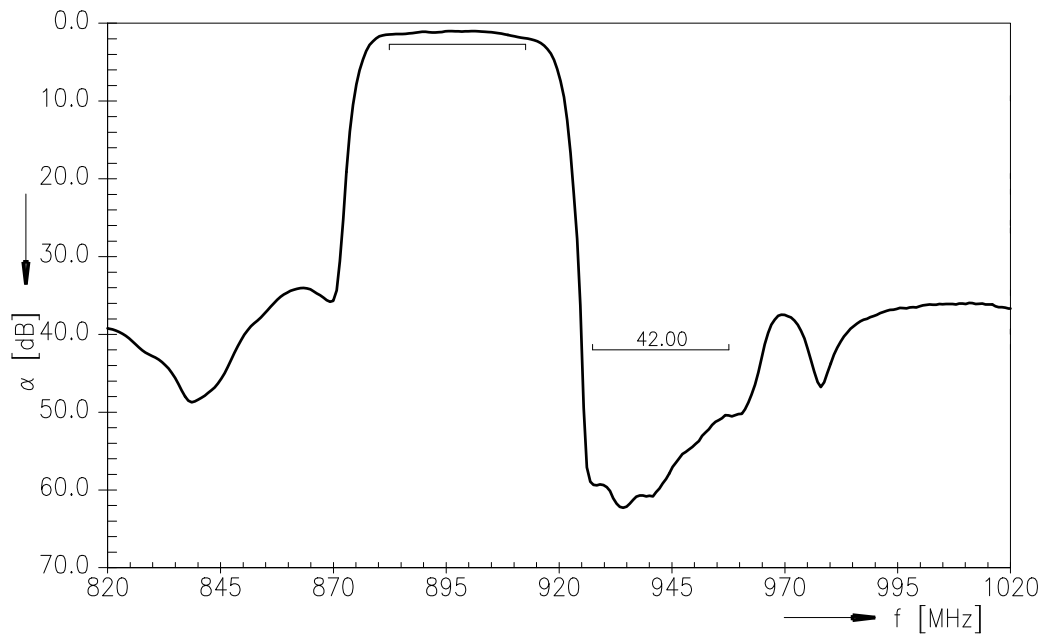


Frequency response Tx-Antenna (wideband)

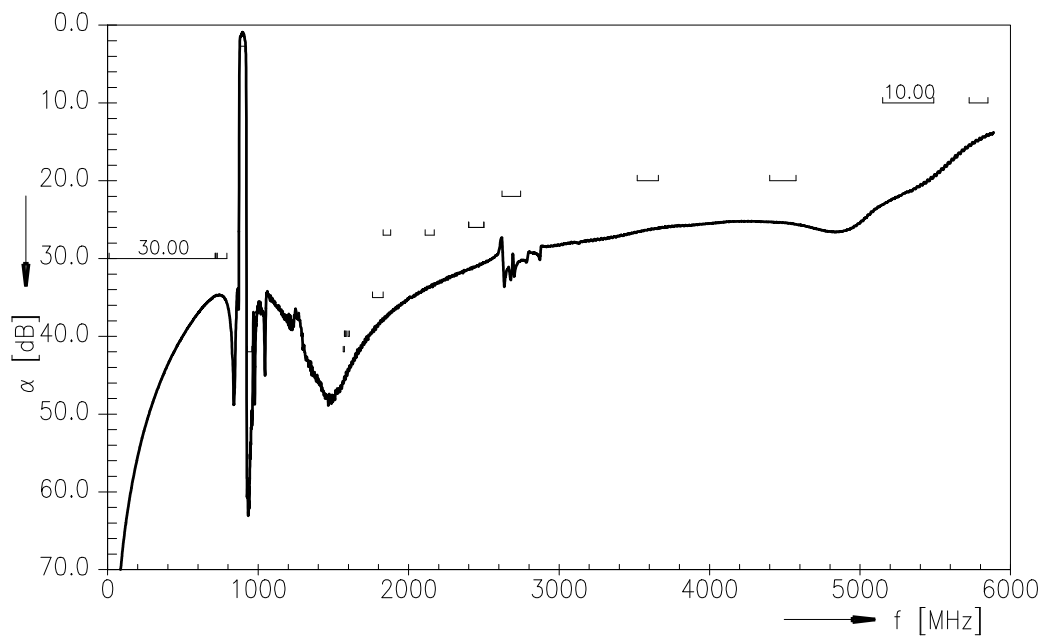

Frequency response Antenna-Rx (Power transfer function)

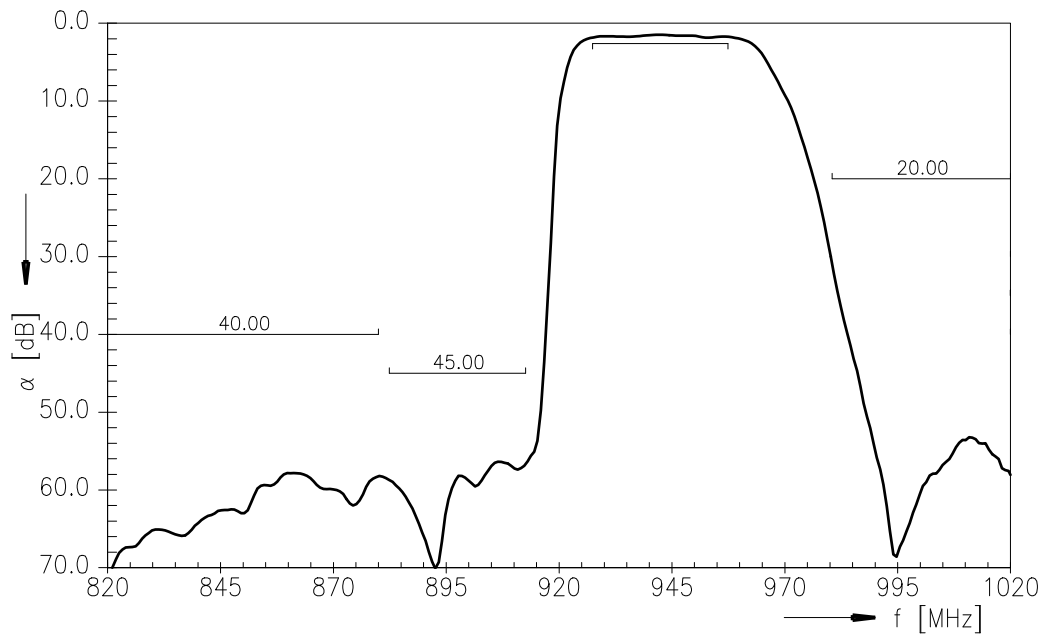


Frequency response Antenna-Rx (wideband)

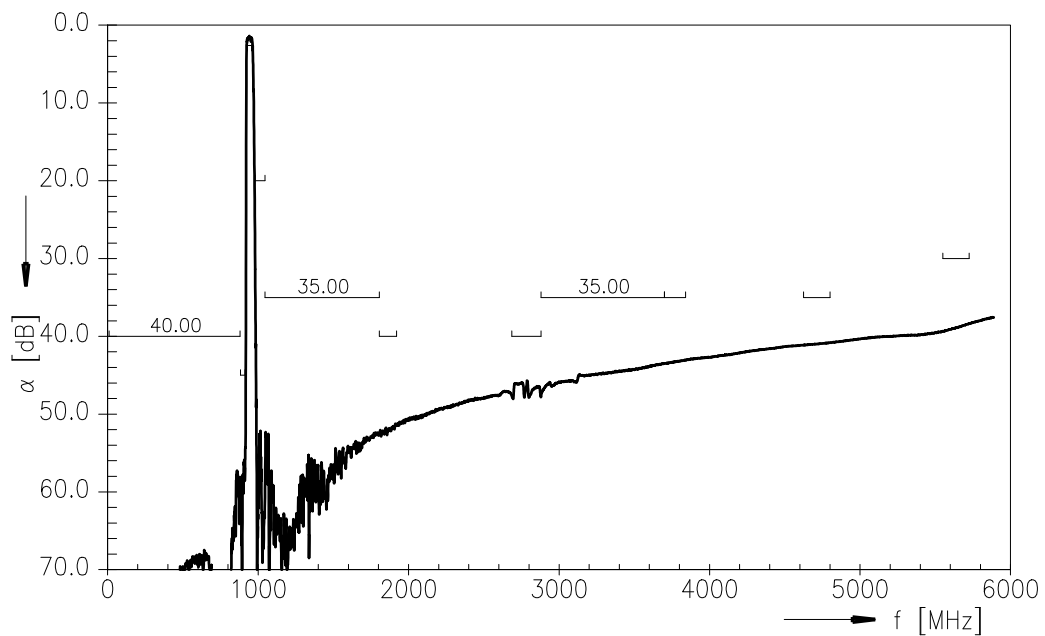




Frequency response Tx-Rx (Power transfer function)

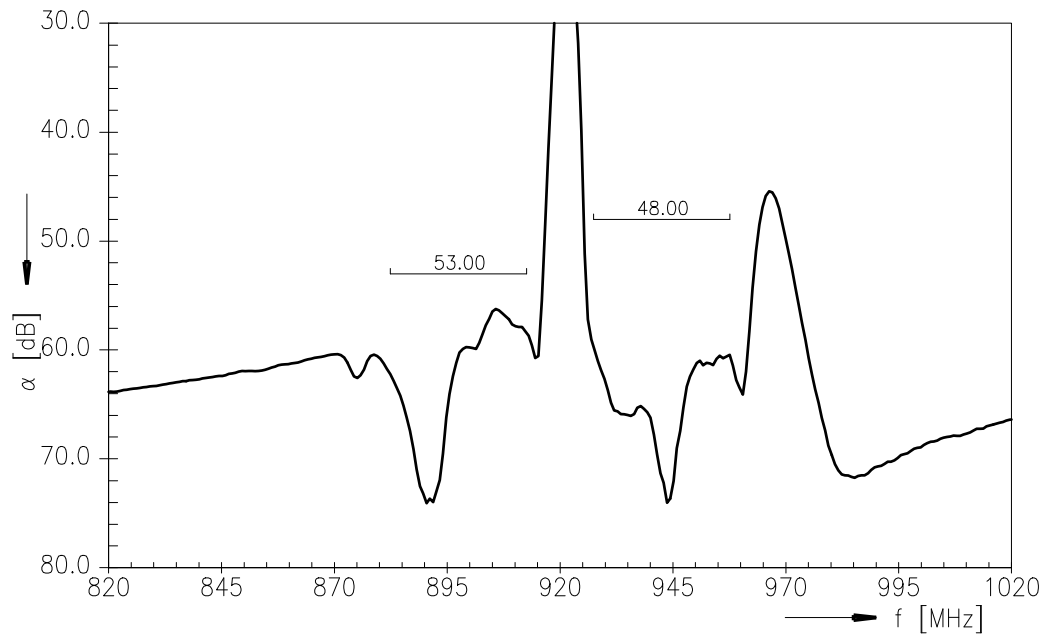

Frequency response Tx-Rx (wideband)

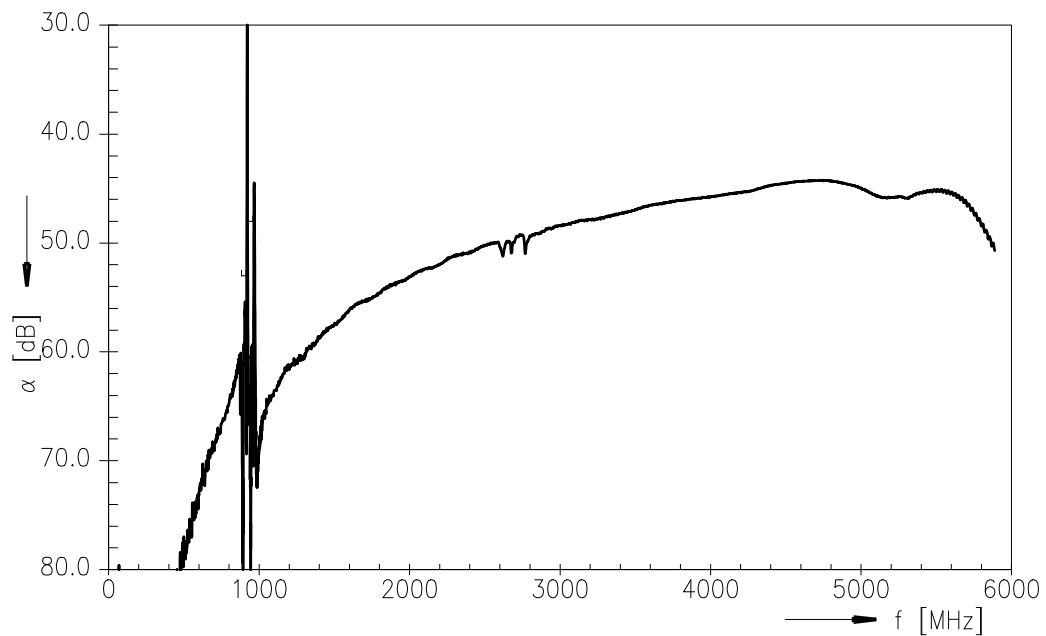

**SAW Components**

**B8514**







**SAW duplexer**

**897.5 / 942.5 MHz**

**Preliminary Data**



**Return loss     $S_{11}$  Tx-port     $S_{22}$  Antenna-port     $S_{33}$  Rx-portReferences**

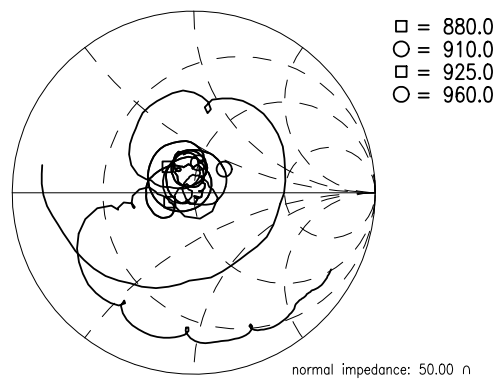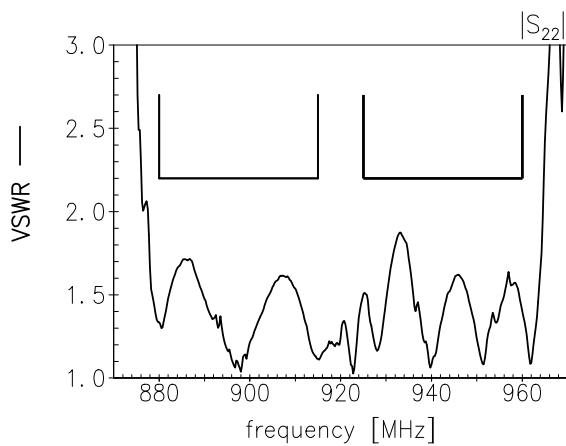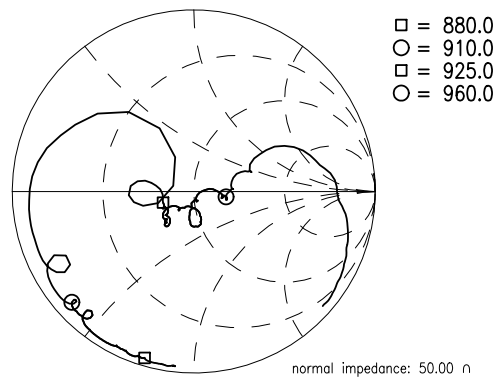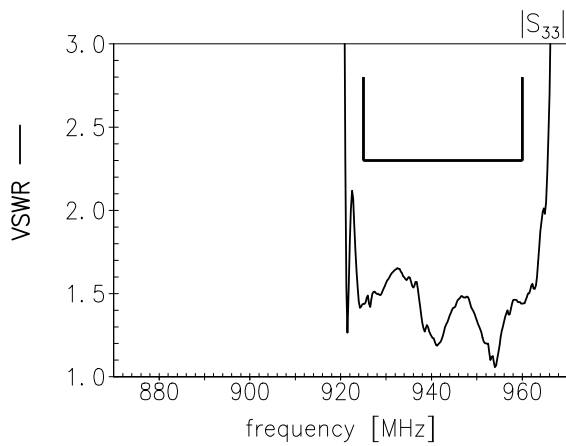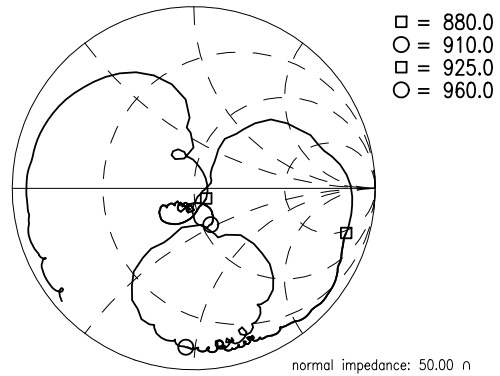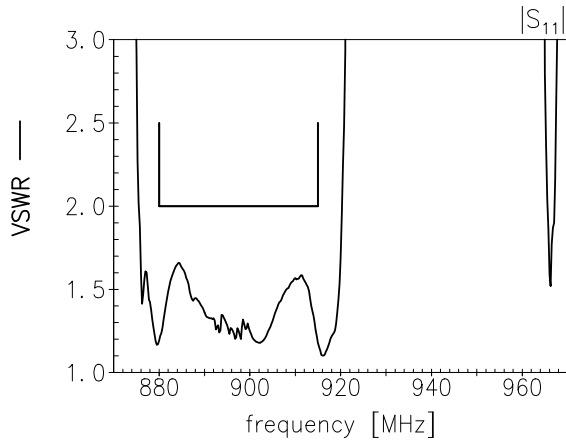

Please read *cautions and warnings* and *important notes* at the end of this document.

<b>SAW Components</b>	<b>B8514</b>
<b>SAW duplexer</b>	<b>897.5 / 942.5 MHz</b>

Preliminary Data



#### References

<b>Type</b>	B8514
<b>Ordering code</b>	B39941B8514P810
<b>Marking and package</b>	C61157-A8-A38
<b>Packaging</b>	F61074-V8247-Z000
<b>Date codes</b>	L_1126
<b>S-parameters</b>	B8514_NB_UN.s3p, B8514_WB_UN.s3p See file header for pin/port assignment.
<b>Soldering profile</b>	S_6001
<b>RoHS compatible</b>	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 <sup>th</sup> , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
<b>Moldability</b>	Before using in overmolding environment, please contact your EPCOS sales office.
<b>Matching coils</b>	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>

For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com).

**Published by EPCOS AG**  
**Systems, Acoustics, Waves Business Group**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2013. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning category](#):*

*Click to view products by [TDK manufacturer](#):*

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)  
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)  
[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)  
[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)  
[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)  
[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)  
[B39242B4360P810](#) [B39781B8005P810](#)