



CTVS – Ceramic transient voltage suppressors

Leaded transient voltage/RFI suppressors (SHCVs)

Series/Type:

Date: December 2019

Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

EPCOS type designation system for leaded transient voltage/ RFI suppressors

| | | | | | | | | |
|---|---|---|----|---|---|-----|---|---|
| SR | 1 | S | 14 | B | M | 474 | X | G |
| SR \triangleq Leaded, SHCV series | | | | | | | | |
| EIA case sizes of used chips: 6 \triangleq 12 x 06 / 3.2 x 1.6 mm 1 \triangleq 18 x 12 / 4.5 x 3.2 mm 2 \triangleq 22 x 20 / 5.7 x 5.0 mm | | | | | | | | |
| Varistor voltage tolerance: K \triangleq $\pm 10\%$ S \triangleq Special tolerance | | | | | | | | |
| Maximum RMS operating voltage (V_{RMS}): 14 \triangleq 14 V 20 \triangleq 20 V 35 \triangleq 35 V | | | | | | | | |
| Special varistor voltage tolerance: B \triangleq Special tolerance | | | | | | | | |
| Capacitance tolerance: M \triangleq $\pm 20\%$ | | | | | | | | |
| Capacitance value: 474 \triangleq $47 \cdot 10^4$ pF \triangleq 0.47 μ F | | | | | | | | |
| Capacitor ceramic: X \triangleq X7R | | | | | | | | |
| Taping mode: G \triangleq Taped version - \triangleq Bulk | | | | | | | | |

Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

Features

- EMI/ RFI noise suppression and transient overvoltage protection integrated in a single component
- Suppression of transients, caused by sudden interruption of currents
- Protection against electrical transients in automotive battery lines (acc. to ISO 7637-2 and ISO 16750-2)
- High capacitance (up to 4.7 μ F)
- Low clamping voltage
- RoHS-compatible
- Suitable for lead-free soldering
- PSpice simulation models available



Applications

- RFI noise suppression and transient overvoltage protection on DC lines of small motors, windscreen wipers, window lifters, mirrors, central locking, memory seat, sunroof

Design

- Combination of multilayer RF filter capacitor and multilayer varistor
- Coating: flame-retardant to UL 94 V0, epoxy resin
- Terminals: tinned iron wire, RoHS-compatible

V/I characteristics and derating curves

V/I and derating curves are attached to the data sheet. The curves are sorted by V_{RMS} and then by case size, which is included in the type designation.

General technical data

| | | | | |
|-------------------------------------|----------------|-----------------|--------------|--------------|
| Maximum RMS operating voltage | | $V_{RMS,max}$ | 14 ... 35 | V |
| Maximum DC operating voltage | | $V_{DC,max}$ | 16 ... 45 | V |
| Maximum surge current | (8/20 μ s) | $I_{surge,max}$ | 100 ... 1200 | A |
| Maximum load dump energy | (10 pulses) | W_{LD} | 1.5 ... 12 | J |
| Maximum jump-start voltage | (5 min) | V_{jump} | 24.5 ... 45 | V |
| Maximum clamping voltage | (8/20 μ s) | $V_{clamp,max}$ | 38 ... 90 | V |
| Nominal capacitance | (1 kHz, 0.5 V) | C_{nom} | 220 ... 4700 | nF |
| Insulation resistance | | R_{ins} | ≥ 10 | M Ω |
| Response time | | t_{resp} | < 25 | ns |
| Operating temperature ¹⁾ | | T_{op} | -55/+125 | $^{\circ}$ C |
| Storage temperature | | LCT/UCT | -55/+150 | $^{\circ}$ C |

1) Operating temperatures above +85 $^{\circ}$ C can cause a change in color of the coating material, which has no impact on the reliability of the components.

Leaded transient voltage/RFI suppressors (SHCVs)
SHCV series
Electrical specifications and ordering codes
Maximum ratings ($T_{op,max} = 125\text{ }^{\circ}\text{C}$)

| Type | Ordering code | $V_{RMS,max}$ | $V_{DC,max}$ | $I_{surge,max}$ (8/20 μs) | W_{max} (2 ms) | W_{LD} (10 pulses) | $P_{diss,max}$ |
|--------------|-----------------|---------------|--------------|--|---------------------|-------------------------|----------------|
| | | V | V | A | mJ | J | mW |
| SR1S14BM105X | B72587G3140S200 | 14 | 16 | 800 | 2400 | 6 | 15 |
| SR1S14BM155X | B72587H3140S200 | 14 | 16 | 800 | 2400 | 6 | 15 |
| SR1S14BM474X | B72587E3140S200 | 14 | 16 | 800 | 2400 | 6 | 15 |
| SR2S14BM155X | B72547H3140S200 | 14 | 16 | 1200 | 5800 | 12 | 30 |
| SR2S14BM474X | B72547E3140S200 | 14 | 16 | 1200 | 5800 | 12 | 30 |
| SR2S14BM475X | B72547L3140S200 | 14 | 16 | 1200 | 5800 | 12 | 30 |
| SR6K14M224X | B72527C3140K000 | 14 | 18 | 200 | 500 | 1.5 | 8 |
| SR1K20M105X | B72587G3200K000 | 20 | 26 | 800 | 3000 | 6 | 15 |
| SR1K20M155X | B72587H3200K000 | 20 | 26 | 800 | 3000 | 6 | 15 |
| SR1K20M225X | B72587J3200K000 | 20 | 26 | 800 | 3000 | 6 | 15 |
| SR1K20M474X | B72587E3200K000 | 20 | 26 | 800 | 3000 | 6 | 15 |
| SR2K20M105X | B72547G3200K000 | 20 | 26 | 1200 | 7800 | 12 | 30 |
| SR2K20M155X | B72547H3200K000 | 20 | 26 | 1200 | 7800 | 12 | 30 |
| SR2K20M474X | B72547E3200K000 | 20 | 26 | 1200 | 7800 | 12 | 30 |
| SR6K20M105X | B72527G3200K000 | 20 | 26 | 200 | 700 | 1.5 | 8 |
| SR1K30M155X | B72587H3300K000 | 30 | 38 | 800 | 4200 | 6 | 15 |
| SR6K35M105X | B72527G3350K000 | 35 | 45 | 100 | 400 | 1.5 | 8 |
| SR6K35M474X | B72527E3350K000 | 35 | 45 | 100 | 400 | 1.5 | 8 |

Leaded transient voltage/RFI suppressors (SHCVs)


SHCV series

Characteristics (T_A = 25 °C)

| Type | V _V (1 mA) | ΔV _V | V _{jump} (5 min) | V _{clamp,max} | I _{clamp} (8/20 μs) | C _{nom} (1 kHz, 0.5 V) | ΔC _{nom} |
|--------------|--------------------------|-----------------|------------------------------|------------------------|---------------------------------|------------------------------------|-------------------|
| | V | % | V | V | A | nF | % |
| SR1S14BM105X | 22 | +23/-0 | 24.5 | 40 | 5 | 1000 | ±20 |
| SR1S14BM155X | 22 | +23/-0 | 24.5 | 40 | 5 | 1500 | ±20 |
| SR1S14BM474X | 22 | +23/-0 | 24.5 | 40 | 5 | 470 | ±20 |
| SR2S14BM155X | 22 | +23/-0 | 24.5 | 40 | 10 | 1500 | ±20 |
| SR2S14BM474X | 22 | +23/-0 | 24.5 | 40 | 10 | 470 | ±20 |
| SR2S14BM475X | 22 | +23/-0 | 24.5 | 40 | 10 | 4700 | ±20 |
| SR6K14M224X | 22 | ±10 | 24.5 | 38 | 1 | 220 | ±20 |
| SR1K20M105X | 33 | ±10 | 26 | 58 | 5 | 1000 | ±20 |
| SR1K20M155X | 33 | ±10 | 26 | 58 | 5 | 1500 | ±20 |
| SR1K20M225X | 33 | ±10 | 26 | 58 | 5 | 2200 | ±20 |
| SR1K20M474X | 33 | ±10 | 26 | 58 | 5 | 470 | ±20 |
| SR2K20M105X | 33 | ±10 | 26 | 58 | 10 | 1000 | ±20 |
| SR2K20M155X | 33 | ±10 | 26 | 58 | 10 | 1500 | ±20 |
| SR2K20M474X | 33 | ±10 | 26 | 58 | 10 | 470 | ±20 |
| SR6K20M105X | 33 | ±10 | 26 | 54 | 1 | 1000 | ±20 |
| SR1K30M155X | 47 | ±10 | 45 | 77 | 5 | 1500 | ±20 |
| SR6K35M105X | 56 | ±10 | 45 | 90 | 1 | 1000 | ±20 |
| SR6K35M474X | 56 | ±10 | 45 | 90 | 1 | 470 | ±20 |

Temperature derating


Climatic category: -55/+125 °C

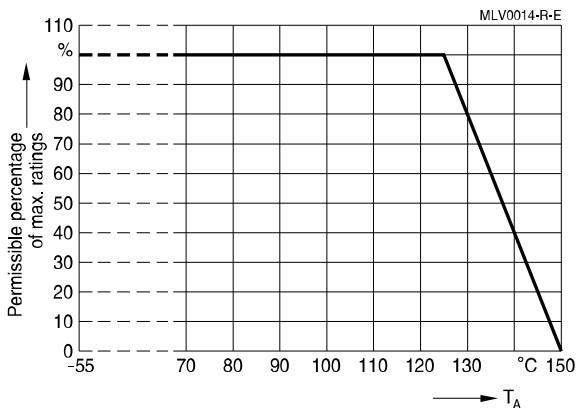

Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

Dimensional drawing



$$[e] = 5.0 \pm 1$$

Offset = 0.0 ± 1

1) Seating plane to IEC 60717

VAR0394-B

Dimensions in mm

| Type | w _{max} | h _{max} | s _{max} |
|--------------|------------------|------------------|------------------|
| SHCV | | | |
| SR1 ... 474X | 7.3 | 7.8 | 3.7 |
| SR1 ... 105X | 7.3 | 7.8 | 3.7 |
| SR1 ... 155X | 7.3 | 7.8 | 3.7 |
| SR1 ... 225X | 7.3 | 7.8 | 4.1 |
| SR2 ... 474X | 7.8 | 9.0 | 3.6 |
| SR2 ... 105X | 7.8 | 9.0 | 4.1 |
| SR2 ... 155X | 7.8 | 9.0 | 4.1 |
| SR2 ... 475X | 7.8 | 9.0 | 4.1 |
| SR6 ... | 6.0 | 7.5 | 4.5 |

Delivery mode

| Designation | Taping mode | Ordering code, last two digits |
|-------------|--------------------|--------------------------------|
| - | Bulk | B725*****00 |
| G | Taped on reel | B725*****51 |
| GA | Taped in AMMO pack | B725*****54 |
| M14 | Lead length 14 mm | B725*****33 |

Standard delivery mode for SHCV types is bulk. Taped versions on reel, AMMO pack and special lead length available upon request.

For further information on taping please contact EPCOS.

Packing units for:

| Type | Pieces |
|-----------|--------|
| SR6 | 2000 |
| SR1 / SR2 | 1000 |

Leaded transient voltage/RFI suppressors (SHCVs)


SHCV series

Soldering instructions

Soldering

Components with wire leads such as leaded transient voltage/ RFI suppressors (SHCVs) can be soldered using all conventional methods.

Recommended temperature profile in wave soldering

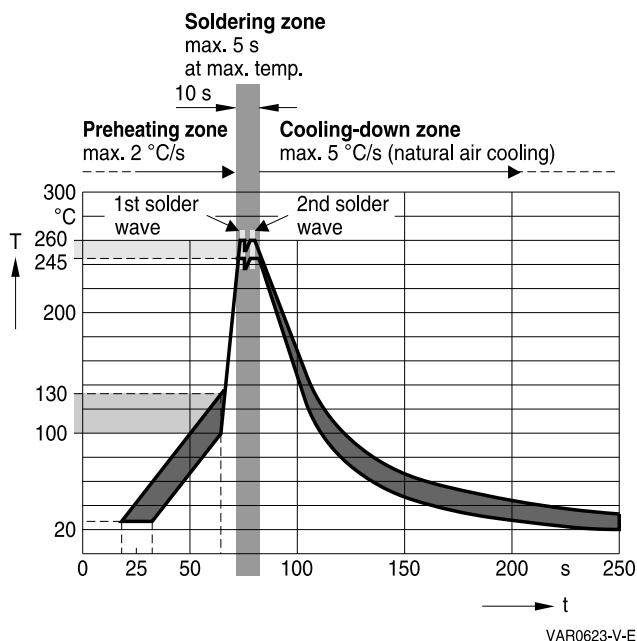

Storage

The SHCV type series should be soldered after shipment from EPCOS within the time specified: 24 months.

The parts are to be left in the original packing to avoid any soldering problems caused by oxidized terminals. Storage temperature – 25 to 45 °C.

Max. relative humidity (without condensation):

- < 75% annual average,
- < 95% on max. 30 days per annum.

Standards


IEC 60068-2-20

Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

Typical characteristics

Capacitance change $\Delta C/C_{25}$ versus temperature T

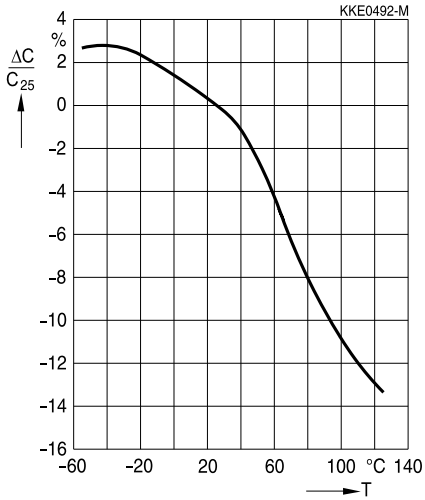


Note:

The capacitance and the dissipation factor shall meet the specified values 1000 hours after the last heat treatment above the curie temperature.


Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

V/I characteristics

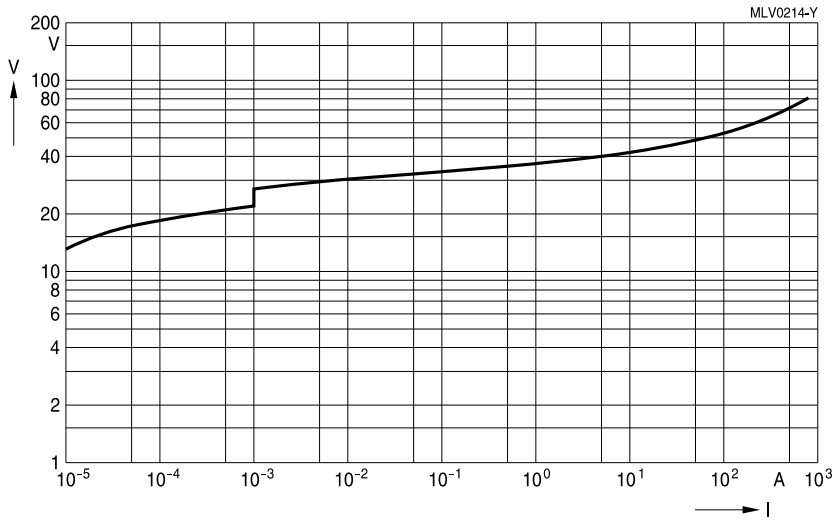

SR1S14B*

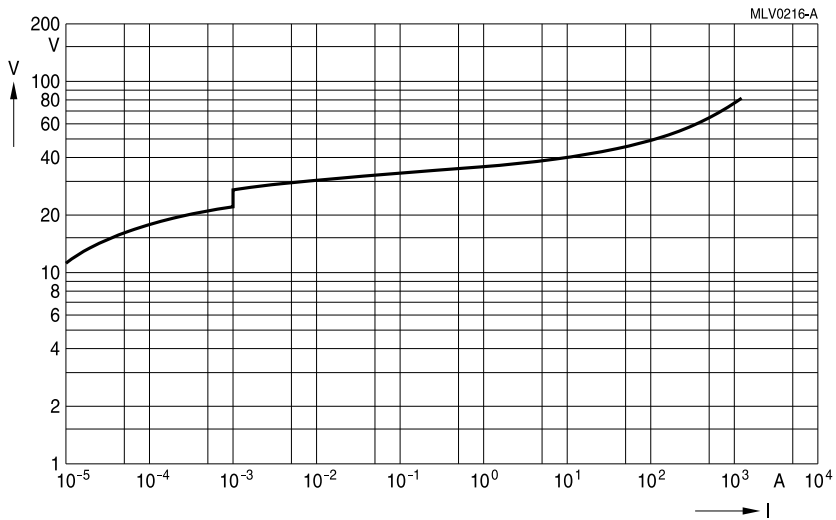


SR2S14B*


Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

V/I characteristics

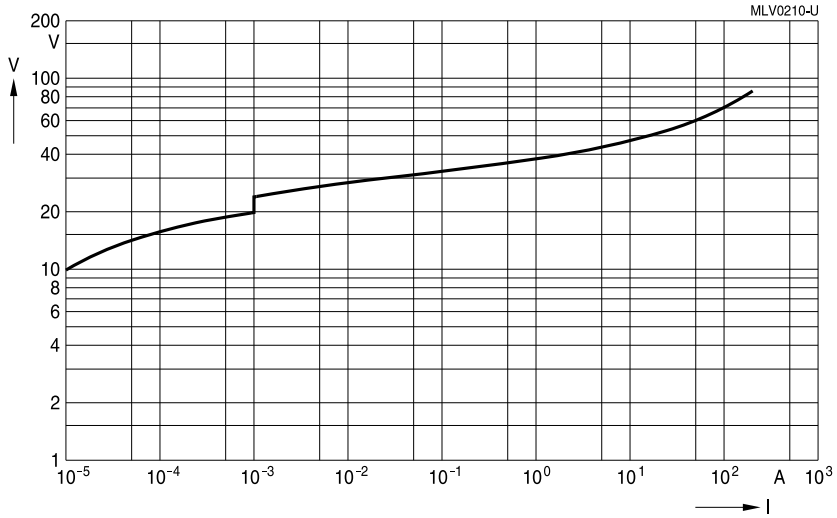

SR6K14*

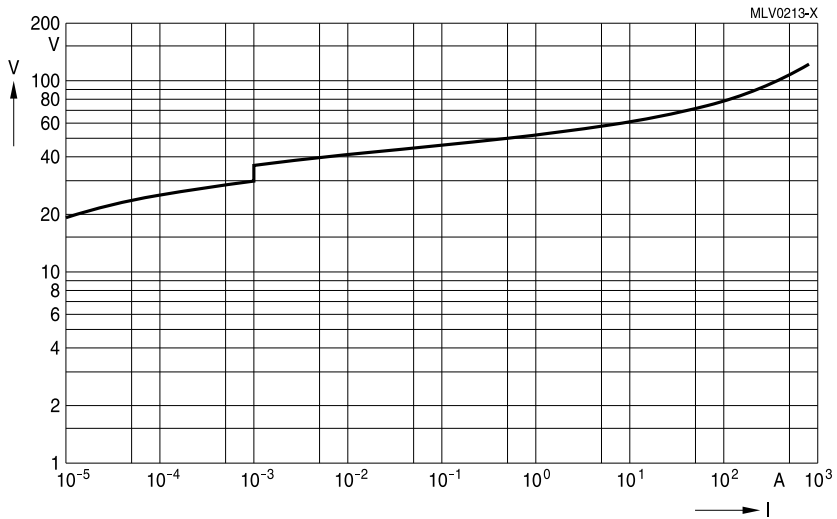


SR1K20*


Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

V/I characteristics

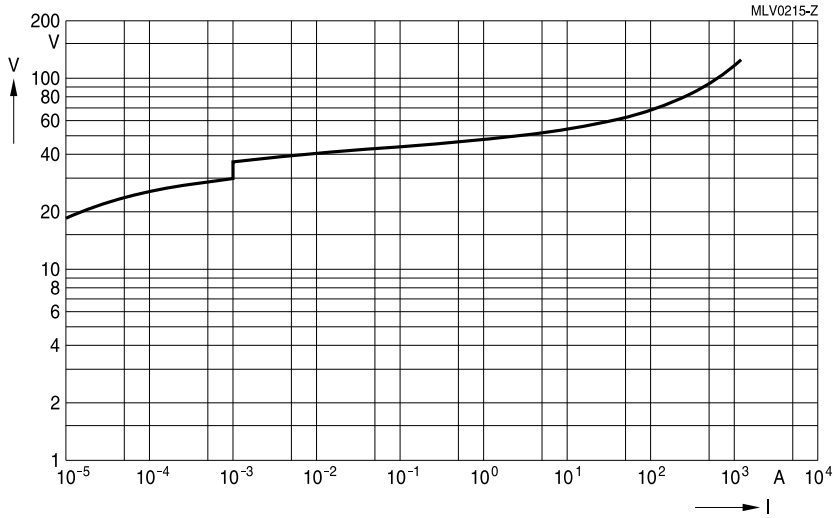

SR2K20*

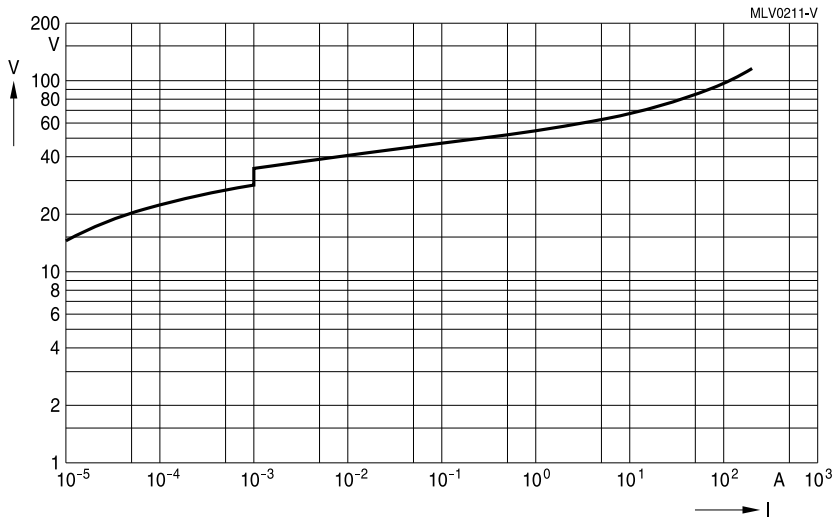


SR6K20*


Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

V/I characteristics

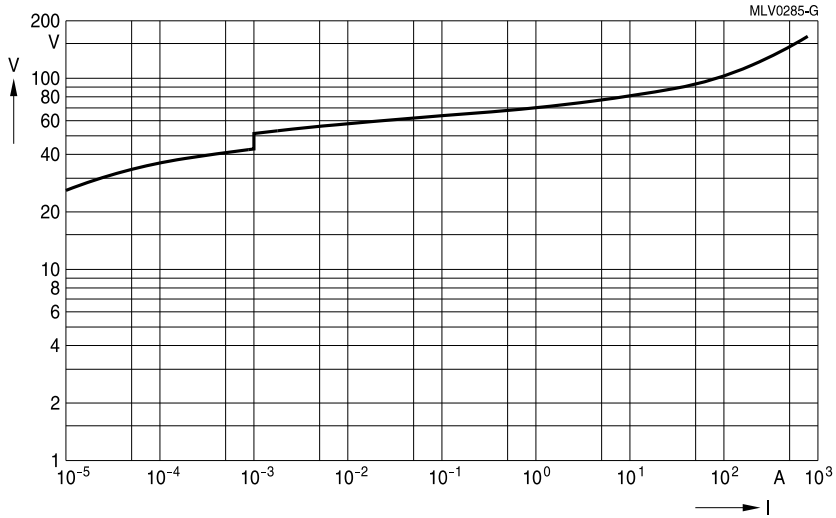

SR1K30*

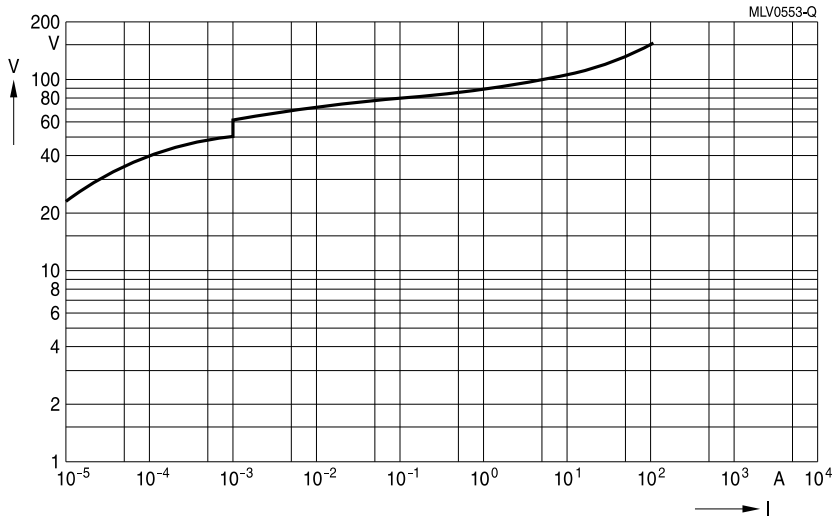

SR6K35*


Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series


Derating curves

Maximum surge current $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

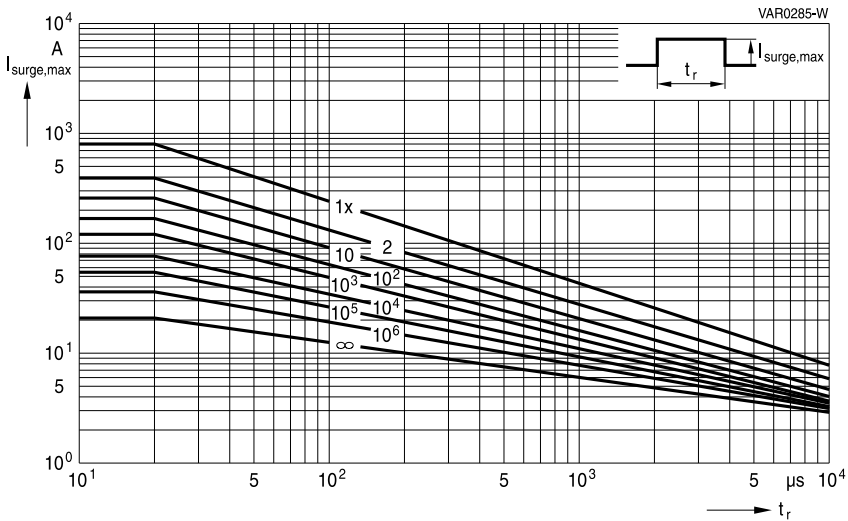

SHCV-SR1 ...

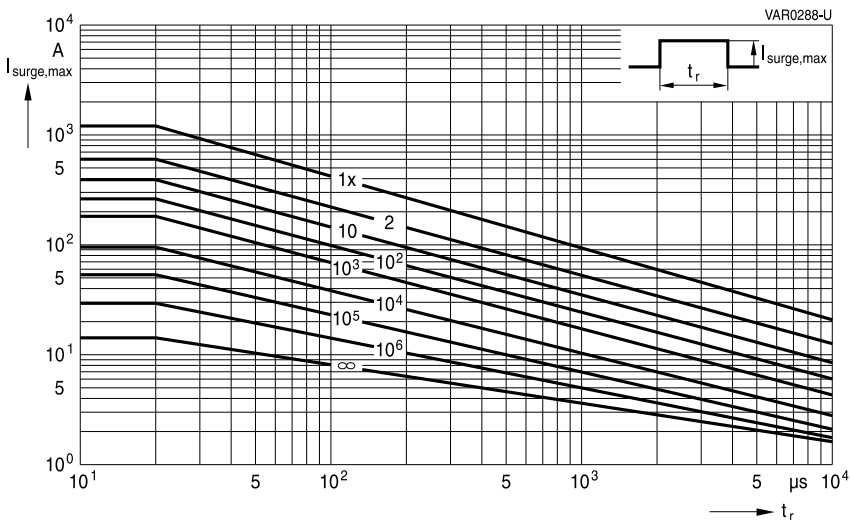

SHCV-SR2 ...


Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series


Derating curves

Maximum surge current $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

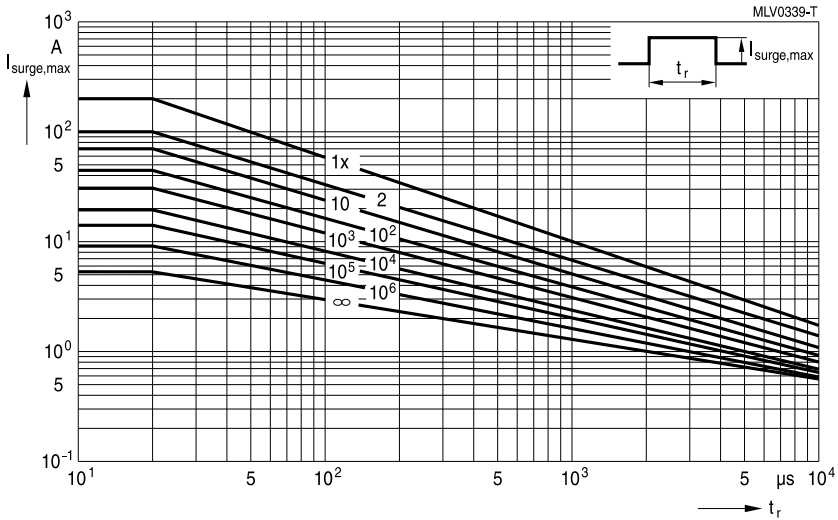

SR6K14, SR6K20

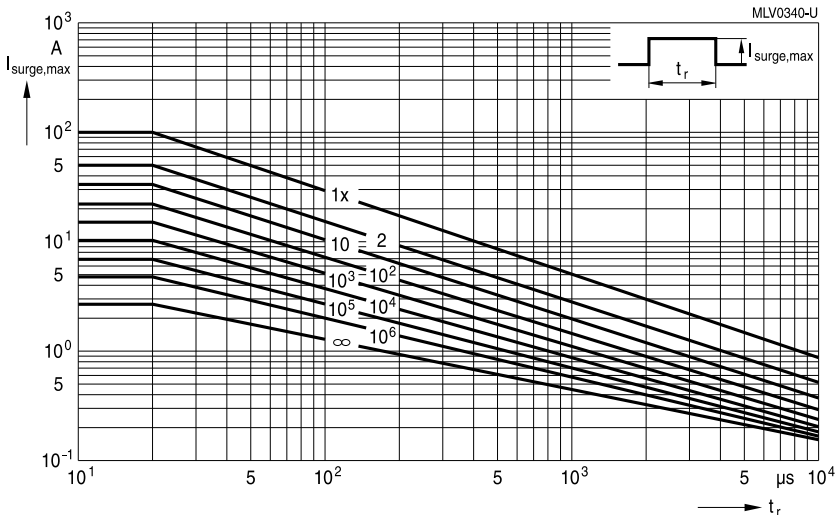

SR6K35 ...

Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

Symbols and terms

For ceramic transient voltage suppressors (CTVS)

| Symbol | Term |
|-------------------|--|
| $C_{line,max}$ | Maximum capacitance per line |
| $C_{line,min}$ | Minimum capacitance per line |
| $C_{line,typ}$ | Typical capacitance per line |
| C_{max} | Maximum capacitance |
| C_{min} | Minimum capacitance |
| C_{nom} | Nominal capacitance |
| ΔC_{nom} | Tolerance of nominal capacitance |
| C_{typ} | Typical capacitance |
| $f_{cut-off,max}$ | Maximum cut-off frequency |
| $f_{cut-off,min}$ | Minimum cut-off frequency |
| $f_{cut-off,typ}$ | Typical cut-off frequency |
| $f_{res,typ}$ | Typical resonance frequency |
| I | Current |
| I_{clamp} | Clamping current |
| I_{leak} | Leakage current |
| $I_{leak,max}$ | Maximum leakage current |
| $I_{leak,typ}$ | Typical leakage current |
| I_{PP} | Peak pulse current |
| $I_{surge,max}$ | Maximum surge current (also termed peak current) |
| LCT | Lower category temperature |
| L_{typ} | Typical inductance |
| $P_{diss,max}$ | Maximum power dissipation |
| P_{PP} | Peak pulse power |
| R_{ins} | Insulation resistance |
| R_{min} | Minimum resistance |
| R_S | Resistance per line |
| $R_{S,typ}$ | Typical resistance per line |
| T_A | Ambient temperature |
| T_{op} | Operating temperature |
| $T_{op,max}$ | Maximum operating temperature |
| T_{stg} | Storage temperature |

Leaded transient voltage/RFI suppressors (SHCVs)
SHCV series

| Symbol | Term |
|-------------------|--|
| t_r | Duration of equivalent rectangular wave |
| t_{resp} | Response time |
| $t_{resp,max}$ | Maximum response time |
| UCT | Upper category temperature |
| V | Voltage |
| $V_{BR,min}$ | Minimum breakdown voltage |
| $V_{clamp,max}$ | Maximum clamping voltage |
| $V_{DC,max}$ | Maximum DC operating voltage (also termed working voltage) |
| $V_{ESD,air}$ | Air discharge ESD capability |
| $V_{ESD,contact}$ | Contact discharge ESD capability |
| V_{jump} | Maximum jump-start voltage |
| $V_{RMS,max}$ | Maximum AC operating voltage, root-mean-square value |
| V_V | Varistor voltage (also termed breakdown voltage) |
| V_{LD} | Maximum load dump voltage |
| V_{leak} | Measurement voltage for leakage current |
| $V_{V,min}$ | Minimum varistor voltage |
| $V_{V,max}$ | Maximum varistor voltage |
| ΔV_V | Tolerance of varistor voltage |
| W_{LD} | Maximum load dump energy |
| W_{max} | Maximum energy absorption (also termed transient energy) |
| α_{typ} | Typical insertion loss |
| $\tan \delta$ | Dissipation factor |
| e | Lead spacing |
| $\ll * \gg$ | Maximum possible application conditions |

All dimensions are given in mm.

The commas used in numerical values denote decimal points.

Cautions and warnings

General

Some parts of this publication contain statements about the suitability of our ceramic transient voltage suppressor (CTVS) components (multilayer varistors (MLVs)), CeraDiodes, ESD/EMI filters, leaded transient voltage/ RFI suppressors (SHCV types)) for certain areas of application, including recommendations about incorporation/design-in of these products into customer applications. The statements are based on our knowledge of typical requirements often made of our CTVS devices in the particular areas. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our CTVS components for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always incumbent on the customer to check and decide whether the CTVS devices with the properties described in the product specification are suitable for use in a particular customer application.

- Do not use EPCOS CTVS components for purposes not identified in our specifications, application notes and data books.
- Ensure the suitability of a CTVS in particular by testing it for reliability during design-in. Always evaluate a CTVS component under worst-case conditions.
- Pay special attention to the reliability of CTVS devices intended for use in safety-critical applications (e.g. medical equipment, automotive, spacecraft, nuclear power plant).

Design notes

- Always connect a CTVS in parallel with the electronic circuit to be protected.
- Consider maximum rated power dissipation if a CTVS has insufficient time to cool down between a number of pulses occurring within a specified isolated time period. Ensure that electrical characteristics do not degrade.
- Consider derating at higher operating temperatures. Choose the highest voltage class compatible with derating at higher temperatures.
- Surge currents beyond specified values will puncture a CTVS. In extreme cases a CTVS will burst.
- If steep surge current edges are to be expected, make sure your design is as low-inductance as possible.
- In some cases the malfunctioning of passive electronic components or failure before the end of their service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In applications requiring a very high level of operational safety and especially when the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention, life-saving systems, or automotive battery line applications such as clamp 30), ensure by suitable design of the application or other measures (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of such a malfunction or failure. Only use CTVS components from the automotive series in safety-relevant applications.

Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

- Specified values only apply to CTVS components that have not been subject to prior electrical, mechanical or thermal damage. The use of CTVS devices in line-to-ground applications is therefore not advisable, and it is only allowed together with safety countermeasures like thermal fuses.

Storage

- Only store CTVS in their original packaging. Do not open the package prior to processing.
- Storage conditions in original packaging: temperature -25 to $+45^{\circ}\text{C}$, relative humidity $\leq 75\%$ annual average, maximum 95% , dew precipitation is inadmissible.
- Do not store CTVS devices where they are exposed to heat or direct sunlight. Otherwise the packaging material may be deformed or CTVS may stick together, causing problems during mounting.
- Avoid contamination of the CTVS surface during storage, handling and processing.
- Avoid storing CTVS devices in harmful environments where they are exposed to corrosive gases for example (SO_x , Cl).
- Use CTVS as soon as possible after opening factory seals such as polyvinyl-sealed packages.
- Solder CTVS components after shipment from EPCOS within the time specified:
 - CTVS with Ni barrier termination, 12 months
 - CTVS with AgPt termination, 6 months
 - SHCV, 24 months

Handling

- Do not drop CTVS components and allow them to be chipped.
- Do not touch CTVS with your bare hands - gloves are recommended.
- Avoid contamination of the CTVS surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

Mounting

- When CTVS devices are encapsulated with sealing material or overmolded with plastic material, electrical characteristics might be degraded and the life time reduced.
- Make sure an electrode is not scratched before, during or after the mounting process.
- Make sure contacts and housings used for assembly with CTVS components are clean before mounting.
- The surface temperature of an operating CTVS can be higher. Ensure that adjacent components are placed at a sufficient distance from a CTVS to allow proper cooling.
- Avoid contamination of the CTVS surface during processing.

Leaded transient voltage/RFI suppressors (SHCVs)

SHCV series

Soldering

- Complete removal of flux is recommended to avoid surface contamination that can result in an instable and/or high leakage current.
- Use resin-type or non-activated flux.
- Bear in mind that insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended, otherwise a component may crack.

Operation

- Use CTVS only within the specified operating temperature range.
- Use CTVS only within specified voltage and current ranges.
- Environmental conditions must not harm a CTVS. Only use them in normal atmospheric conditions. Reducing the atmosphere (e.g. hydrogen or nitrogen atmosphere) is prohibited.
- Prevent a CTVS from contacting liquids and solvents. Make sure that no water enters a CTVS (e.g. through plug terminals).
- Avoid dewing and condensation.
- EPCOS CTVS components are mainly designed for encased applications. Under all circumstances avoid exposure to:
 - direct sunlight
 - rain or condensation
 - steam, saline spray
 - corrosive gases
 - atmosphere with reduced oxygen content
- EPCOS CTVS devices are not suitable for switching applications or voltage stabilization where static power dissipation is required.

This listing does not claim to be complete, but merely reflects the experience of EPCOS AG.

Display of ordering codes for EPCOS products

The ordering code for one and the same EPCOS product can be represented differently in data sheets, data books, other publications, on the EPCOS website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under www.epcos.com/orderingcodes

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.

Important notes

7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard.** The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements (“CSR”) TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System.** For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2018-10

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Varistors category](#):

Click to view products by [TDK manufacturer](#):

Other Similar products are found below :

[R71ZOV151HC](#) [B72205S271K111](#) [B72214S251K151](#) [NTE1V020](#) [NTE1V130](#) [25FN511K](#) [S10K11G5S5](#) [ERZ-C14DK361U](#) [ERZ-C20DK221U](#) [207869-1](#) [AS-13](#) [B72540E 350K 62](#) [B72590D360A60](#) [B72650M301K93](#) [B72670M1140K72](#) [TVZ18EC271KBS](#) [TVZ20EB911KBS](#) [TVZ25D201KBS](#) [TVZ25D241KBS](#) [VDRH20X230BSE](#) [VZ07D220KBS](#) [VZ40D241KQ-N](#) [VZ40D241K](#) [VZ25D511KBS-N](#) [VZ20E511KBSX](#) [VZ20E221KBSX](#) [VZ10D471KBS-N](#) [20A9FN241K](#) [B72650M350K72](#) [TVZ25D301KBS](#) [TVZ20EC911KBS](#) [TVZ20EBN911KBS](#) [TVZ18EC471KBS](#) [B72220S350K101](#) [NTE1V030](#) [NTE1V275](#) [NTE2V015](#) [NTE2V035](#) [NTE2V115](#) [VZ20D391KBS-N](#) [VZ10D241KBS-N](#) [VZ07D390KBS-N](#) [VDRH14V060TSE](#) [VDRH20X300BKE](#) [V300LT4PX1841](#) [NTE1V017](#) [NTE1V115](#) [NTE1V150](#) [NTE1V300](#) [NTE2V025](#)