

High-performance 6-Axis SmartIndustrial™ MotionTracking

MEMS Device for Industrial Applications

GENERAL DESCRIPTION

The IIM-42653 is a 6-axis SmartIndustrial™ MotionTracking device that supports an extended operating temperature range.

The IIM-42653 combines a 3-axis gyroscope, and a 3-axis accelerometer in a small 2.5 mm x 3 mm x 0.91 mm (14-pin LGA) package. It also features a 2 KB FIFO that can lower the traffic on the serial bus interface and reduce power consumption by allowing the system processor to burst read sensor data and then go into a low-power mode.

IIM-42653 supports highly accurate external clock input to reduce system level sensitivity error, improve orientation measurement from gyroscope data and to reduce ODR sensitivity to temperature and device to device variation.

The host interface can be configured to support I²CSM slave, I²C slave, or SPI slave modes. The I²CSM interface supports speeds up to 12.5 MHz (data rates up to 12.5 Mbps in SDR mode, 25 Mbps in DDR mode), the I²C interface supports speeds up to 1 MHz, and the SPI interface supports speeds up to 24 MHz.

The device features an operating voltage range from 3.6V down to 1.71V.

ORDERING INFORMATION

PART NUMBER	TEMPERATURE	PACKAGE
IIM-42653†	-40°C to +105°C	14-pin LGA

†Denotes RoHS and Green-compliant package

APPLICATIONS

- Navigation
- Orientation measurement
- Tilt sensing
- Platform stabilization
- Robotic

FEATURES


- Digital-output X, Y, and Z-axis angular rate sensors (gyroscopes) with programmable full-scale range of ±31.25, ±62.5, ±125, ±250, ±500, ±1000, ±2000 and ±4000 degrees/sec

LONGEVITY COMMITMENT

To provide the best service for customers developing products with a long-life cycle we have designed and engineered products with longevity in mind. These products are designed for harsher environments and are tested and manufactured to higher accuracy and stability. <https://invensense.tdk.com/longevity/>

- Digital-output X-, Y-, and Z-axis accelerometer with programmable full-scale range of ±4g, ±8g, ±16g and ±32g
- User-programmable interrupts
- I²CSM / I²C / SPI slave host interface
- Digital-output temperature sensor
- Small and thin package: 2.5 mm x 3 mm x 0.91 mm (14-pin LGA)
- 20,000 g shock tolerant
- MEMS structure hermetically sealed and bonded at wafer level
- RoHS and Green compliant

TYPICAL OPERATING CIRCUIT

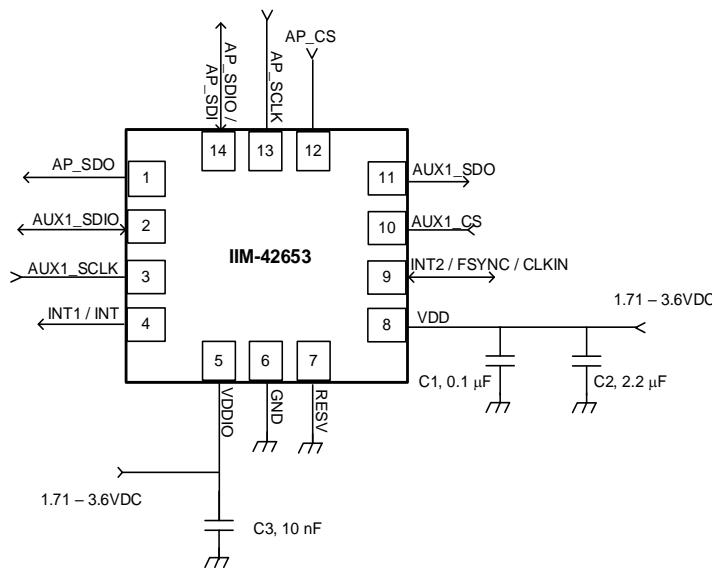

Application Schematic (SPI Interface to Host)



TABLE OF CONTENTS

GENERAL DESCRIPTION	1
ORDERING INFORMATION	1
APPLICATIONS	1
FEATURES	1
TYPICAL OPERATING CIRCUIT	1
1 INTRODUCTION	9
1.1 PURPOSE AND SCOPE	9
1.2 PRODUCT OVERVIEW.....	9
1.3 APPLICATIONS.....	9
2 FEATURES.....	10
2.1 GYROSCOPE FEATURES.....	10
2.2 ACCELEROMETER FEATURES.....	10
2.3 MOTION FEATURES.....	10
2.4 ADDITIONAL FEATURES	10
3 ELECTRICAL CHARACTERISTICS	11
3.1 GYROSCOPE SPECIFICATIONS.....	11
3.2 ACCELEROMETER SPECIFICATIONS	12
3.3 ELECTRICAL SPECIFICATIONS.....	13
3.3.1 <i>D.C. Electrical Characteristics.</i>	13
3.3.2 <i>A.C. Electrical Characteristics.</i>	14
3.4 I ² C TIMING CHARACTERIZATION	15
3.5 SPI TIMING CHARACTERIZATION – 4-WIRE SPI MODE	16
3.6 SPI TIMING CHARACTERIZATION – 3-WIRE SPI MODE	17
3.7 RTC (CLKIN) TIMING CHARACTERIZATION	18
3.8 ABSOLUTE MAXIMUM RATINGS.....	19
4 APPLICATIONS INFORMATION	20
4.1 PIN OUT DIAGRAM AND SIGNAL DESCRIPTION.....	20
4.2 TYPICAL OPERATING CIRCUIT	21
4.3 BILL OF MATERIALS FOR EXTERNAL COMPONENTS.....	22
4.4 SYSTEM BLOCK DIAGRAM.....	22
4.5 OVERVIEW	23
4.6 THREE-AXIS MEMS GYROSCOPE WITH 16-BIT ADCS AND SIGNAL CONDITIONING.....	23
4.7 THREE-AXIS MEMS ACCELEROMETER WITH 16-BIT ADCS AND SIGNAL CONDITIONING.....	23
4.8 I ³ C SM , I ² C, AND SPI HOST INTERFACE.....	23
4.9 SELF-TEST	23
4.10 CLOCKING	24
4.11 SENSOR DATA REGISTERS	24
4.12 INTERRUPTS.....	24
4.13 DIGITAL-OUTPUT TEMPERATURE SENSOR.....	24
4.14 BIAS AND LDOs	25
4.15 CHARGE PUMP.....	25
4.16 STANDARD POWER MODES	25
5 SIGNAL PATH.....	26
5.1 SUMMARY OF PARAMETERS USED TO CONFIGURE THE SIGNAL PATH	26
5.2 NOTCH FILTER.....	26

5.2.1	Frequency of Notch Filter (each axis).....	27
5.2.2	Bandwidth of Notch Filter (common to all axes)	27
5.3	ANTI-ALIAS FILTER.....	29
5.4	USER PROGRAMMABLE OFFSET	31
5.5	UI FILTER BLOCK	31
5.5.1	1 st Order Filter 3dB Bandwidth, Noise Bandwidth (NBW), Group Delay.....	32
5.5.2	2 nd Order Filter 3dB Bandwidth, Noise Bandwidth (NBW), Group Delay	34
5.5.3	3 rd Order Filter 3dB Bandwidth, Noise Bandwidth (NBW), Group Delay.....	35
5.6	ODR AND FSR SELECTION	37
6	FIFO.....	39
6.1	PACKET STRUCTURE	39
6.2	FIFO HEADER	41
6.3	MAXIMUM FIFO STORAGE.....	42
6.4	FIFO CONFIGURATION REGISTERS.....	42
7	PROGRAMMABLE INTERRUPTS	44
8	APEX MOTION FUNCTIONS	45
8.1	APEX ODR SUPPORT.....	45
8.2	DMP POWER SAVE MODE.....	46
8.3	PEDOMETER PROGRAMMING.....	46
8.4	TILT DETECTION PROGRAMMING	47
8.5	FREEFALL DETECTION PROGRAMMING	48
8.6	TAP DETECTION PROGRAMMING	49
8.7	WAKE ON MOTION PROGRAMMING.....	49
8.8	SIGNIFICANT MOTION DETECTION PROGRAMMING	50
9	DIGITAL INTERFACE	52
9.1	I ³ C SM , I ² C, AND SPI SERIAL INTERFACES.....	52
9.2	I3C SM INTERFACE	52
9.3	I ² C INTERFACE.....	52
9.4	I ² C COMMUNICATIONS PROTOCOL.....	52
9.5	I ² C TERMS.....	55
9.6	SPI INTERFACE	55
10	ASSEMBLY	57
10.1	ORIENTATION OF AXES.....	57
10.2	PACKAGE DIMENSIONS	58
11	PART NUMBER PACKAGE MARKING	60
12	USE NOTES	61
12.1	ACCELEROMETER MODE TRANSITIONS	61
12.2	ACCELEROMETER LOW POWER (LP) MODE AVERAGING FILTER SETTING.....	61
12.3	SETTINGS FOR I ² C, I3C SM , AND SPI OPERATION	61
12.4	NOTCH FILTER AND ANTI-ALIAS FILTER OPERATION.....	61
12.5	EXTERNAL CLOCK INPUT EFFECT ON ODR.....	61
12.6	INT_ASYNC_RESET CONFIGURATION	62
12.7	FIFO TIMESTAMP INTERVAL SCALING	62
12.8	SUPPLEMENTARY INFORMATION FOR FIFO_HOLD_LAST_DATA_EN	62
12.9	REGISTER VALUES MODIFICATION	64
13	REGISTER MAP	65

13.1	USER BANK 0 REGISTER MAP.....	65
13.2	USER BANK 1 REGISTER MAP.....	66
13.3	USER BANK 2 REGISTER MAP.....	67
13.4	USER BANK 3 REGISTER MAP.....	68
13.5	USER BANK 4 REGISTER MAP.....	68
14	USER BANK 0 REGISTER MAP – DESCRIPTIONS	70
14.1	S4S_ST.....	70
14.2	S4S_DT	70
14.3	DEVICE_CONFIG.....	70
14.4	DRIVE_CONFIG.....	71
14.5	INT_CONFIG	71
14.6	FIFO_CONFIG	72
14.7	TEMP_DATA1_UI	72
14.8	TEMP_DATA0_UI	72
14.9	ACCEL_DATA_X1_UI	73
14.10	ACCEL_DATA_X0_UI	73
14.11	ACCEL_DATA_Y1_UI.....	73
14.12	ACCEL_DATA_Y0_UI.....	73
14.13	ACCEL_DATA_Z1_UI.....	73
14.14	ACCEL_DATA_Z0_UI.....	74
14.15	GYRO_DATA_X1_UI	74
14.16	GYRO_DATA_X0_UI	74
14.17	GYRO_DATA_Y1_UI	74
14.18	GYRO_DATA_Y0_UI	74
14.19	GYRO_DATA_Z1_UI.....	75
14.20	GYRO_DATA_Z0_UI.....	75
14.21	TMST_FSYNCH	75
14.22	TMST_FSYNCL	75
14.23	INT_STATUS	76
14.24	FIFO_COUNTH.....	76
14.25	FIFO_COUNTL	76
14.26	FIFO_DATA.....	77
14.27	APEX_DATA0.....	77
14.28	APEX_DATA1.....	77
14.29	APEX_DATA2.....	77
14.30	APEX_DATA3.....	78
14.31	APEX_DATA4.....	78
14.32	APEX_DATA5.....	78
14.33	INT_STATUS2	79
14.34	INT_STATUS3	79
14.35	SIGNAL_PATH_RESET	80
14.36	INTF_CONFIG0	80
14.37	INTF_CONFIG1	82
14.38	PWR_MGMT0	82
14.39	GYRO_CONFIG0	83
14.40	ACCEL_CONFIG0	84
14.41	GYRO_CONFIG1	85
14.42	GYRO_ACCEL_CONFIG0	86
14.43	ACCEL_CONFIG1	87
14.44	TMST_CONFIG	87
14.45	APEX_CONFIG0	88
14.46	SMD_CONFIG	88

14.47	FIFO_CONFIG1	89
14.48	FIFO_CONFIG2	89
14.49	FIFO_CONFIG3	89
14.50	FSYNC_CONFIG	90
14.51	INT_CONFIG0	90
14.52	INT_CONFIG1	91
14.53	INT_SOURCE0	91
14.54	INT_SOURCE1	92
14.55	INT_SOURCE2	92
14.56	INT_SOURCE3	93
14.57	INT_SOURCE4	93
14.58	INT_SOURCE5	94
14.59	FIFO_LOST_PKT0	94
14.60	FIFO_LOST_PKT1	94
14.61	SELF_TEST_CONFIG	95
14.62	WHO_AM_I	95
14.63	REG_BANK_SEL	96
15	USER BANK 1 REGISTER MAP – DESCRIPTIONS	97
15.1	SENSOR_CONFIG0	97
15.2	GYRO_CONFIG_STATIC2	97
15.3	GYRO_CONFIG_STATIC3	98
15.4	GYRO_CONFIG_STATIC4	98
15.5	GYRO_CONFIG_STATIC5	98
15.6	GYRO_CONFIG_STATIC6	98
15.7	GYRO_CONFIG_STATIC7	99
15.8	GYRO_CONFIG_STATIC8	99
15.9	GYRO_CONFIG_STATIC9	99
15.10	GYRO_CONFIG_STATIC10	100
15.11	XG_ST_DATA	100
15.12	YG_ST_DATA	100
15.13	ZG_ST_DATA	100
15.14	TMSTVAL0	101
15.15	TMSTVAL1	101
15.16	TMSTVAL2	101
15.17	INTF_CONFIG4	102
15.18	INTF_CONFIG5	102
15.19	INTF_CONFIG6	103
16	USER BANK 2 REGISTER MAP – DESCRIPTIONS	104
16.1	ACCEL_CONFIG_STATIC2	104
16.2	ACCEL_CONFIG_STATIC3	104
16.3	ACCEL_CONFIG_STATIC4	104
16.4	XA_ST_DATA	104
16.5	YA_ST_DATA	105
16.6	ZA_ST_DATA	105
16.7	AUX1_CONFIG1	105
16.8	AUX1_CONFIG2	106
16.9	AUX1_CONFIG3	106
16.10	TEMP_DATA1_AUX1	107
16.11	TEMP_DATA0_AUX1	107
16.12	ACCEL_DATA_X1_AUX1	107
16.13	ACCEL_DATA_X0_AUX1	107

16.14	ACCEL_DATA_Y1_AUX1	107
16.15	ACCEL_DATA_Y0_AUX1	108
16.16	ACCEL_DATA_Z1_AUX1	108
16.17	ACCEL_DATA_Z0_AUX1	108
16.18	GYRO_DATA_X1_AUX1	108
16.19	GYRO_DATA_X0_AUX1	108
16.20	GYRO_DATA_Y1_AUX1	109
16.21	GYRO_DATA_Y0_AUX1	109
16.22	GYRO_DATA_Z1_AUX1	109
16.23	GYRO_DATA_Z0_AUX1	109
16.24	TMSTVAL0_AUX1	110
16.25	TMSTVAL1_AUX1	110
16.26	INT_STATUS_AUX1	110
16.27	AUX1_SPI_REG1	110
16.28	AUX1_SPI_REG2	111
16.29	AUX1_SPI_REG3	111
17	USER BANK 3 REGISTER MAP – DESCRIPTIONS	112
17.1	S4S_CONFIG	112
17.2	S4S_GYRO_TPH1	112
17.3	S4S_GYRO_TPH2	113
17.4	S4S_ACCEL_TPH1	113
17.5	S4S_ACCEL_TPH2	113
17.6	S4S_RR	113
18	USER BANK 4 REGISTER MAP – DESCRIPTIONS	114
18.1	FDR_CONFIG	114
18.2	APEX_CONFIG1	114
18.3	APEX_CONFIG2	115
18.4	APEX_CONFIG3	115
18.5	APEX_CONFIG4	116
18.6	APEX_CONFIG5	117
18.7	APEX_CONFIG6	118
18.8	APEX_CONFIG7	119
18.9	APEX_CONFIG8	119
18.10	APEX_CONFIG9	119
18.11	APEX_CONFIG10	120
18.12	ACCEL_WOM_X_THR	120
18.13	ACCEL_WOM_Y_THR	121
18.14	ACCEL_WOM_Z_THR	121
18.15	INT_SOURCE6	121
18.16	INT_SOURCE7	122
18.17	INT_SOURCE8	122
18.18	INT_SOURCE9	123
18.19	INT_SOURCE10	123
18.20	INTF_CONFIG10	124
18.21	INTF_COMM_ERR	124
18.22	OFFSET_USER0	125
18.23	OFFSET_USER1	125
18.24	OFFSET_USER2	125
18.25	OFFSET_USER3	125
18.26	OFFSET_USER4	126
18.27	OFFSET_USER5	126

18.28	OFFSET_USER6.....	126
18.29	OFFSET_USER7.....	126
18.30	OFFSET_USER8.....	127
19	REFERENCE	128
20	SMARTINDUSTRIAL FAMILY.....	129
21	REVISION HISTORY	130

TABLE OF FIGURES

Figure 1. I ² C Bus Timing Diagram	15
Figure 2. 4-Wire SPI Bus Timing Diagram	16
Figure 3. 3-Wire SPI Bus Timing Diagram	17
Figure 4. RTC Timing Diagram.....	18
Figure 5. Pin Out Diagram for IIM-42653 2.5x3.0x0.91 mm LGA	20
Figure 6. IIM-42653 Application Schematic (I ³ C SM / I ² C Interface to Host & SPI-4 Interface for AUX1).....	21
Figure 7. IIM-42653 Application Schematic (SPI Interface to Host & SPI-4 Interface for AUX1).....	21
Figure 8. IIM-42653 System Block Diagram.....	22
Figure 9. IIM-42653 Signal Path.....	26
Figure 10. FIFO Packet Structure	39
Figure 11. Maximum FIFO Storage	42
Figure 12. START and STOP Conditions	53
Figure 13. Complete I ² C Data Transfer	53
Figure 14. Typical SPI Master/Slave Configuration.....	56
Figure 15. Orientation of Axes of Sensitivity and Polarity of Rotation	57
Figure 16. Package Dimensions	58
Figure 17. Part Number Package Marking	60

TABLE OF TABLES

Table 1. Gyroscope Specifications	11
Table 2. Accelerometer Specifications	12
Table 3. D.C. Electrical Characteristics.....	13
Table 4. A.C. Electrical Characteristics.....	14
Table 5. I ² C Timing Characteristics.....	15
Table 6. 4-Wire SPI Timing Characteristics (24-MHz Operation).....	16
Table 7. 3-Wire SPI Timing Characteristics (24-MHz Operation).....	17
Table 8. RTC Timing Characteristics.....	18
Table 9. Absolute Maximum Ratings	19
Table 10. Signal Descriptions	20
Table 11. Bill of Materials	22
Table 12. Standard Power Modes for IIM-42653	25
Table 13. Signal path parameters	26
Table 14. I ² C Terms	55

1 INTRODUCTION

1.1 PURPOSE AND SCOPE

This document is a product specification, providing a description, specifications, and design related information on the IIM-42653 SmartIndustrial™ device. The device is housed in a small 2.5 mm x 3 mm x 0.91 mm 14-pin LGA package.

1.2 PRODUCT OVERVIEW

The IIM-42653 is a 6-axis MotionTracking device that combines a 3-axis gyroscope, and a 3-axis accelerometer in a small 2.5 mm x 3 mm x 0.91 mm (14-pin LGA) package. It also features a 2 KB FIFO that can lower the traffic on the serial bus interface and reduce power consumption by allowing the system processor to burst read sensor data and then go into a low-power mode. IIM-42653, with its 6-axis integration, enables manufacturers to eliminate the costly and complex selection, qualification, and system level integration of discrete devices, guaranteeing optimal motion performance for customers.

The gyroscope supports eight programmable full-scale range settings from ± 31.25 dps to ± 4000 dps, and the accelerometer supports four programmable full-scale range settings from $\pm 4g$ to $\pm 32g$. IIM-42653 also supports external clock input for highly accurate 31 kHz to 50 kHz clocks to reduce system level sensitivity error and reduce ODR sensitivity to temperature and device to device variation.

Other industry-leading features include on-chip 16-bit ADCs, programmable digital filters, an embedded temperature sensor, and programmable interrupts. The device features I³CSM, I²C, and SPI serial interfaces; a VDD operating range of 1.71V to 3.6V; and a separate VDDIO operating range of 1.71V to 3.6V.

The host interface can be configured to support I³CSM slave, I²C slave, or SPI slave modes. The I³CSM interface supports speeds up to 12.5 MHz (data rates up to 12.5 Mbps in SDR mode, 25 Mbps in DDR mode), the I²C interface supports speeds up to 1 MHz, and the SPI interface supports speeds up to 24 MHz.

IIM-42653 also supports external clock input for highly accurate 31 kHz to 50 kHz clocks to reduce system level sensitivity error, improve orientation measurement from gyroscope data, and reduce ODR sensitivity to temperature and device to device variation.

By leveraging its patented and volume-proven CMOS-MEMS fabrication platform, which integrates MEMS wafers with companion CMOS electronics through wafer-level bonding, InvenSense has driven the package size down to a footprint and thickness of 2.5 mm x 3 mm x 0.91 mm (14-pin LGA), to provide a very small yet high performance low cost package. The device provides high robustness by supporting 20,000g shock reliability.

1.3 APPLICATIONS

- Navigation
- Orientation measurement
- Tilt sensing
- Platform stabilization
- Robotics

2 FEATURES

2.1 GYROSCOPE FEATURES

The triple-axis MEMS gyroscope in the IIM-42653 includes a wide range of features:

- Digital-output X-, Y-, and Z-axis angular rate sensors (gyroscopes) with programmable full-scale range of ± 31.25 , ± 62.5 , ± 125 , ± 250 , ± 500 , ± 1000 , ± 2000 and ± 4000 degrees/sec
- Low Noise (LN) power mode support
- Digitally-programmable low-pass filters
- Factory calibrated sensitivity scale factor
- Self-test

2.2 ACCELEROMETER FEATURES

The triple-axis MEMS accelerometer in IIM-42653 includes a wide range of features:

- Digital-output X, Y, and Z-axis accelerometer with programmable full-scale range of $\pm 4g$, $\pm 8g$, $\pm 16g$ and $\pm 32g$
- Low Noise (LN) and Low Power (LP) power modes support
- User-programmable interrupts
- Wake-on-motion interrupt for low power operation of applications processor
- Self-test

2.3 MOTION FEATURES

IIM-42653 includes the following motion features, also known as APEX (Advanced Pedometer and Event Detection – neXt gen)

- Pedometer: tracks step count, also issues step detect interrupt
- Tilt Detection: issues an interrupt when the tilt angle exceeds 35° for more than a programmable time
- Tap Detection: issues an interrupt when a tap is detected, along with the tap count
- Freefall Detection: triggers an interrupt when device freefall is detected and outputs freefall duration
- Wake on Motion: detects motion when accelerometer data exceeds a programmable threshold
- Significant Motion Detection: detects significant motion if wake on motion events are detected during a programmable time window

2.4 ADDITIONAL FEATURES

IIM-42653 includes the following additional features:

- External clock input supports highly accurate clock input from 31 kHz to 50 kHz, helps to reduce system level sensitivity error
- 2 KB FIFO buffer enables the applications processor to read the data in bursts
- User-programmable digital filters for gyroscope, accelerometer, and temperature sensor
- User configurable internal pull-up/pull-downs included on I/O interfaces to reduce system costs associated with external pull-ups/pull-downs
- 12.5 MHz I²CSM (data rates up to 12.5 Mbps in SDR mode, 25Mbps in DDR mode) / 1 MHz I²C / 24 MHz SPI slave host interface
- Digital-output temperature sensor
- Smallest and thinnest LGA package for Industrial IoT applications: 2.5 mm x 3 mm x 0.91 mm (14-pin LGA)
- 20,000g shock tolerant
- MEMS structure hermetically sealed and bonded at wafer level
- RoHS and Green compliant

3 ELECTRICAL CHARACTERISTICS

3.1 GYROSCOPE SPECIFICATIONS

Typical Operating Circuit of section 4.2, VDD = 1.8 V, VDDIO = 1.8V, TA=25°C, unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
GYROSCOPE SENSITIVITY						
Full-Scale Range	GYRO_UI_FS_SEL =0; GYRO_AUX1_FS_SEL =0		±4000		°/s	2
	GYRO_UI_FS_SEL =1; GYRO_AUX1_FS_SEL =1		±2000		°/s	2
	GYRO_UI_FS_SEL =2; GYRO_AUX1_FS_SEL =2		±100		°/s	2
	GYRO_UI_FS_SEL =3; GYRO_AUX1_FS_SEL =3		±500		°/s	2
	GYRO_UI_FS_SEL =4; GYRO_AUX1_FS_SEL =4		±250		°/s	2
	GYRO_UI_FS_SEL =5; GYRO_AUX1_FS_SEL =5		±125		°/s	2
	GYRO_UI_FS_SEL =6; GYRO_AUX1_FS_SEL =6		±62.5		°/s	2
	GYRO_UI_FS_SEL =7; GYRO_AUX1_FS_SEL =7		±31.25		°/s	2
Gyroscope ADC Word Length	Output in two's complement format		16		bits	2
Sensitivity Scale Factor	GYRO_UI_FS_SEL =0; GYRO_AUX1_FS_SEL =0		8.2		LSB/(°/s)	2
	GYRO_UI_FS_SEL =1; GYRO_AUX1_FS_SEL =1		16.4		LSB/(°/s)	2
	GYRO_UI_FS_SEL =2; GYRO_AUX1_FS_SEL =2		32.8		LSB/(°/s)	2
	GYRO_UI_FS_SEL =3; GYRO_AUX1_FS_SEL =3		65.5		LSB/(°/s)	2
	GYRO_UI_FS_SEL =4; GYRO_AUX1_FS_SEL =4		131		LSB/(°/s)	2
	GYRO_UI_FS_SEL =5; GYRO_AUX1_FS_SEL =5		262		LSB/(°/s)	2
	GYRO_UI_FS_SEL =6; GYRO_AUX1_FS_SEL =6		524.3		LSB/(°/s)	2
	GYRO_UI_FS_SEL =7; GYRO_AUX1_FS_SEL =7		1048.6		LSB/(°/s)	2
Sensitivity Scale Factor Initial Tolerance	Component & Board-level, 25°C		±0.5		%	1
Sensitivity Scale Factor Variation Over Temperature	-40°C to +105°C		±0.005		%/°C	3
Nonlinearity	Best fit straight line; 25°C		±0.1		%	3
Cross-Axis Sensitivity	Board-level		±1.25		%	3
ZERO-RATE OUTPUT (ZRO)						
Initial ZRO Tolerance	Board-level, 25°C		±0.5		°/s	3
ZRO Variation vs. Temperature	-40°C to +105°C		±0.04		°/s/°C	3
OTHER PARAMETERS						
Rate Noise Spectral Density	@ 10 Hz		0.005		°/s /√Hz	1
Total RMS Noise	Bandwidth = 100 Hz		0.05		°/s-rms	4
Gyroscope Mechanical Frequencies		25	27	29	KHz	1
Low Pass Filter Response	ODR < 1kHz	5		500	Hz	2
	ODR ≥ 1kHz	42		3979	Hz	2
Gyroscope Start-Up Time	Time from gyro enable to gyro drive ready		30		ms	3
Output Data Rate		12.5		32000	Hz	2

Table 1. Gyroscope Specifications

Notes:

1. Tested in production.
2. Guaranteed by design.
3. Derived from validation or characterization of parts, not tested in production.
4. Calculated from Rate Noise Spectral Density.

3.2 ACCELEROMETER SPECIFICATIONS

Typical Operating Circuit of section 4.2, VDD = 1.8 V, VDDIO = 1.8V, TA=25°C, unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
ACCELEROMETER SENSITIVITY						
Full-Scale Range	ACCEL_UI_FS_SEL =0; ACCEL_AUX1_FS_SEL =0		±32		g	2
	ACCEL_UI_FS_SEL =1; ACCEL_AUX1_FS_SEL =1		±16		g	2
	ACCEL_UI_FS_SEL =2; ACCEL_AUX1_FS_SEL =2		±8		g	2
	ACCEL_UI_FS_SEL =3; ACCEL_AUX1_FS_SEL =3		±4		g	2
ADC Word Length	Output in two's complement format		16		bits	2
Sensitivity Scale Factor	ACCEL_UI_FS_SEL =0; ACCEL_AUX1_FS_SEL =0		1,024		LSB/g	2
	ACCEL_UI_FS_SEL =1; ACCEL_AUX1_FS_SEL =1		2,048		LSB/g	2
	ACCEL_UI_FS_SEL =2; ACCEL_AUX1_FS_SEL =2		4,096		LSB/g	2
	ACCEL_UI_FS_SEL =3; ACCEL_AUX1_FS_SEL =3		8,192		LSB/g	2
Sensitivity Scale Factor Initial Tolerance	Component & Board-level, 25°C		±0.5		%	1
Sensitivity Change vs. Temperature	-40°C to +105°C		±0.005		%/°C	3
Nonlinearity	Best Fit Straight Line, ±2g		±0.1		%	3
Cross-Axis Sensitivity	Board-level		±1		%	3
ZERO-G OUTPUT						
Initial Tolerance	Board-level, all axes		±20		mg	3
Zero-G Level Change vs. Temperature	-40°C to +105°C		±0.15		mg/°C	3
OTHER PARAMETERS						
Power Spectral Density	@ 10 Hz	X and Y-axis		65		µg/VHz
		Z-axis		70		µg/VHz
RMS Noise	Bandwidth = 100 Hz	X and Y-axis		0.65		mg-rms
		Z-axis		0.70		mg-rms
Low-Pass Filter Response	ODR < 1kHz		5	500	Hz	2
	ODR ≥ 1kHz		42	3979	Hz	2
Accelerometer Startup Time	From sleep mode to valid data		10		ms	3
Output Data Rate			1.5625	32000	Hz	2

Table 2. Accelerometer Specifications

Notes:

1. Tested in production.
2. Guaranteed by design.
3. Derived from validation or characterization of parts, not tested in production.
4. Calculated from Power Spectral Density.

3.3 ELECTRICAL SPECIFICATIONS

3.3.1 D.C. Electrical Characteristics

Typical Operating Circuit of section 4.2, VDD = 1.8V, VDDIO = 1.8V, TA=25°C, unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
SUPPLY VOLTAGES						
VDD		1.71	1.8	3.6	V	1
VDDIO		1.71	1.8	3.6	V	1
SUPPLY CURRENTS						
Low-Noise Mode	6-Axis Gyroscope + Accelerometer		0.88		mA	2
	3-Axis Accelerometer		0.28		mA	2
	3-Axis Gyroscope		0.73		mA	2
Full-Chip Sleep Mode	At 25°C		7.5		µA	2
TEMPERATURE RANGE						
Specified Temperature Range	Performance parameters are not applicable beyond Specified Temperature Range	-40		+105	°C	2

Table 3. D.C. Electrical Characteristics

Notes:

1. Guaranteed by design.
2. Derived from validation or characterization of parts, not tested in production.

3.3.2 A.C. Electrical Characteristics

Typical Operating Circuit of section 4.2, VDD = 1.8V, VDDIO = 1.8V, TA=25°C, unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
SUPPLIES						
Supply Ramp Time	Monotonic ramp. Ramp rate is 10% to 90% of the final value	0.01		3	ms	1
Power Supply Noise	Up to 10 kHz		10		mV peak-peak	1
TEMPERATURE SENSOR						
Operating Range	Ambient	-40		105	°C	2
25°C Output			0		LSB	3
ADC Resolution			16		bits	2
ODR	With Filter	25		8000	Hz	2
Room Temperature Offset	25°C	-5		5	°C	3
Stabilization Time				14000	μs	2
Sensitivity	Untrimmed		132.48		LSB/°C	1
Sensitivity for FIFO data			2.07		LSB/°C	1
POWER-ON RESET						
Start-up time for register read/write	From power-up			1	ms	1
I²C ADDRESS						
I ² C ADDRESS	AP_ADO = 0 AP_ADO = 1		1101000 1101001			
DIGITAL INPUTS (FSYNC, SCLK, SDI, CS)						
V _{IH} , High Level Input Voltage		0.7*VDDIO			V	1
V _{IL} , Low Level Input Voltage				0.3*VDDIO	V	
C _i , Input Capacitance		< 10			pF	
Input Leakage Current		100			nA	
DIGITAL OUTPUT (SDO, INT1, INT2)						
V _{OH} , High Level Output Voltage	R _{LOAD} =1 MΩ;	0.9*VDDIO			V	1
V _{OL1} , LOW-Level Output Voltage	R _{LOAD} =1 MΩ;			0.1*VDDIO	V	
V _{OLINT} , INT Low-Level Output Voltage	OPEN=1, 0.3 mA sink Current			0.1	V	
Output Leakage Current	OPEN=1		100		nA	
t _{INT} , INT Pulse Width	int_tpulse_duration= 0, 1 (100us, 8us) ;	8		100	μs	
I²C I/O (SCL, SDA)						
V _{IL} , LOW-Level Input Voltage		-0.5 V		0.3*VDDIO	V	1
V _{IH} , HIGH-Level Input Voltage		0.7*VDDIO		VDDIO + 0.5V	V	
V _{hys} , Hysteresis			0.1*VDDIO		V	
V _{OL} , LOW-Level Output Voltage	3 mA sink current	0		0.4	V	
I _{OL} , LOW-Level Output Current	V _{OL} =0.4V V _{OL} =0.6V		3 6		mA mA	
Output Leakage Current			100		nA	
t _{of} , Output Fall Time from V _{IHmax} to V _{ILmax}	C _b bus capacitance in pF	20+0.1C _b		300	ns	
INTERNAL CLOCK SOURCE						
Clock Frequency Initial Tolerance	CLKSEL='2b00 or gyro inactive; 25°C	-3		+3	%	1
	CLK_SEL='2b01 and gyro active; 25°C	-1.5		+1.5	%	1
Frequency Variation over Temperature	CLK_SEL='2b00 or gyro inactive; -40°C to +85°C			±3	%	1
	CLK_SEL='2b01 and gyro active; -40°C to +85°C			±2	%	1

Table 4. A.C. Electrical Characteristics

Notes:

1. Expected results based on design, will be updated after characterization. Not tested in production.
2. Guaranteed by design.
3. Production tested.

3.4 I²C TIMING CHARACTERIZATION

Typical Operating Circuit of section 4.2, VDD = 1.8V, VDDIO = 1.8V, T_A=25°C, unless otherwise noted.

Parameters	Conditions	Min	Typical	Max	Units	Notes
I²C TIMING	I²C FAST-MODE PLUS					
f _{SCL} , SCL Clock Frequency				1	MHz	1
t _{HD,STA} , (Repeated) START Condition Hold Time		0.26			μs	1
t _{LOW} , SCL Low Period		0.5			μs	1
t _{HIGH} , SCL High Period		0.26			μs	1
t _{SU,STA} , Repeated START Condition Setup Time		0.26			μs	1
t _{HD,DAT} , SDA Data Hold Time		0			μs	1
t _{SU,DAT} , SDA Data Setup Time		50			ns	1
t _r , SDA and SCL Rise Time	C _b bus cap. from 10 to 400 pF			120	ns	1
t _f , SDA and SCL Fall Time	C _b bus cap. from 10 to 400 pF			120	ns	1
t _{SU,STO} , STOP Condition Setup Time		0.5			μs	1
t _{BUF} , Bus Free Time Between STOP and START Condition		0.5			μs	1
C _b , Capacitive Load for each Bus Line		< 400			pF	1
t _{VD,DAT} , Data Valid Time				0.45	μs	1
t _{VD,ACK} , Data Valid Acknowledge Time				0.45	μs	1

Table 5. I²C Timing Characteristics

Notes:

1. Based on characterization of 5 parts over temperature and voltage as mounted on evaluation board or in sockets

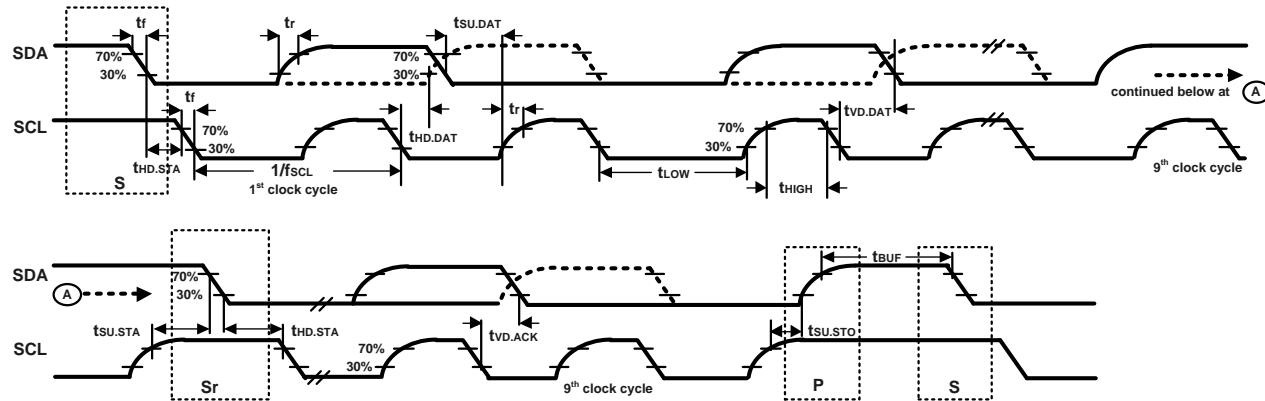


Figure 1. I²C Bus Timing Diagram

3.5 SPI TIMING CHARACTERIZATION – 4-WIRE SPI MODE

Typical Operating Circuit of section 4.2, VDD = 1.8V, VDDIO = 1.8V, TA=25°C, unless otherwise noted.

PARAMETERS	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
SPI TIMING						
fSPC, SCLK Clock Frequency	Default			24	MHz	1
t _{LOW} , SCLK Low Period		17			ns	1
t _{HIGH} , SCLK High Period		17			ns	1
t _{SU,CS} , CS Setup Time		39			ns	1
t _{HD,CS} , CS Hold Time		18			ns	1
t _{SU,SDI} , SDI Setup Time		13			ns	1
t _{HD,SDI} , SDI Hold Time		8			ns	1
t _{VD,SDO} , SDO Valid Time	C _{load} = 20 pF			21.5	ns	1
t _{HD,SDO} , SDO Hold Time	C _{load} = 20 pF	3.5			ns	1
t _{DIS,SDO} , SDO Output Disable Time				28	ns	1

Table 6. 4-Wire SPI Timing Characteristics (24-MHz Operation)

Notes:

1. Based on characterization of 5 parts over temperature and voltage as mounted on evaluation board or in sockets

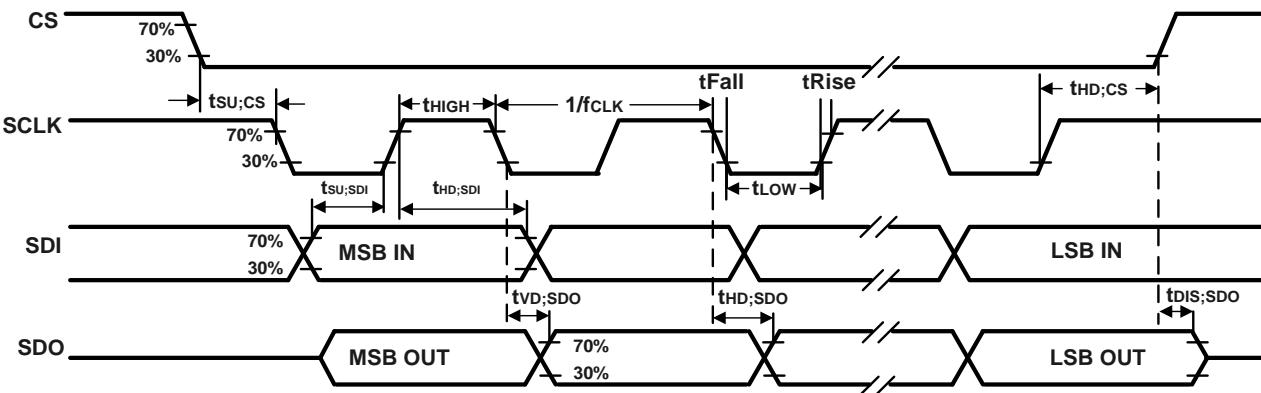


Figure 2. 4-Wire SPI Bus Timing Diagram

3.6 SPI TIMING CHARACTERIZATION – 3-WIRE SPI MODE

Typical Operating Circuit of section 4.2, VDD = 1.8 V, VDDIO = 1.8V, TA=25°C, unless otherwise noted.

PARAMETERS	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
SPI TIMING						
f _{SPC} , SCLK Clock Frequency	Default			24	MHz	1
t _{LOW} , SCLK Low Period		17			ns	1
t _{HIGH} , SCLK High Period		17			ns	1
t _{su,CS} , CS Setup Time		39			ns	1
t _{HD,CS} , CS Hold Time		5			ns	1
t _{su,SDIO} , SDIO Input Setup Time		13			ns	1
t _{HD,SDIO} , SDIO Input Hold Time		8			ns	1
t _{VD,SDIO} , SDIO Output Valid Time	C _{load} = 20 pF			18.5	ns	1
t _{HD,SDIO} , SDIO Output Hold Time	C _{load} = 20 pF	3.5			ns	1
t _{DIS,SDIO} , SDIO Output Disable Time				28	ns	1

Table 7. 3-Wire SPI Timing Characteristics (24-MHz Operation)

Notes:

- Based on characterization of 5 parts over temperature and voltage as mounted on evaluation board or in sockets

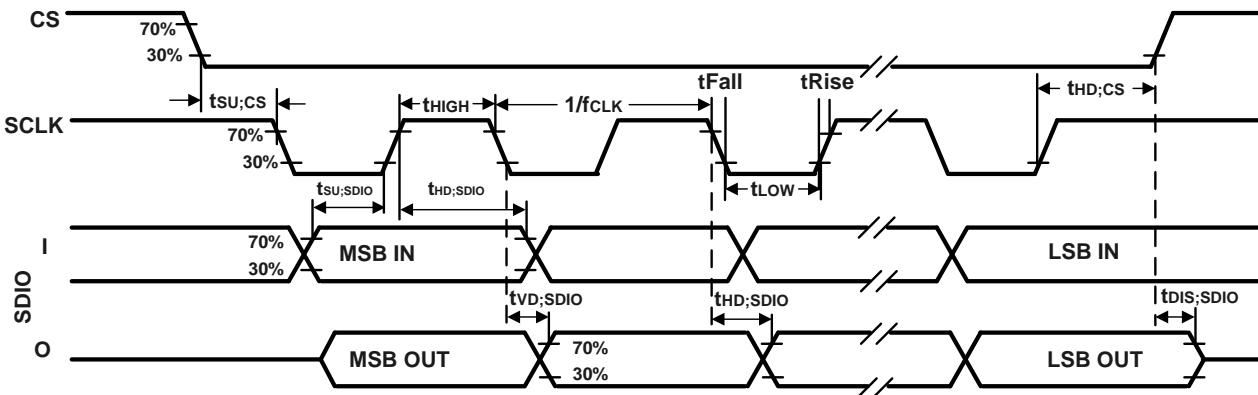


Figure 3. 3-Wire SPI Bus Timing Diagram

3.7 RTC (CLKIN) TIMING CHARACTERIZATION

Typical Operating Circuit of section 4.2, VDD = 1.8V, VDDIO = 1.8V, TA=25°C, unless otherwise noted.

PARAMETERS	CONDITIONS	MIN	TYP	MAX	UNITS	NOTES
RTC (CLKIN) TIMING						
F _{RTC} , RTC Clock Frequency	Default	31	32	50	kHz	1
t _{HIGHRTC} , RTC Clock High Period		1			μs	1
t _{RISERTC} , RTC Clock Rise Time		5		500	ns	1
t _{FALLRTC} , RTC Clock Fall Time		5		500	ns	1

Table 8. RTC Timing Characteristics

Notes:

1. Based on characterization. Not tested in production.

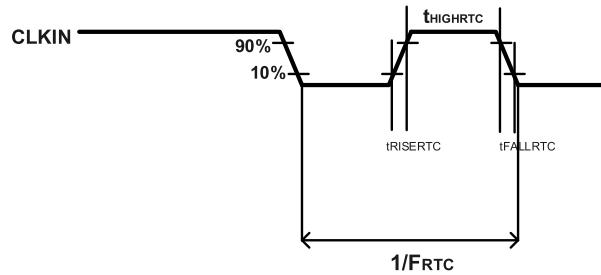


Figure 4. RTC Timing Diagram

3.8 ABSOLUTE MAXIMUM RATINGS

Stress above those listed as “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these conditions is not implied. Exposure to the absolute maximum ratings conditions for extended periods may affect device reliability. Prolonged exposure to acceleration ranges beyond $\pm 60\text{g}$ may affect device reliability.

PARAMETER	RATING
Supply Voltage, VDD	-0.5V to +4V
Supply Voltage, VDDIO	-0.5V to +4V
Input Voltage Level (FSYNC, SCL, SDA)	-0.5V to VDDIO + 0.5V
Acceleration (Any Axis, unpowered)	20,000g for 0.2 ms
Operating Temperature Range	-40°C to +105°C
Storage Temperature Range	-40°C to +125°C
Electrostatic Discharge (ESD) Protection	2 kV (HBM); 500V (CDM)
Latch-up	JEDEC Class II (2), 125°C $\pm 100\text{ mA}$

Table 9. Absolute Maximum Ratings

4 APPLICATIONS INFORMATION

4.1 PIN OUT DIAGRAM AND SIGNAL DESCRIPTION

Pin Number	Pin Name	Pin Description
1	AP_SDO / AP_ADO	AP_SDO: AP SPI serial data output (4-wire mode); AP_ADO: AP I ² C SM / I ² C slave address LSB
2	AUX1_SDIO	AUX1_SDIO: AUX1 SPI serial data IO (3-wire mode);
3	AUX1_SCLK	AUX1_SCLK: AUX1 SPI serial clock
4	INT1 / INT	INT1: Interrupt 1 (Note: INT1 can be push-pull or open drain) INT: All interrupts mapped to pin 4
5	VDDIO	IO power supply voltage
6	GND	Power supply ground
7	RESV	Connect to GND
8	VDD	Power supply voltage
9	INT2 / FSYNC / CLKIN	INT2: Interrupt 2 (Note: INT2 can be push-pull or open drain) FSYNC: Frame sync input; Connect to GND if FSYNC not used CLKIN: External clock input
10	AUX1_CS	AUX1 SPI chip select
11	AUX1_SDO	AUX1 SPI serial data output (4-wire mode);
12	AP_CS	AP SPI Chip select (AP SPI interface); Connect to VDDIO if using AP I ² C SM / I ² C interface
13	AP_SCL / AP_SCLK	AP_SCL: AP I ² C SM / I ² C serial clock; AP_SCLK: AP SPI serial clock
14	AP_SDA / AP_SDIO / AP_SDI	AP_SDA: AP I ² C SM / I ² C serial data; AP_SDIO: AP SPI serial data I/O (3-wire mode); AP_SDI: AP SPI serial data input (4-wire mode)

Table 10. Signal Descriptions

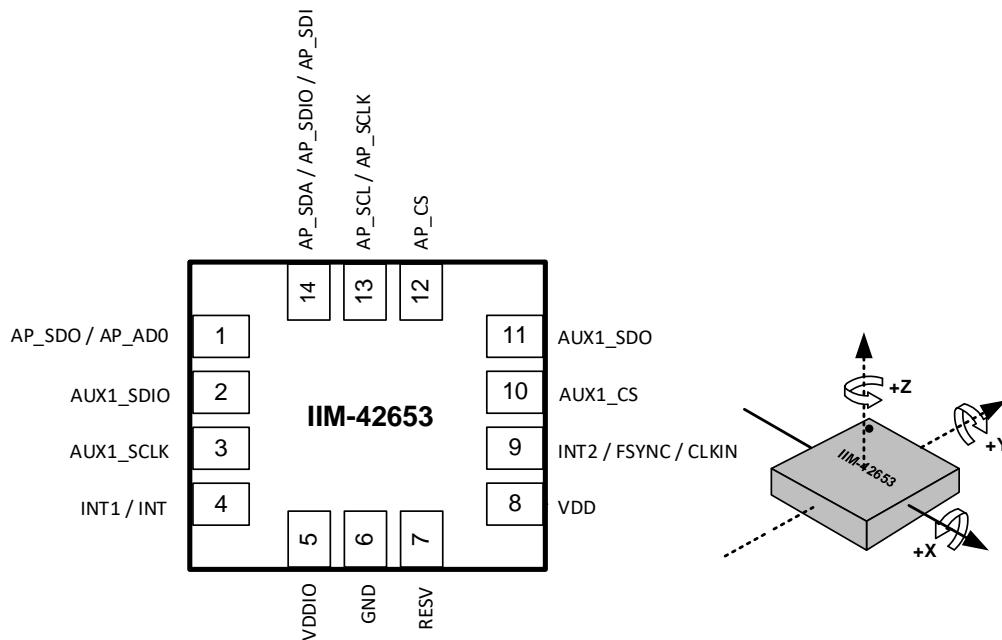


Figure 5. Pin Out Diagram for IIM-42653 2.5x3.0x0.91 mm LGA

4.2 TYPICAL OPERATING CIRCUIT

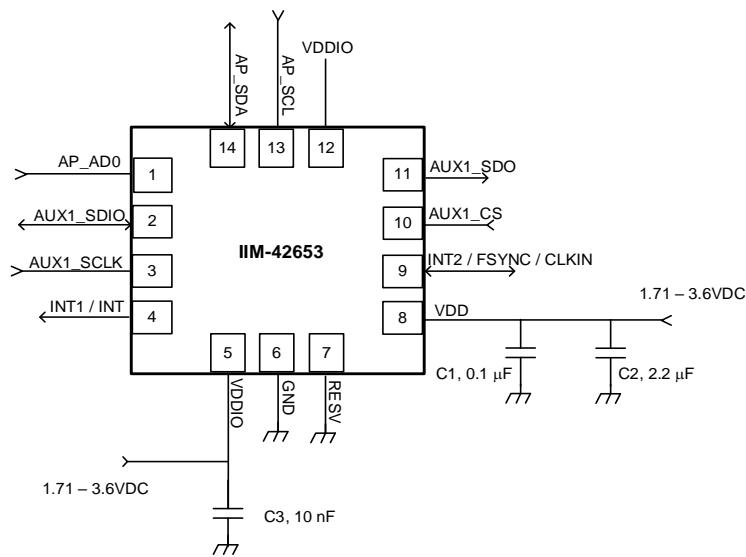


Figure 6. IIM-42653 Application Schematic (I²CSM / I²C Interface to Host & SPI-4 Interface for AUX1)

Note: I²C lines are open drain and pull-up resistors (e.g. 10 kΩ) are required.

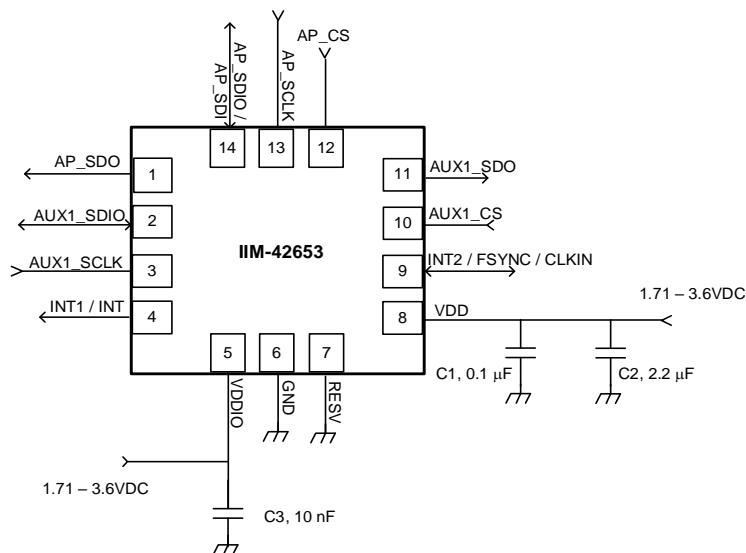


Figure 7. IIM-42653 Application Schematic (SPI Interface to Host & SPI-4 Interface for AUX1)

4.3 BILL OF MATERIALS FOR EXTERNAL COMPONENTS

COMPONENT	LABEL	SPECIFICATION	QUANTITY
VDD Bypass Capacitors	C1	X7R, 0.1 μ F \pm 10%	1
	C2	X7R, 2.2 μ F \pm 10%	1
VDDIO Bypass Capacitor	C3	X7R, 10nF \pm 10%	1

Table 11. Bill of Materials

4.4 SYSTEM BLOCK DIAGRAM




Figure 8. IIM-42653 System Block Diagram

Note: The above block diagram is an example. Please refer to the pin-out (section [Error! Reference source not found.](#)) for other configuration options.

4.5 OVERVIEW

The IIM-42653 is comprised of the following key blocks and functions:

- Three-axis MEMS rate gyroscope sensor with 16-bit ADCs and signal conditioning
 - 20-bits data format support in FIFO for high-data resolution (see section 6 for details)
- Three-axis MEMS accelerometer sensor with 16-bit ADCs and signal conditioning
 - 20-bits data format support in FIFO for high-data resolution (see section 6 for details)
- I³CSM, I²C, and SPI serial communications interfaces to Host
- Self-Test
- Clocking
- Sensor Data Registers
- FIFO
- Interrupts
- Digital-Output Temperature Sensor
- Bias and LDOs
- Charge Pump
- Standard Power Modes

4.6 THREE-AXIS MEMS GYROSCOPE WITH 16-BIT ADCS AND SIGNAL CONDITIONING

The IIM-42653 includes a vibratory MEMS rate gyroscope, which detects rotation about the X-, Y-, and Z- Axes. When the gyroscope is rotated about any of the sense axes, the Coriolis Effect causes a vibration that is detected by a capacitive pickoff. The resulting signal is amplified, demodulated, and filtered to produce a voltage that is proportional to the angular rate. This voltage is digitized using on-chip Analog-to-Digital Converters (ADCs) to sample each axis. The full-scale range of the gyro sensors may be digitally programmed to ± 31.25 , ± 62.5 , ± 125 , ± 250 , ± 500 , ± 1000 , ± 2000 and ± 4000 degrees per second (dps).

4.7 THREE-AXIS MEMS ACCELEROMETER WITH 16-BIT ADCS AND SIGNAL CONDITIONING

The IIM-42653 includes a 3-Axis MEMS accelerometer. Acceleration along a particular axis induces displacement of a proof mass in the MEMS structure, and capacitive sensors detect the displacement. The IIM-42653 architecture reduces the accelerometers' susceptibility to fabrication variations as well as to thermal drift. When the device is placed on a flat surface, it will measure 0g on the X- and Y-axes and +1g on the Z-axis. The accelerometers' scale factor is calibrated at the factory and is nominally independent of supply voltage. The full-scale range of the digital output can be adjusted to $\pm 4g$, $\pm 8g$, $\pm 16g$ and $\pm 32g$.

4.8 I³CSM, I²C, AND SPI HOST INTERFACE

The IIM-42653 communicates to the application processor using an I³CSM, I²C, or SPI serial interface. The IIM-42653 always acts as a slave when communicating to the application processor.

4.9 SELF-TEST

Self-test allows for the testing of the mechanical and electrical portions of the sensors. The self-test for each measurement axis can be activated by means of the gyroscope and accelerometer self-test registers.

When the self-test is activated, the electronics cause the sensors to be actuated and produce an output signal. The output signal is used to observe the self-test response.

The self-test response is defined as follows:

$$\text{SELF-TEST RESPONSE} = \text{SENSOR OUTPUT WITH SELF-TEST ENABLED} - \text{SENSOR OUTPUT WITH SELF-TEST DISABLED}$$

When the value of the self-test response is within the specified min/max limits of the product specification, the part has passed self-test. When the self-test response exceeds the min/max values, the part is deemed to have failed self-test.

4.10 CLOCKING

The IIM-42653 has a flexible clocking scheme, allowing the following internal clock sources to be used for the internal synchronous circuitry. This synchronous circuitry includes signal conditioning, ADCs, and various control circuits and registers.

The CLKIN pin on IIM-42653 provides the ability to input an external clock. A highly accurate external clock may be used rather than the internal clock sources if greater clock accuracy is desired. External clock input supports highly accurate clock input from 31 kHz to 50 kHz, resulting in improvement of the following:

- ODR uncertainty due to process, temperature, operating mode (PLL vs. RCOSC), and design limitations. This uncertainty can be as high as $\pm 8\%$ in RCOSC mode and $\pm 1\%$ in PLL mode. The CLKIN, assuming a 50 ppm or better 32.768 kHz source, will improve the ODR accuracy from $\pm 80,000$ ppm to ± 50 ppm in RCOSC mode, or from $\pm 10,000$ ppm to ± 50 ppm in PLL mode.
- System level sensitivity error. Any clock uncertainty directly impacts gyroscope sensitivity at the system level. Sophisticated systems can estimate ODR inaccuracy to some extent, but not to the extent improved by using CLKIN.
- System-level clock/sensor synchronization. When using CLKIN, the accelerometer and gyroscope are on the same clock as the host. There is no need to continually re-synchronize the sensor data as the sensor sample points and period are in exact alignment with the common system clock.
- Other applications that benefit from CLKIN include navigation, robotics.

Allowable internal sources for generating the internal clock are:

- a) An internal relaxation oscillator
- b) Auto-select between internal relaxation oscillator and gyroscope MEMS oscillator to use the best available source

The only setting supporting specified performance in all modes is option b). Option b) is recommended when using the internal clock source.

4.11 SENSOR DATA REGISTERS

The sensor data registers contain the latest gyroscope, accelerometer, and temperature measurement data. They are read-only registers and are accessed via the serial interface. Data from these registers may be read anytime.

4.12 INTERRUPTS

Interrupt functionality is configured via the Interrupt Configuration register. Items that are configurable include the interrupt pins configuration, the interrupt latching and clearing method, and triggers for the interrupt. Items that can trigger an interrupt are (1) clock generator locked to new reference oscillator (used when switching clock sources); (2) new data is available to be read (from the FIFO and Data registers); (3) accelerometer event interrupts; (4) FIFO watermark; (5) FIFO overflow. The interrupt status can be read from the Interrupt Status register.

4.13 DIGITAL-OUTPUT TEMPERATURE SENSOR

An on-chip temperature sensor and ADC are used to measure the IIM-42653 die temperature. The readings from the ADC can be read from the FIFO or the Sensor Data registers.

Temperature data value from the sensor data registers can be converted to degrees centigrade by using the following formula:

$$\text{Temperature in Degrees Centigrade} = (\text{TEMP_DATA} / 132.48) + 25$$

FIFO_TEMP_DATA, temperature data stored in FIFO, can be 8-bit or 16-bit quantity. The 8-bit of temperature data stored in FIFO is limited to -40°C to 85°C range, while the 16-bit representation can support the full operating temperature range. It can be converted to degrees centigrade by using the following formula:

$$\text{Temperature in Degrees Centigrade} = (\text{FIFO_TEMP_DATA} / 2.07) + 25$$

4.14 BIAS AND LDOS

The bias and LDO section generate the internal supply and the reference voltages and currents required by the IIM-42653.

4.15 CHARGE PUMP

An on-chip charge pump generates the high voltage required for the MEMS oscillator.

4.16 STANDARD POWER MODES

Table 12 lists the user-accessible power modes for IIM-42653.

MODE	NAME	GYRO	ACCEL
1	Sleep Mode	Off	Off
2	Standby Mode	Drive On	Off
3	Accelerometer Low-Power Mode	Off	Duty-Cycled
4	Accelerometer Low-Noise Mode	Off	On
5	Gyroscope Low-Noise Mode	On	Off
6	6-Axis Low-Noise Mode	On	On

Table 12. Standard Power Modes for IIM-42653

5 SIGNAL PATH

The following figure shows a block diagram of the signal path for IIM-42653.

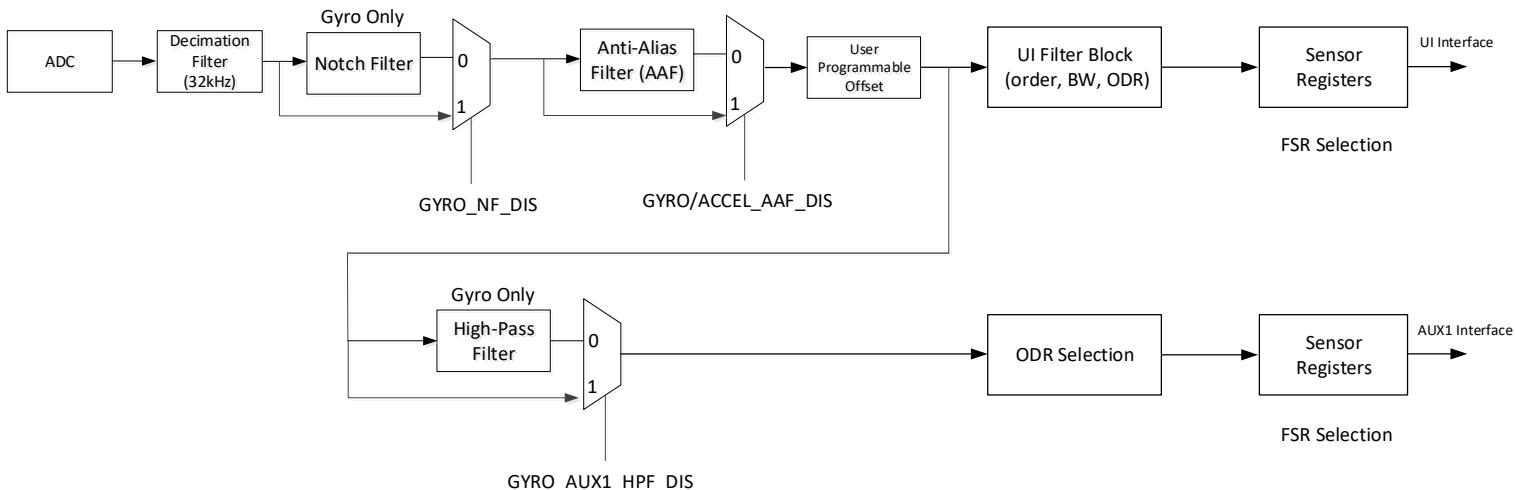


Figure 9. IIM-42653 Signal Path

The signal path starts with ADCs for the gyroscope and accelerometer. Other components of the signal path are described in section 5.1 in further detail.

5.1 SUMMARY OF PARAMETERS USED TO CONFIGURE THE SIGNAL PATH

Table 13 shows the parameters that can control the signal path.

PARAMETER NAME	DESCRIPTION
GYRO_AAF_DIS	Disables the Gyroscope Anti Alias Filter (AAF)
GYRO_AAF_DELT GYRO_AAF_DELTSQR GYRO_AAF_BITSHIFT	Three parameters required to program the gyroscope AAF. This is a 2 nd order filter with programmable low pass filter. This is a user programmable filter which can be used to select the desired BW. This filter allows trading off RMS noise vs. latency for a given ODR.
ACCEL_AAF_DIS	Disables the Accelerometer Anti Alias Filter
ACCEL_AAF_DELT ACCEL_AAF_DELTSQR ACCEL_AAF_BITSHIFT	Three parameters required to program the accelerometer AAF. This is a 2 nd order filter with programmable low pass filter. This is a user programmable filter which can be used to select the desired BW. This filter allows trading off RMS noise vs. latency for a given ODR.
GYRO_NF_DIS	Disables the gyro Notch Filter
GYRO_X/Y/Z_NF_COSWZ GYRO_X/Y/Z_NF_COSWZ_SEL	Factory trimmed parameters, designed to position a Notch at or near the sense peak frequency of Gyro. This allows the user to suppress only sense peak contribution to noise, while still maintaining a low latency high BW/ODR interface from the Sensor. This filter is available only in gyro, and the parameters for X, Y, and Z are chosen independently.
GYRO_NF_BW_SEL	Factory trimmed parameter to cancel noise created by sense peak from gyro. This parameter is common to all three axes

Table 13. Signal path parameters

5.2 NOTCH FILTER

The Notch Filter is only supported for the gyroscope signal path. The following steps can be used to program the notch filter. Note that the notch filter is specific to each axis in the gyroscope, so the X-, Y-, and Z-axis can be programmed independently.

5.2.1 Frequency of Notch Filter (each axis)

To operate the Notch filter, two parameters NF_COSWZ, and NF_COSWZ_SEL must be programmed for each gyroscope axis.

Parameters NF_COSWZ are defined for each axis of the gyroscope as GYRO_X_NF_COSWZ (register bank 1, register 0x0Fh & register 0x12h), GYRO_Y_NF_COSWZ (register bank 1, register 0x10h & register 0x12h), GYRO_Z_NF_COSWZ (register bank 1, register 0x11h & register 0x12h). Note that the parameters have 9-bit values across two different registers.

Parameters NF_COSWZ_SEL are defined for each axis of the gyroscope as GYRO_X_NF_COSWZ_SEL (register bank 1, register 0x12h, bit 3), GYRO_Y_NF_COSWZ_SEL (register bank 1, register 0x12h, bit 4), GYRO_Z_NF_COSWZ_SEL (register bank 1, register 0x12h, bit 5).

Each value must be calculated using the steps described below and programmed into the corresponding register locations mentioned above.

fdesired is the desired frequency of the Notch Filter in kHz. The lower bound for fdesired is 1 kHz, and the upper bound is 3 kHz. Operating the notch filter outside this range is not supported.

Step1: COSWZ = $\cos(2\pi f_{\text{desired}}/8)$

Step2:

```

If abs(COSWZ)≤0.875
    NF_COSWZ = round[COSWZ*256]
    NF_COSWZ_SEL = 0
else
    NF_COSWZ_SEL = 1
    if COSWZ > 0.875
        NF_COSWZ = round [8*(1-COSWZ)*256]
    else if COSWZ < -0.875
        NF_COSWZ = round [-8*(1+COSWZ)*256]
    end
End

```

5.2.2 Bandwidth of Notch Filter (common to all axes)

The notch filter allows the user to control the width of the notch from eight possible values using a 3-bit parameter GYRO_NF_BW_SEL in register bank 1, register 0x13h, bits 6:4. This parameter is common to all three axes.

GYRO_NF_BW_SEL	NOTCH FILTER BANDWIDTH (HZ)
0	1449
1	680
2	329
3	162
4	80
5	40
6	20
7	10

The notch filter can be selected or bypassed by using the parameter GYRO_NF_DIS in register bank 1, register 0x0Bh, bit 0 as shown below.

GYRO_NF_DIS	FUNCTION
0	Enable notch filter
1	Disable notch filter

5.3 ANTI-ALIAS FILTER

To program the anti-alias filter for a required bandwidth, use the table below to map the bandwidth to register values as shown:

- Register bank 2, register 0x03h, bits 6:1, ACCEL_AAF_DELT: Code from 1 to 63 that allows programming the bandwidth for accelerometer anti-alias filter
- Register bank 2, register 0x04h, bits 7:0 and Bank 2, register 0x05h, bits 3:0, ACCEL_AAF_DELTSQR: Square of the delt value for accelerometer
- Register bank 2, register 0x05h, bits 7:4, ACCEL_AAF_BITSHIFT: Bitshift value for accelerometer used in hardware implementation
- Register bank 1, register 0x0Ch, bits 5:0, GYRO_AAF_DELT: Code from 1 to 63 that allows programming the bandwidth for gyroscope anti-alias filter
- Register bank 1, register 0x0Dh, bits 7:0 and Bank 1, register 0x0Eh, bits 3:0, GYRO_AAF_DELTSQR: Square of the delt value for gyroscope
- Register bank 1, register 0x0Eh, bits 7:4, GYRO_AAF_BITSHIFT: Bitshift value for gyroscope used in hardware implementation

3DB BANDWIDTH (HZ)	ACCEL_AAF_DELT; GYRO_AAF_DELT	ACCEL_AAF_DELTSQR; GYRO_AAF_DELTSQR	ACCEL_AAF_BITSHIFT; GYRO_AAF_BITSHIFT
42	1	1	15
84	2	4	13
126	3	9	12
170	4	16	11
213	5	25	10
258	6	36	10
303	7	49	9
348	8	64	9
394	9	81	9
441	10	100	8
488	11	122	8
536	12	144	8
585	13	170	8
634	14	196	7
684	15	224	7
734	16	256	7
785	17	288	7
837	18	324	7
890	19	360	6
943	20	400	6
997	21	440	6
1051	22	488	6
1107	23	528	6
1163	24	576	6
1220	25	624	6
1277	26	680	6
1336	27	736	5

3DB BANDWIDTH (HZ)	ACCEL_AAF_DELT; GYRO_AAF_DELT	ACCEL_AAF_DELTSQR; GYRO_AAF_DELTSQR	ACCEL_AAF_BITSHIFT; GYRO_AAF_BITSHIFT
1395	28	784	5
1454	29	848	5
1515	30	896	5
1577	31	960	5
1639	32	1024	5
1702	33	1088	5
1766	34	1152	5
1830	35	1232	5
1896	36	1296	5
1962	37	1376	4
2029	38	1440	4
2097	39	1536	4
2166	40	1600	4
2235	41	1696	4
2306	42	1760	4
2377	43	1856	4
2449	44	1952	4
2522	45	2016	4
2596	46	2112	4
2671	47	2208	4
2746	48	2304	4
2823	49	2400	4
2900	50	2496	4
2978	51	2592	4
3057	52	2720	4
3137	53	2816	3
3217	54	2944	3
3299	55	3008	3
3381	56	3136	3
3464	57	3264	3
3548	58	3392	3
3633	59	3456	3
3718	60	3584	3
3805	61	3712	3
3892	62	3840	3
3979	63	3968	3

The anti-alias filter can be selected or bypassed for the gyroscope by using the parameter GYRO_AAF_DIS in register bank 1, register 0x0Bh, bit 1 as shown below.

GYRO_AAF_DIS	FUNCTION
0	Enable gyroscope anti-aliasing filter
1	Disable gyroscope anti-aliasing filter

The anti-alias filter can be selected or bypassed for the accelerometer by using the parameter ACCEL_AAF_DIS in register bank 2, register 0x03h, bit 0 as shown below.

ACCEL_AAF_DIS	FUNCTION
0	Enable accelerometer anti-aliasing filter
1	Disable accelerometer anti-aliasing filter

5.4 USER PROGRAMMABLE OFFSET

Gyroscope and accelerometer offsets can be programmed by the user by using registers OFFSET_USER0, through OFFSET_USER8, in bank 0, registers 0x77h through 0x7Fh (bank 4) as shown below.

REGISTER ADDRESS	REGISTER NAME	BITS	FUNCTION
0x77h	OFFSET_USER0	7:0	Lower bits of X-gyro offset programmed by user. Max value is ± 64 dps, resolution is 1/32 dps.
0x78h	OFFSET_USER1	3:0	Upper bits of X-gyro offset programmed by user. Max value is ± 64 dps, resolution is 1/32 dps.
		7:4	Upper bits of Y-gyro offset programmed by user. Max value is ± 64 dps, resolution is 1/32 dps.
0x79h	OFFSET_USER2	7:0	Lower bits of Y-gyro offset programmed by user. Max value is ± 64 dps, resolution is 1/32 dps.
0x7Ah	OFFSET_USER3	7:0	Lower bits of Z-gyro offset programmed by user. Max value is ± 64 dps, resolution is 1/32 dps.
0x7Bh	OFFSET_USER4	3:0	Upper bits of Z-gyro offset programmed by user. Max value is ± 64 dps, resolution is 1/32 dps.
		7:4	Upper bits of X-accel offset programmed by user. Max value is ± 1 g, resolution is 0.5 mg.
0x7Ch	OFFSET_USER5	7:0	Lower bits of X-accel offset programmed by user. Max value is ± 1 g, resolution is 0.5 mg.
0x7Dh	OFFSET_USER6	7:0	Lower bits of Y-accel offset programmed by user. Max value is ± 1 g, resolution is 0.5 mg.
0x7Eh	OFFSET_USER7	3:0	Upper bits of Y-accel offset programmed by user. Max value is ± 1 g, resolution is 0.5 mg.
		7:4	Upper bits of Z-accel offset programmed by user. Max value is ± 1 g, resolution is 0.5 mg.
0x7Fh	OFFSET_USER8	7:0	Lower bits of Z-accel offset programmed by user. Max value is ± 1 g, resolution is 0.5 mg.

5.5 UI FILTER BLOCK

The UI filter block can be programmed to select filter order and bandwidth independently for gyroscope and accelerometer.

Gyroscope filter order can be selected by programming the parameter GYRO_UI_FILT_ORD in register bank 0, register 0x51h, bits 3:2, as shown below.

GYRO_UI_FILT_ORD	FILTER ORDER
00	1 st order
01	2 nd order
10	3 rd order
11	Reserved

Accelerometer filter order can be selected by programming the parameter ACCEL_UI_FILT_ORD in register bank 0, register 0x53h, bits 4:3, as shown below.

ACCEL_UI_FILT_ORD	FILTER ORDER
00	1 st order
01	2 nd order
10	3 rd order
11	Reserved

Gyroscope and accelerometer filter 3dB bandwidth can be selected by programming the parameter GYRO_UI_FILT_BW in register bank 0, register 0x52h, bits 3:0, and the parameter ACCEL_UI_FILT_BW in register bank 0, register 0x52h, bits 7:4, as shown below. The values shown in bold correspond to low noise and the values shown in italics correspond to low latency. User can select the appropriate setting based on the application requirements for power and latency. Corresponding Noise Bandwidth (NBW) and Group Delay values are also shown.

5.5.1 1st Order Filter 3dB Bandwidth, Noise Bandwidth (NBW), Group Delay

GYRO/ACCEL_ODR	ODR(Hz)	3dB Bandwidth (Hz) for GYRO/ACCEL_UI_FILT_ORD=0 (1st order filter)										
		GYRO/ACCEL_UI_FILT_BW										
1	32000											
2	16000											
3	8000											
4	4000											
5	2000											
6	1000	498.30	227.20	188.90	111.00	92.40	59.60	48.80	23.90	262.00	2096.30	
15	500	249.10	113.60	94.40	55.50	46.20	29.80	24.40	11.90	131.00	1048.10	
7	200	99.60	90.90	75.50	44.40	37.00	23.80	19.50	9.60	104.80	419.20	
8	100	49.80	90.90	75.50	44.40	37.00	23.80	19.50	9.60	104.80	209.60	
9	50	24.90	90.90	75.50	44.40	37.00	23.80	19.50	9.60	104.80	104.80	
10	25	12.50	90.90	75.50	44.40	37.00	23.80	19.50	9.60	104.80	52.40	
11	12.5	12.50	90.90	75.50	44.40	37.00	23.80	19.50	9.60	104.80	52.40	

		NBW Bandwidth (Hz) for GYRO/ACCEL_UI_FILT_ORD=0 (1st order filter)										
		GYRO/ACCEL_UI_FILT_BW										
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15	
1	32000											8831.7
2	16000											4410.6
3	8000											2204.6
4	4000											1102.2
5	2000											551.1
6	1000	551.1	230.8	196.3	126.5	108.9	75.8	64.1	34.1	275.6		2204.6
15	500	280.5	115.4	98.2	63.3	54.5	37.9	32.1	17.1	137.8		1102.2
7	200	112.2	92.4	78.5	50.6	43.6	30.3	25.7	13.7	110.3		440.9
8	100	56.1	92.4	78.5	50.6	43.6	30.3	25.7	13.7	110.3		220.5
9	50	28.1	92.4	78.5	50.6	43.6	30.3	25.7	13.7	110.3		110.3
10	25	14.1	92.4	78.5	50.6	43.6	30.3	25.7	13.7	110.3		55.2
11	12.5	14.1	92.4	78.5	50.6	43.6	30.3	25.7	13.7	110.3		55.2

		Group Delay @DC (ms) for GYRO/ACCEL_UI_FILT_ORD=0 (1st order filter)										
		GYRO/ACCEL_UI_FILT_BW										
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15	
1	32000											0.1
2	16000											0.1
3	8000											0.2
4	4000											0.4
5	2000											0.8
6	1000	0.6	1.8	2.0	2.8	3.1	4.1	4.7	8.1	1.5		0.2
15	500	1.1	3.6	4.0	5.5	6.1	8.1	9.3	16.2	3.0		0.4
7	200	2.7	4.4	5.0	6.8	7.6	10.2	11.7	20.3	3.8		1.0
8	100	5.3	4.4	5.0	6.8	7.6	10.2	11.7	20.3	3.8		1.9
9	50	10.5	4.4	5.0	6.8	7.6	10.2	11.7	20.3	3.8		3.8
10	25	21.0	4.4	5.0	6.8	7.6	10.2	11.7	20.3	3.8		7.5
11	12.5	21.0	4.4	5.0	6.8	7.6	10.2	11.7	20.3	3.8		7.5

5.5.2 2nd Order Filter 3dB Bandwidth, Noise Bandwidth (NBW), Group Delay

		3dB Bandwidth (Hz) for GYRO/ACCEL_UI_FILT_ORD=1 (2nd order filter)										
		GYRO/ACCEL_UI_FILT_BW										
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15	
1	32000	8400.0										
2	16000	4194.1										
3	8000	2096.3										
4	4000	1048.1										
5	2000	524.0										
6	1000	493.3	230.7	191.6	117.5	97.1	59.6	48.0	21.3	262.0	2096.3	
15	500	246.7	115.3	95.8	58.8	48.5	29.8	24.0	10.6	131.0	1048.1	
7	200	98.7	92.3	76.6	47.0	38.8	23.8	19.2	8.5	104.8	419.2	
8	100	49.3	92.3	76.6	47.0	38.8	23.8	19.2	8.5	104.8	209.6	
9	50	24.7	92.3	76.6	47.0	38.8	23.8	19.2	8.5	104.8	104.8	
10	25	12.3	92.3	76.6	47.0	38.8	23.8	19.2	8.5	104.8	52.4	
11	12.5	12.3	92.3	76.6	47.0	38.8	23.8	19.2	8.5	104.8	52.4	

		NBW Bandwidth (Hz) for GYRO/ACCEL_UI_FILT_ORD=1 (2nd order filter)										
		GYRO/ACCEL_UI_FILT_BW										
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15	
1	32000	8831.7										
2	16000	4410.6										
3	8000	2204.6										
4	4000	1102.2										
5	2000	551.1										
6	1000	551.1	223.7	189.9	122.7	102.8	64.7	52.5	23.7	275.6	2204.6	
15	500	259.6	111.9	95.0	61.4	51.4	32.4	26.3	11.9	137.8	1102.2	
7	200	103.9	89.5	76.0	49.1	41.2	25.9	21.0	9.5	110.3	440.9	
8	100	52.0	89.5	76.0	49.1	41.2	25.9	21.0	9.5	110.3	220.5	
9	50	26.0	89.5	76.0	49.1	41.2	25.9	21.0	9.5	110.3	110.3	
10	25	13.0	89.5	76.0	49.1	41.2	25.9	21.0	9.5	110.3	55.2	
11	12.5	13.0	89.5	76.0	49.1	41.2	25.9	21.0	9.5	110.3	55.2	

		Group Delay @DC (ms) for GYRO/ACCEL_UI_FILT_ORD=1 (2nd order filter)									
		GYRO/ACCEL_UI_FILT_BW									
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15
1	32000					0.1					
2	16000					0.1					
3	8000					0.2					
4	4000					0.4					
5	2000					0.8					
6	1000	0.7	2.1	2.4	3.2	3.7	5.2	6.1	12.0	1.5	0.2
15	500	1.3	4.1	4.7	6.4	7.3	10.4	12.2	24.0	3.0	0.4
7	200	3.3	5.1	5.8	8.0	9.1	12.9	15.3	30.0	3.8	1.0
8	100	6.5	5.1	5.8	8.0	9.1	12.9	15.3	30.0	3.8	1.9
9	50	12.9	5.1	5.8	8.0	9.1	12.9	15.3	30.0	3.8	3.8
10	25	25.7	5.1	5.8	8.0	9.1	12.9	15.3	30.0	3.8	7.5
11	12.5	25.7	5.1	5.8	8.0	9.1	12.9	15.3	30.0	3.8	7.5

5.5.3 3rd Order Filter 3dB Bandwidth, Noise Bandwidth (NBW), Group Delay

		3dB Bandwidth (Hz) for GYRO/ACCEL_UI_FILT_ORD=2 (3rd order filter)									
		GYRO/ACCEL_UI_FILT_BW									
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15
1	32000					8400.0					
2	16000					4194.1					
3	8000					2096.3					
4	4000					1048.1					
5	2000					524.0					
6	1000	492.9	234.7	195.8	118.9	97.9	60.8	46.8	25.2	262.0	2096.3
15	500	246.4	117.4	97.9	59.5	48.9	30.4	23.4	12.6	131.0	1048.1
7	200	98.6	93.9	78.3	47.6	39.2	24.3	18.7	10.1	104.8	419.2
8	100	49.3	93.9	78.3	47.6	39.2	24.3	18.7	10.1	104.8	209.6
9	50	24.6	93.9	78.3	47.6	39.2	24.3	18.7	10.1	104.8	104.8
10	25	12.3	93.9	78.3	47.6	39.2	24.3	18.7	10.1	104.8	52.4
11	12.5	12.3	93.9	78.3	47.6	39.2	24.3	18.7	10.1	104.8	52.4

		NBW Bandwidth (Hz) for GYRO/ACCEL_UI_FILT_ORD=2 (3rd order filter)									
		GYRO/ACCEL_UI_FILT_BW									
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15
1	32000										8831.7
2	16000										4410.6
3	8000										2204.6
4	4000										1102.2
5	2000										551.1
6	1000	551.1	221.3	188.5	120.1	100.0	62.9	48.6	26.4	275.6	2204.6
15	500	252.0	110.7	94.3	60.1	50.0	31.5	24.3	13.2	137.8	1102.2
7	200	100.8	88.6	75.4	48.1	40.0	25.2	19.5	10.6	110.3	440.9
8	100	50.4	88.6	75.4	48.1	40.0	25.2	19.5	10.6	110.3	220.5
9	50	25.2	88.6	75.4	48.1	40.0	25.2	19.5	10.6	110.3	110.3
10	25	12.6	88.6	75.4	48.1	40.0	25.2	19.5	10.6	110.3	55.2
11	12.5	12.6	88.6	75.4	48.1	40.0	25.2	19.5	10.6	110.3	55.2

		Group Delay @DC (ms) for GYRO/ACCEL_UI_FILT_ORD=2 (3rd order filter)									
		GYRO/ACCEL_UI_FILT_BW									
GYRO/ACCEL_ODR	ODR(Hz)	0	1	2	3	4	5	6	7	14	15
1	32000										0.1
2	16000										0.1
3	8000										0.2
4	4000										0.4
5	2000										0.8
6	1000	0.8	2.3	2.7	4.0	4.6	6.6	8.2	14.1	1.5	0.2
15	500	1.6	4.6	5.4	7.9	9.2	13.2	16.3	28.1	3.0	0.4
7	200	4.0	5.8	6.8	9.8	11.4	16.5	20.4	35.2	3.8	1.0
8	100	8.0	5.8	6.8	9.8	11.4	16.5	20.4	35.2	3.8	1.9
9	50	15.9	5.8	6.8	9.8	11.4	16.5	20.4	35.2	3.8	3.8
10	25	31.8	5.8	6.8	9.8	11.4	16.5	20.4	35.2	3.8	7.5
11	12.5	31.8	5.8	6.8	9.8	11.4	16.5	20.4	35.2	3.8	7.5

5.6 ODR AND FSR SELECTION

Gyroscope ODR can be selected by programming the parameter GYRO_ODR in register bank 0, register 0x4Fh, bits 3:0 as shown below.

GYRO_ODR	GYROSCOPE ODR VALUE
0000	Reserved
0001	32 kHz
0010	16 kHz
0011	8 kHz
0100	4 kHz
0101	2 kHz
0110	1 kHz (default)
0111	200 Hz
1000	100 Hz
1001	50 Hz
1010	25 Hz
1011	12.5 Hz
1100	Reserved
1101	Reserved
1110	Reserved
1111	500 Hz

Gyroscope FSR can be selected by programming the parameter GYRO_FS_SEL in register bank 0, register 0x4Fh, bits 7:5 as shown below.

GYRO_FS_SEL	GYROSCOPE FSR VALUE
000	4000 dps
001	2000 dps
010	1000 dps
011	500 dps
100	250 dps
101	125 dps
110	62.5 dps
111	31.25 dps

Accelerometer ODR can be selected by programming the parameter ACCEL_ODR in register bank 0, register 0x50h, bits 3:0 as shown below.

ACCEL_ODR	ACCELEROMETER ODR VALUE
0000	Reserved
0001	32 kHz (LN mode)
0010	16 kHz (LN mode)
0011	8 kHz (LN mode)
0100	4 kHz (LN mode)
0101	2 kHz (LN mode)
0110	1 kHz (LN mode) (default)
0111	200 Hz (LP or LN mode)
1000	100 Hz (LP or LN mode)
1001	50 Hz (LP or LN mode)
1010	25 Hz (LP or LN mode)
1011	12.5 Hz (LP or LN mode)
1100	6.25 Hz (LP mode)
1101	3.125 Hz (LP mode)
1110	1.5625 Hz (LP mode)
1111	500 Hz (LP or LN mode)

Accelerometer FSR can be selected by programming the parameter ACCEL_FS_SEL in register bank 0, register 0x50h, bits 7:5 as shown below.

ACCEL_FS_SEL	ACCELEROMETER FSR VALUE
000	32g
001	16g
010	8g
011	4g
100	Reserved
101	Reserved
110	Reserved
111	Reserved

6 FIFO

The IIM-42653 contains a 2K-byte FIFO register that is accessible via the serial interface. The FIFO configuration register determines which data is written into the FIFO. Possible choices include gyroscope data, accelerometer data, temperature readings, and FSYNC input. A FIFO counter keeps track of how many bytes of valid data are contained in the FIFO.

6.1 PACKET STRUCTURE

The following figure shows the FIFO packet structures supported in IIM-42653. Base data format for gyroscope and accelerometer is 16-bits per element. 20-bits data format support is included in one of the packet structures. When 20-bits data format is used, gyroscope data consists of 19-bits of actual data and the LSB is always set to 0, accelerometer data consists of 18-bits of actual data and the two lowest order bits are always set to 0. When 20-bits data format is used, the only FSR settings that are operational are ± 4000 dps for gyroscope and $\pm 32g$ for accelerometer, even if the FSR selection register settings are configured for other FSR values. The corresponding sensitivity scale factor values are 131 LSB/dps for gyroscope and 8192 LSB/g for accelerometer.

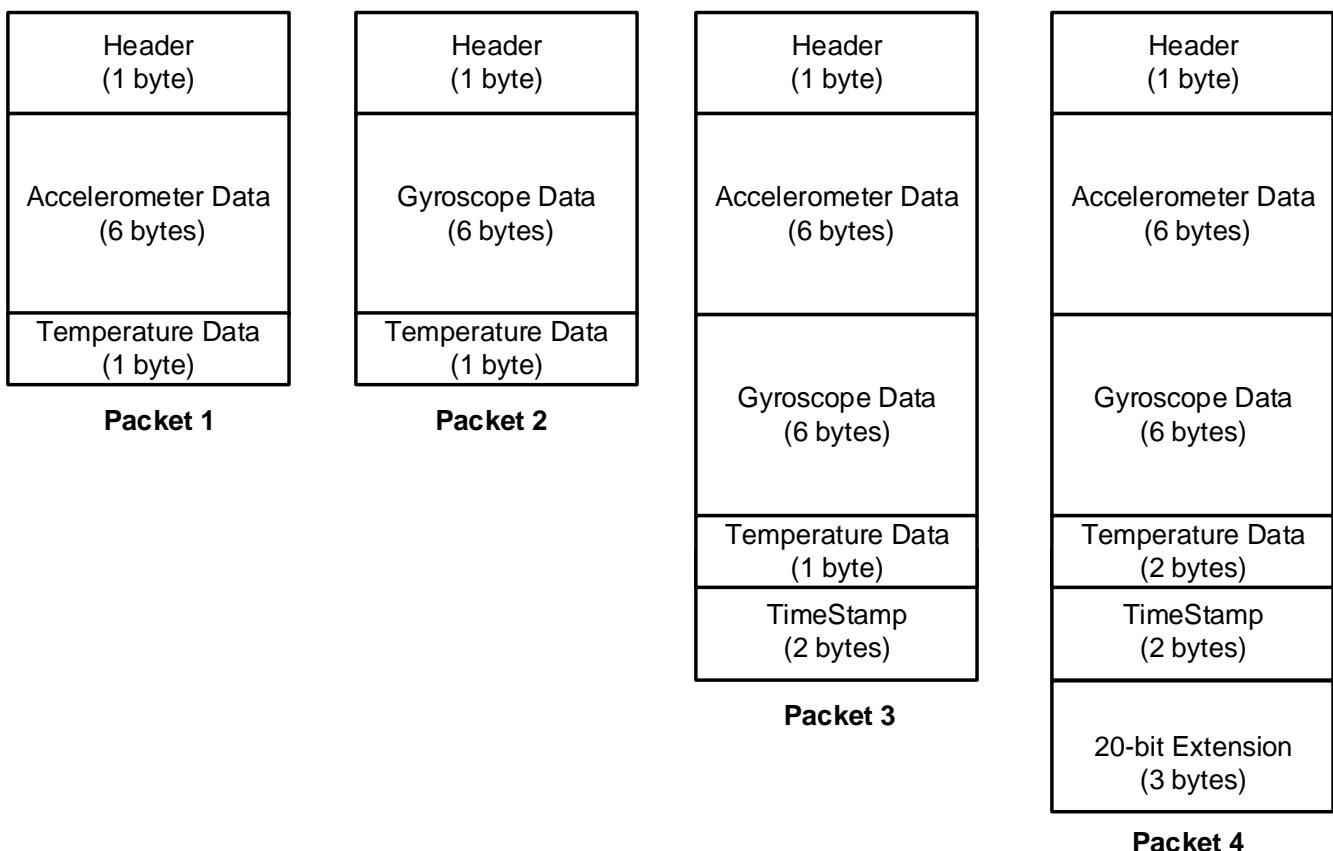


Figure 10. FIFO Packet Structure

Due to limitations on the number of bits, 8-bit temperature data stored in FIFO is limited to a -40°C to 85°C range. Either 16-bit temperature data format (FIFO packet 4) or the value from the sensor data registers (TEMP_DATA) must be used to support a temperature measurements range of -40°C to 105°C.

The rest of this sub-section describes how individual data is packaged in the different FIFO packet structures.

Packet 1: Individual data is packaged in Packet 1 as shown below.

BYTE	CONTENT
0x00	FIFO Header
0x01	Accel X [15:8]
0x02	Accel X [7:0]
0x03	Accel Y [15:8]
0x04	Accel Y [7:0]
0x05	Accel Z [15:8]
0x06	Accel Z [7:0]
0x07	Temperature[7:0]

Packet 2: Individual data is packaged in Packet 2 as shown below.

BYTE	CONTENT
0x00	FIFO Header
0x01	Gyro X [15:8]
0x02	Gyro X [7:0]
0x03	Gyro Y [15:8]
0x04	Gyro Y [7:0]
0x05	Gyro Z [15:8]
0x06	Gyro Z [7:0]
0x07	Temperature[7:0]

Packet 3: Individual data is packaged in Packet 3 as shown below.

BYTE	CONTENT
0x00	FIFO Header
0x01	Accel X [15:8]
0x02	Accel X [7:0]
0x03	Accel Y [15:8]
0x04	Accel Y [7:0]
0x05	Accel Z [15:8]
0x06	Accel Z [7:0]
0x07	Gyro X [15:8]
0x08	Gyro X [7:0]
0x09	Gyro Y [15:8]
0x0A	Gyro Y [7:0]
0x0B	Gyro Z [15:8]
0x0C	Gyro Z [7:0]
0x0D	Temperature[7:0]
0x0E	TimeStamp[15:8]
0x0F	TimeStamp[7:0]

Packet 4: Individual data is packaged in Packet 4 as shown below.

BYTE	CONTENT	
0x00	FIFO Header	
0x01	Accel X [19:12]	
0x02	Accel X [11:4]	
0x03	Accel Y [19:12]	
0x04	Accel Y [11:4]	
0x05	Accel Z [19:12]	
0x06	Accel Z [11:4]	
0x07	Gyro X [19:12]	
0x08	Gyro X [11:4]	
0x09	Gyro Y [19:12]	
0x0A	Gyro Y [11:4]	
0x0B	Gyro Z [19:12]	
0x0C	Gyro Z [11:4]	
0x0D	Temperature[15:8]	
0x0E	Temperature[7:0]	
0x0F	TimeStamp[15:8]	
0x10	TimeStamp[7:0]	
0x11	Accel X [3:0]	Gyro X [3:0]
0x12	Accel Y [3:0]	Gyro Y [3:0]
0x13	Accel Z [3:0]	Gyro Z [3:0]

6.2 FIFO HEADER

The following table shows the structure of the 1-byte FIFO header.

BIT FIELD	ITEM	DESCRIPTION
7	HEADER_MSG	1: FIFO is empty 0: Packet contains sensor data
6	HEADER_ACCEL	1: Packet is sized so that accel data have location in the packet, FIFO_ACCEL_EN must be 1 0: Packet does not contain accel sample
5	HEADER_GYRO	1: Packet is sized so that gyro data have location in the packet, FIFO_GYRO_EN must be 1 0: Packet does not contain gyro sample
4	HEADER_20	1: Packet has a new and valid sample of extended 20-bit data for gyro and/or accel 0: Packet does not contain a new and valid extended 20-bit data
3:2	HEADER_TIMESTAMP_FSYNC	00: Packet does not contain timestamp or FSYNC time data 01: Reserved 10: Packet contains ODR Timestamp 11: Packet contains FSYNC time, and this packet is flagged as first ODR after FSYNC (only if FIFO_TMST_FSYNC_EN is 1)
1	HEADER_ODR_ACCEL	1: The ODR for accel is different for this accel data packet compared to the previous accel packet 0: The ODR for accel is the same as the previous packet with accel
0	HEADER_ODR_GYRO	1: The ODR for gyro is different for this gyro data packet compared to the previous gyro packet 0: The ODR for gyro is the same as the previous packet with gyro

Note at least HEADER_ACCEL or HEADER_GYRO must be set for a sensor data packet to be set.

6.3 MAXIMUM FIFO STORAGE

The maximum number of packets that can be stored in FIFO is a variable quantity depending on the use case. As shown in Figure 11, the physical FIFO size is 2048 bytes. A number of bytes equal to the packet size selected (see section 6.1) is reserved to prevent reading a packet during write operation. Additionally, a read cache 2 packets wide is available.

When there is no serial interface operation, the read cache is not available for storing packets, being fed by the serial interface clock.

When serial interface operation happens, depending on the operation length and the packet size chosen, either 1 or 2 of the packet entries in read cache may become available for storing packets. In that case the total storage available is up to the maximum number of packets that can be accommodated in 2048 bytes + 1 packet size, depending on the packet size used.

Due to the non-deterministic nature of system operation, driver memory allocation should always be the largest size of 2080 bytes.

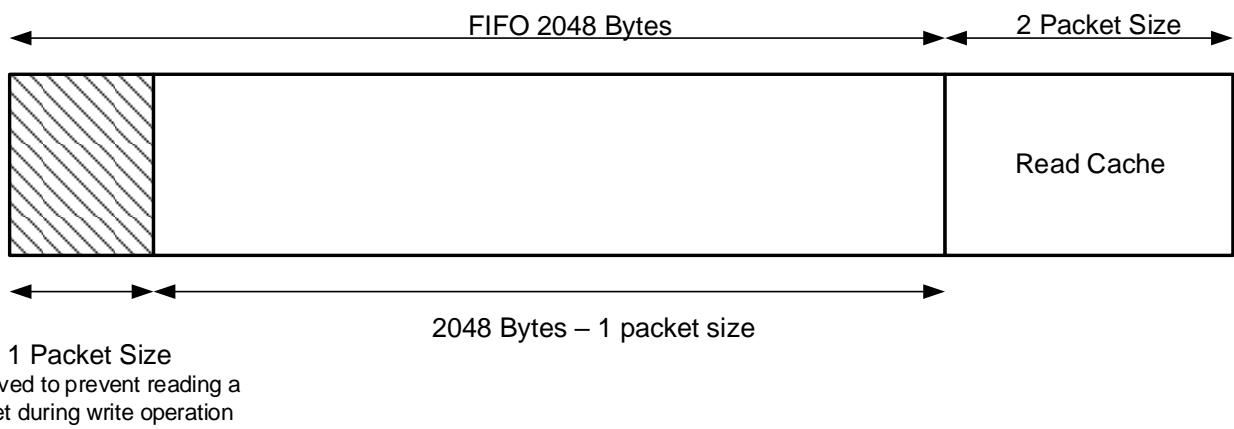


Figure 11. Maximum FIFO Storage

6.4 FIFO CONFIGURATION REGISTERS

The following control bits in bank 0, register 0x5Fh determine what data is placed into the FIFO. The values of these bits may change while the FIFO is being filled without corruption of the FIFO.

BIT	NAME	FUNCTION
4	FIFO_HIRES_EN	0: Default setting; Sensor data have regular resolution 1: Sensor data in FIFO will have extended resolution enabling the 20 Bytes packet with priority on other setting below
3	FIFO_TMST_FSYNC_EN	0: FIFO will only contain ODR timestamp information 1: FIFO can also contain FSYNC time and FSYNC tag for one ODR after an FSYNC event
1	FIFO_GYRO_EN	0: Default setting; Gyroscope data not placed into FIFO 1: Enables gyroscope data packets of 6-bytes to be placed in FIFO
0	FIFO_ACCEL_EN	0: Default setting; Accelerometer data not placed into FIFO 1: Enables accelerometer data packets of 6-bytes to be placed in FIFO

Configuration register settings above impact FIFO header and FIFO packet size as follows:

FIFO_HIRES_EN	FIFO_ACCEL_EN	FIFO_GYRO_EN	FIFO_TMST_FSYNC_EN	HEADER	PACKET SIZE
1	X	X	0	8'b_0111_10xx	20 Bytes
1	X	X	1	8'b_0111_11xx	20 Bytes
0	1	1	0	8'b_0110_10xx	16 Bytes
0	1	1	1	8'b_0110_11xx	16 Bytes
0	1	0	X	8'b_0100_00xx	8 Bytes
0	0	1	X	8'b_0010_00xx	8 Bytes
0	0	0	X	No FIFO writes	No FIFO writes

7 PROGRAMMABLE INTERRUPTS

The IIM-42653 has a programmable interrupt system that can generate an interrupt signal on the INT pins. Status flags indicate the source of an interrupt. Interrupt sources may be enabled and disabled individually. There are two interrupt outputs. Any interrupt may be mapped to either interrupt pin as explained in the register section. The following configuration options are available for the interrupts:

- INT1 and INT2 can be push-pull or open drain
- Level or pulse mode
- Active high or active low

Additionally, IIM-42653 includes In-band Interrupt (IBI) support for the I²CSM interface.

8 APEX MOTION FUNCTIONS

The APEX (Advanced Pedometer and Event Detection – neXt gen) features of IIM-42653 consist of:

- Pedometer: tracks step count and issues a step detect interrupt.
- Tilt Detection: issues an interrupt when the tilt angle exceeds 35 degrees for more than a programmable time.
- Freefall Detection: triggers an interrupt when device freefall is detected and outputs freefall duration.
- Tap Detection: issues an interrupt when tap is detected, along with a register containing the tap count.
- Wake on Motion (WoM): detects motion when accelerometer samples exceed a programmable threshold. This motion event can be used to enable chip operation from sleep mode.
- Significant Motion Detector (SMD): detects motion if WoM events are detected during a programmable time window (2s or 4s).

8.1 APEX ODR SUPPORT

APEX algorithms are designed to work with the accelerometer for a variety of ODR settings. However, there is a minimum ODR required for each algorithm. The following table shows the relationship between the available accelerometer ODRs and the operation of the APEX algorithms. In order to allow more flexible operation where we can control the ODR of the APEX algorithms independent of the accelerometer ODR, we allow for an additional selection determined by the field DMP_ODR (DMP stands for Digital Motion Processor™, an architectural component of APEX). The tables below show how DMP_ODR should be configured in relation to the accelerometer ODR and the expected performance.

ACCEL ODR	DMP_ODR	PEDOMETER	TILT DETECTION	FREEFALL DETECTION
< 25 Hz	X	Disabled	Disabled	Disabled
≥ 25Hz	0 (25 Hz)	Low Power	Low Power	Low Power
≥ 50 Hz	2 (50 Hz)	Normal	Normal	Low Power
100 Hz	3 (100 Hz)	Normal (50 Hz)	High Performance (50 Hz)	Normal
500 Hz	1 (500 Hz)	Disabled	High Performance (50 Hz)	High Performance

ACCEL ODR	TAP DETECTION
200 Hz	Low Power
500 Hz	Normal
1 kHz	High Performance
> 1 kHz	Disabled

If the accelerometer ODR is set below the minimum DMP ODR (25 Hz), the APEX features cannot be enabled.

When the accelerometer ODR needs to be set differently from the DMP ODR, only the integer multiple of DMP ODR for accelerometer sensor ODR is suitable to use with DMP. For example, when the accelerometer ODR is set as 200 Hz, the APEX features can be enabled with choices of 25 Hz, or 50 Hz, depending on the DMP_ODR register setting.

DMP ODR should not be changed on the fly. The following sequence should be followed for changing the DMP ODR:

1. Disable Pedometer and Tilt Detection if they are enabled
2. Change DMP ODR
3. Set DMP_INIT_EN for one cycle (Register 0x4Bh in Bank 0)
4. Unset DMP_INIT_EN (Register 0x4Bh in Bank 0)
5. Enable APEX features of interest

8.2 DMP POWER SAVE MODE

DMP Power Save Mode can be enabled or disabled by DMP_POWER_SAVE (Register 0x56h in Bank 0). When the DMP Power Save Mode is enabled, APEX features are enabled only when WOM is detected. WOM must be explicitly enabled for the DMP to work in this mode. When WOM is not detected the APEX features are on pause. If the user does not want to use DMP Power Save Mode they may set DMP_POWER_SAVE = 0, and use APEX functions without WOM detection.

8.3 PEDOMETER PROGRAMMING

- Pedometer configuration parameters
 1. LOW_ENERGY_AMP_TH_SEL (Register 0x40h in Bank 4)
 2. PED_AMP_TH_SEL (Register 0x41h in Bank 4)
 3. PED_STEP_CNT_TH_SEL (Register 0x41h in Bank 4)
 4. PED_HI_EN_TH_SEL (Register 0x42h in Bank 4)
 5. PED_SB_TIMER_TH_SEL (Register 0x42h in Bank 4)
 6. PED_STEP_DET_TH_SEL (Register 0x42h in Bank 4)
 7. SENSITIVITY_MODE (Register 0x48h in Bank 4)
 8. There are 2 ODR and 2 sensitivity modes
- Initialize Sensor in a typical configuration
 1. Set accelerometer ODR to 50 Hz (Register 0x50h in Bank 0)
 2. Set accelerometer to low power mode (Register 0x4Eh in Bank 0)
ACCEL_MODE = 2 and (Register 0x4Eh in Bank 0), ACCEL_LP_CLK_SEL = 0, for low power mode
 3. Set DMP ODR = 50 Hz and turn on Pedometer feature (Register 0x56h in Bank 0)
 4. Wait 1 millisecond
- Initialize APEX hardware
 1. Set DMP_MEM_RESET_EN to 1 (Register 0x4Bh in Bank 0)
 2. Wait 1 millisecond
 3. Set LOW_ENERGY_AMP_TH_SEL to 10 (Register 0x40h in Bank 4)
 4. Set PED_AMP_TH_SEL to 8 (Register 0x41h in Bank 4)
 5. Set PED_STEP_CNT_TH_SEL to 5 (Register 0x41h in Bank 4)
 6. Set PED_HI_EN_TH_SEL to 1 (Register 0x42h in Bank 4)
 7. Set PED_SB_TIMER_TH_SEL to 4 (Register 0x42h in Bank 4)
 8. Set PED_STEP_DET_TH_SEL to 2 (Register 0x42h in Bank 4)
 9. Set SENSITIVITY_MODE to 0 (Register 0x48h in Bank 4)
 10. Set DMP_INIT_EN to 1 (Register 0x4Bh in Bank 0)

ACCEL ODR (DMP_ODR)	NORMAL	SLOW WALK
25 Hz (0)	low power	low power and slow walk
50 Hz (2)	high performance	slow walk

11. Wait 50 milliseconds
 12. Enable STEP detection, source for INT1 by setting bit 5 in register INT_SOURCE6 (Register 0x4Dh in Bank 4) to 1. Or if INT2 is selected for STEP detection, enable STEP detection source by setting bit 5 in register INT_SOURCE7 (Register 0x4Eh in Bank 4) to 1.
 13. As freefall and pedometer share the same output register, they cannot run concurrently. Disable freefall by setting FF_ENABLE to 0 (Register 0x56h in Bank 0)
 14. Turn on Pedometer feature by setting PED_ENABLE to 1 (Register 0x56h in Bank 0)
- Output registers
 1. Read interrupt register (Register 0x38h in Bank 0) for STEP_DET_INT
 2. If the step count is equal to or greater than 65535 (uint16), the STEP_CNT_OVF_INT (Register 0x38h in Bank 0) will be set to 1. Example:
 - Take 1 step => output step count = 65533 (real step count is 65533)
 - Take 1 step => output step count = 65534 (real step count is 65534)
 - Take 1 step => output step count = 0 and interrupt is fired (real step count is 65535+0=65535)
 - Take 1 step => output step count = 1 (real step count is 65535+1=65536)
 3. Read the step count in STEP_CNT (Register 0x31h and 0x32h in Bank 0)
 4. Read the step cadence in STEP_CADENCE (Register 0x33h in Bank 0)
 5. Read the activity class in ACTIVITY_CLASS (Register 0x34h in Bank 0)

8.4 TILT DETECTION PROGRAMMING

- Tilt Detection configuration parameters
 1. TILT_WAIT_TIME (Register 0x43h in Bank 4)
This parameter configures how long of a delay after tilt is detected before interrupt is triggered
Default is 2 (4s).
Range is 0 = 0s, 1 = 2s, 2 = 4s, 3 = 6s
For example, setting TILT_WAIT_TIME = 2 is equivalent to 4 seconds for all ODRs
- Initialize Sensor in a typical configuration
 1. Set accelerometer ODR (Register 0x50h in Bank 0)
ACCEL_ODR = 9 for 50 Hz or 10 for 25 Hz
 2. Set Accel to Low Power mode (Register 0x4Eh in Bank 0)
ACCEL_MODE = 2 and (Register 0x4Dh in Bank 0), ACCEL_LP_CLK_SEL = 0, for low power mode
 3. Set DMP ODR (Register 0x56h in Bank 0)
DMP_ODR = 0 for 25 Hz, 2 for 50 Hz
 4. Wait 1 millisecond
- Initialize APEX hardware
 1. Set DMP_MEM_RESET_EN to 1 (Register 0x4Bh in Bank 0)
 2. Wait 1 millisecond
 3. Set TILT_WAIT_TIME (Register 0x43h in Bank 4) if default value does not meet needs
 4. Wait 1 millisecond
 5. Set DMP_INIT_EN to 1 (Register 0x4Bh in Bank 0)
 6. Enable Tilt Detection, source for INT1 by setting bit 3 in register INT_SOURCE6 (Register 0x4Dh in Bank 4) to 1. Or if INT2 is selected for Tilt Detection, enable Tilt Detection source by setting bit 3 in register INT_SOURCE7 (Register 0x4Eh in Bank 4) to 1.
 7. Wait 50 milliseconds
 8. Turn on Tilt Detection feature by setting TILT_ENABLE to 1 (Register 0x56h in Bank 0)
- Output registers
 1. Read interrupt register (Register 0x38h in Bank 0) for TILT_DET_INT

8.5 FREEFALL DETECTION PROGRAMMING

Freefall Detection detects device freefall. It uses a low-g and a high-g detector to detect freefall start and freefall end. It provides a trigger indicating freefall event and the freefall duration. The duration is given in number of samples and can be converted to freefall distance in meters by applying the following formula:

$$\text{FF_DISTANCE} = 0.5 * 9.81 * (\text{FF_DUR} * \text{DMP_ODR_S})^2$$

Note: DMP_ODR_S is the duration of DMP_ODR expressed in seconds.

- Freefall Detection configuration parameters
 1. LOWG_PEAK_TH_SEL (Register 0x44h in Bank 4)
 2. LOWG_TIME_TH_SEL (Register 0x44h in Bank 4)
 3. LOWG_PEAK_TH_HYST_SEL (Register 0x43h in Bank 4)
 4. HIGHG_PEAK_TH_SEL (Register 0x45h in Bank 4)
 5. HIGHG_TIME_TH_SEL (Register 0x45h in Bank 4)
 6. HIGHG_PEAK_TH_HYST_SEL (Register 0x43h in Bank 4)
 7. FF_MIN_DURATION_CM (Register 0x49h in Bank 4)
 8. FF_MAX_DURATION_CM (Register 0x49h in Bank 4)
 9. FF_DEBOUNCE_DURATION (Register 0x49h in Bank 4)
- Initialize Sensor in a typical configuration
 1. Set Accel ODR to 500 Hz (Register 0x50h in Bank 0)
 2. Set AVG filtering to 1 sample to minimize power consumption (Register 0x52h in Bank 0)
ACCEL_UI_FILT_BW = 1
 3. Set Accel to Low Power mode (Register 0x4E in Bank 0)
ACCEL_MODE[1:0] = 2
 4. Set DMP ODR = 500 Hz (Register 0x56 in Bank 0)
DMP_ODR[1:0] = 1
- Initialize APEX hardware
 1. Set LOWG_PEAK_TH_SEL (Register 0x44h in Bank 4)
 2. Set LOWG_TIME_TH_SEL (Register 0x44h in Bank 4)
 3. Set LOWG_PEAK_TH_HYST_SEL (Register 0x43h in Bank 4)
 4. Set HIGHG_PEAK_TH_SEL (Register 0x45h in Bank 4)
 5. Set HIGHG_TIME_TH_SEL (Register 0x45h in Bank 4)
 6. Set HIGHG_PEAK_TH_HYST_SEL (Register 0x43h in Bank 4)
 7. Set FF_DEBOUNCE_DURATION (Register 0x49h in Bank 4)
 8. Set FF_MIN_DURATION_CM (Register 0x49h in Bank 4)
 9. Set FF_MAX_DURATION_CM (Register 0x49h in Bank 4)
 10. Set DMP_MEM_RESET_EN to 1 if DMP is started for the first time after reset (Register 0x4Bh in Bank 0)
 11. Wait 1 millisecond
 12. Set DMP_INIT_EN to 1 (Register 0x4Bh in Bank 0)
 13. Enable FREEFALL detection, source for INT1 by setting bit 1 in register INT_SOURCE6 (Register 0x4Dh in Bank 4) to 1. Or if INT2 is selected for FREEFALL detection, enable FREEFALL detection source by setting bit 1 in register INT_SOURCE7 (Register 0x4Eh in Bank 4) to 1.
 14. Wait 50 milliseconds
 15. As freefall and pedometer share the same output register, they cannot run concurrently. Disable pedometer by setting PED_ENABLE to 0 (Register 0x56h in Bank 0)
 16. Set FF_ENABLE to 1 (Register 0x56h in Bank 0)
- Output registers
 1. Read interrupt register (Register 0x38h in Bank 0) for FF_DET_INT

2. Read the freefall duration (Registers 0x31h and 0x32h in Bank 0)
- **Note:** As freefall and pedometer share the same output register, they cannot be run concurrently.

8.6 TAP DETECTION PROGRAMMING

- Tap Detection configuration parameters
 1. TAP_TMAX (Register 0x47h in Bank 4)
 2. TAP_TMIN (Register 0x47h in Bank 4)
 3. TAP_TAVG (Register 0x47h in Bank 4)
 4. TAP_MIN_JERK_THR (Register 0x46h in Bank 4)
 5. TAP_MAX_PEAK_TOL (Register 0x46h in Bank 4)
 6. TAP_ENABLE (Register 0x56h in Bank 0)
- Initialize Sensor in a typical configuration
 1. Set accelerometer ODR (Register 0x50h in Bank 0)
ACCEL_ODR = 15 for 500 Hz (ODR of 200Hz or 1kHz may also be used)
 2. Set power modes and filter configurations as shown below
 - For ODR up to 500 Hz, set Accel to Low Power mode (Register 0x4Eh in Bank 0)
ACCEL_MODE = 2 and ACCEL_LP_CLK_SEL = 0, (Register 0x4Dh in Bank 0) for low power mode
Set filter settings as follows: ACCEL_DEC2_M2_ORD = 2 (Register 0x53h in Bank 0);
ACCEL_UI_FILT_BW = 4 (Register 0x52h in Bank 0)
 - For ODR of 1 kHz, set Accel to Low Noise mode (Register 0x4Eh in Bank 0) ACCEL_MODE = 1
Set filter settings as follows: ACCEL_UI_FILT_ORD = 2 (Register 0x53h in Bank 0);
ACCEL_UI_FILT_BW = 0 (Register 0x52h in Bank 0)
 3. Wait 1 millisecond
- Initialize APEX hardware
 1. Set TAP_TMAX to 2 (Register 0x47h in Bank 4)
 2. Set TAP_TMIN to 3 (Register 0x47h in Bank 4)
 3. Set TAP_TAVG to 3 (Register 0x47h in Bank 4)
 4. Set TAP_MIN_JERK_THR to 17 (Register 0x46h in Bank 4)
 5. Set TAP_MAX_PEAK_TOL to 2 (Register 0x46h in Bank 4)
 6. Wait 1 millisecond
 7. Enable TAP source for INT1 by setting bit 0 in register INT_SOURCE6 (Register 0x4Dh in Bank 4) to 1.
Or if INT2 is selected for TAP, enable TAP source by setting bit 0 in register INT_SOURCE7 (Register 0x4Eh in Bank 4) to 1.
 8. Wait 50 milliseconds
 9. Turn on TAP feature by setting TAP_ENABLE to 1 (Register 0x56h in Bank 0)
- Output registers
 1. Read interrupt register (Register 0x38h in Bank 0) for TAP_DET_INT
 2. Read the tap count in TAP_NUM (Register 0x7Bh in Bank 0)
 3. Read the tap axis in TAP_AXIS (Register 0x7Bh in Bank 0)
 4. Read the polarity of tap pulse in TAP_DIR (Register 0x7Bh in Bank 0)

8.7 WAKE ON MOTION PROGRAMMING

- Wake on Motion configuration parameters
 1. WOM_X_TH (Register 0x4Ah in Bank 4)

2. WOM_Y_TH (Register 0x4Bh in Bank 4)
 3. WOM_Z_TH (Register 0x4Ch in Bank 4)
 4. WOM_INT_MODE (Register 0x57h in Bank 0)
 5. WOM_MODE (Register 0x57h in Bank 0)
 6. SMD_MODE (Register 0x57h in Bank 0)
- Initialize Sensor in a typical configuration
 1. Set accelerometer ODR (Register 0x50h in Bank 0)
ACCEL_ODR = 9 for 50 Hz
 2. Set Accel to Low Power mode (Register 0x4Eh in Bank 0)
ACCEL_MODE = 2 and (Register 0x4Dh in Bank 0), ACCEL_LP_CLK_SEL = 0, for low power mode
 3. Wait 1 millisecond
 - Initialize APEX hardware
 1. Set WOM_X_TH to 98 (Register 0x4Ah in Bank 4)
 2. Set WOM_Y_TH to 98 (Register 0x4Bh in Bank 4)
 3. Set WOM_Z_TH to 98 (Register 0x4Ch in Bank 4)
 4. Wait 1 millisecond
 5. Enable all 3 axes as WOM sources for INT1 by setting bits 2:0 in register INT_SOURCE1 (Register 0x66h in Bank 0) to 1. Or if INT2 is selected for WOM, enable all 3 axes as WOM sources by setting bits 2:0 in register INT_SOURCE4 (Register 0x69h in Bank 0) to 1.
 6. Wait 50 milliseconds
 7. Turn on WOM feature by setting WOM_INT_MODE to 0, WOM_MODE to 1, SMD_MODE to 1 (Register 0x56h in Bank 0)
 - Output registers
 1. Read interrupt register (Register 0x37h in Bank 0) for WOM_X_INT
 2. Read interrupt register (Register 0x37h in Bank 0) for WOM_Y_INT
 3. Read interrupt register (Register 0x37h in Bank 0) for WOM_Z_INT

8.8 SIGNIFICANT MOTION DETECTION PROGRAMMING

- Significant Motion Detection configuration parameters
 1. WOM_X_TH (Register 0x4Ah in Bank 4)
 2. WOM_Y_TH (Register 0x4Bh in Bank 4)
 3. WOM_Z_TH (Register 0x4Ch in Bank 4)
 4. WOM_INT_MODE (Register 0x57h in Bank 0)
 5. WOM_MODE (Register 0x57h in Bank 0)
 6. SMD_MODE (Register 0x57h in Bank 0)
- Initialize Sensor in a typical configuration
 1. Set accelerometer ODR (Register 0x50h in Bank 0)
ACCEL_ODR = 9 for 50 Hz
 2. Set Accel to Low Power mode (Register 0x4Eh in Bank 0)
ACCEL_MODE = 2 and (Register 0x4Dh in Bank 0), ACCEL_LP_CLK_SEL = 0, for low power mode
 3. Wait 1 millisecond

- Initialize APEX hardware
 1. Set WOM_X_TH to 98 (Register 0x4Ah in Bank 4)
 2. Set WOM_Y_TH to 98 (Register 0x4Bh in Bank 4)
 3. Set WOM_Z_TH to 98 (Register 0x4Ch in Bank 4)
 4. Wait 1 millisecond
 5. Enable SMD source for INT1 by setting bit 3 in register INT_SOURCE1 (Register 0x66h in Bank 0) to 1.
Or if INT2 is selected for SMD, enable SMD source by setting bit 3 in register INT_SOURCE4 (Register 0x69h in Bank 0) to 1.
 6. Wait 50 milliseconds
 7. Turn on SMD feature by setting WOM_INT_MODE to 0, WOM_MODE to 1, SMD_MODE to 3 (Register 0x56h in Bank 0)
- Output registers
 1. Read interrupt register (Register 0x37h in Bank 0) for SMD_INT

9 DIGITAL INTERFACE

9.1 I³CSM, I²C, AND SPI SERIAL INTERFACES

The internal registers and memory of the IIM-42653 can be accessed using I³CSM at 12.5 MHz (data rates up to 12.5 Mbps in SDR mode, 25 Mbps in DDR mode), I²C at 1 MHz or SPI at 24 MHz. SPI operates in 3-wire or 4-wire mode. Pin assignments for serial interfaces are described in Section **Error! Reference source not found..**

9.2 I³CSM INTERFACE

I³CSM is a new 2-wire digital interface comprised of the signals serial data (SDA) and serial clock (SCLK). I³CSM is intended to improve upon the I²C interface, while preserving backward compatibility.

I³CSM carries the advantages of I²C in simplicity, low pin count, easy board design, and multi-drop (vs. point to point), but provides the higher data rates, simpler pads, and lower power of SPI. I³CSM adds higher throughput for a given frequency, in-band interrupts (from slave to master), dynamic addressing.

IIM-42653 supports the following features of I³CSM:

- SDR data rate up to 12.5 Mbps
- DDR data rate up to 25 Mbps
- Dynamic address allocation
- In-band Interrupt (IBI) support
- Support for asynchronous timing control mode 0
- Error detection (CRC and/or Parity)
- Common Command Code (CCC)

The IIM-42653 always operates as an I³CSM slave device when communicating to the system processor, which thus acts as the I³CSM master. I³CSM master controls an active pullup resistance on SDA, which it can enable and disable. The pullup resistance may be a board level resistor controlled by a pin, or it may be internal to the I³CSM master.

9.3 I²C INTERFACE

I²C is a two-wire interface comprised of the signals serial data (SDA) and serial clock (SCL). In general, the lines are open-drain and bi-directional. In a generalized I²C interface implementation, attached devices can be a master or a slave. The master device puts the slave address on the bus, and the slave device with the matching address acknowledges the master.

The IIM-42653 always operates as a slave device when communicating to the system processor, which thus acts as the master. SDA and SCL lines typically need pull-up resistors to VDDIO. The maximum bus speed is 1 MHz.

The slave address of the IIM-42653 is b110100X, which is 7 bits long. The LSB bit of the 7-bit address is determined by the logic level on pin AP_ADO. This allows two IIM-42653s to be connected to the same I²C bus. When used in this configuration, the address of one of the devices should be b1101000 (pin AP_ADO is logic low) and the address of the other should be b1101001 (pin AP_ADO is logic high).

9.4 I²C COMMUNICATIONS PROTOCOL

START (S) and STOP (P) Conditions

Communication on the I²C bus starts when the master puts the START condition (S) on the bus, which is defined as a HIGH-to-LOW transition of the SDA line while SCL line is HIGH (see figure below). The bus is considered to be busy until the master puts a STOP condition (P) on the bus, which is defined as a LOW to HIGH transition on the SDA line while SCL is HIGH (see figure below).

Additionally, the bus remains busy if a repeated START (Sr) is generated instead of a STOP condition.

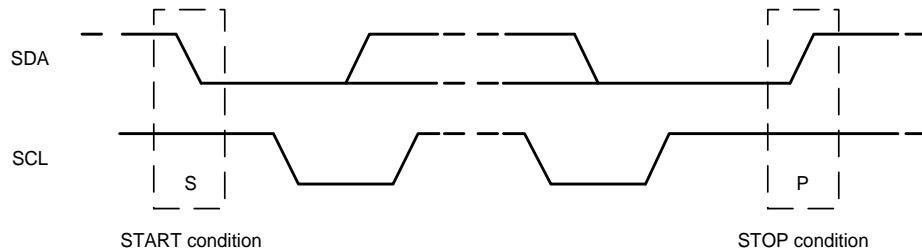



Figure 12. START and STOP Conditions

Data Format / Acknowledge

I²C data bytes are defined to be 8-bits long. There is no restriction to the number of bytes transmitted per data transfer. Each byte transferred must be followed by an acknowledge (ACK) signal. The clock for the acknowledge signal is generated by the master, while the receiver generates the actual acknowledge signal by pulling down SDA and holding it low during the HIGH portion of the acknowledge clock pulse.

Communications

After beginning communications with the START condition (S), the master sends a 7-bit slave address followed by an 8th bit, the read/write bit. The read/write bit indicates whether the master is receiving data from or is writing to the slave device. Then, the master releases the SDA line and waits for the acknowledge signal (ACK) from the slave device. Each byte transferred must be followed by an acknowledge bit. To acknowledge, the slave device pulls the SDA line LOW and keeps it LOW for the high period of the SCL line. Data transmission is always terminated by the master with a STOP condition (P), thus freeing the communications line. However, the master can generate a repeated START condition (Sr), and address another slave without first generating a STOP condition (P). A LOW to HIGH transition on the SDA line while SCL is HIGH defines the stop condition. All SDA changes should take place when SCL is low, with the exception of start and stop conditions.

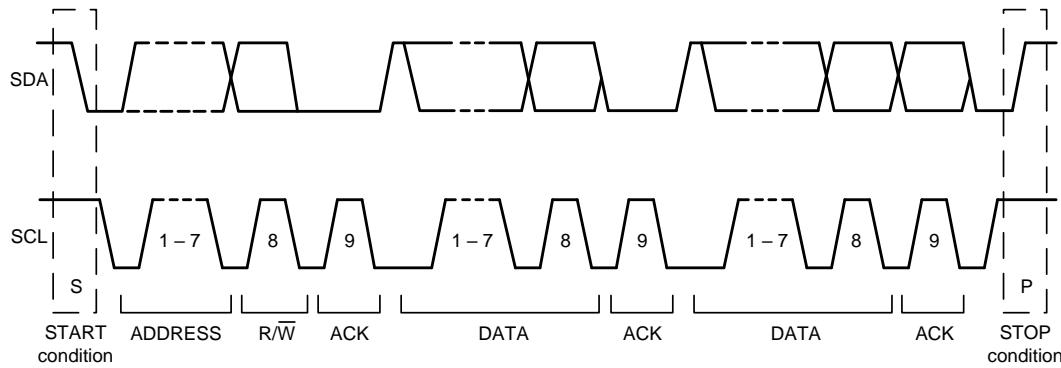Figure 13. Complete I²C Data Transfer

To write the internal IIM-42653 registers, the master transmits the start condition (S), followed by the I²C address and the write bit (0). At the 9th clock cycle (when the clock is high), the IIM-42653 acknowledges the transfer. Then the master puts the register address (RA) on the bus. After the IIM-42653 acknowledges the reception of the register address, the master puts the register data onto the bus. This is followed by the ACK signal, and data transfer may be concluded by the stop condition (P). To write multiple bytes after the last ACK signal, the master can continue outputting data rather than transmitting a stop signal. In this case, the IIM-42653 automatically increments the register address and loads the data to the appropriate register. The following figures show single- and two-byte write sequences.

Single-Byte Write Sequence

Master	S	AD+W		RA		DATA		P
Slave			ACK		ACK		ACK	

Burst Write Sequence

Master	S	AD+W		RA		DATA		DATA		P
Slave			ACK		ACK		ACK		ACK	

To read the internal IIM-42653 registers, the master sends a start condition, followed by the I²C address and a write bit, and then the register address that is going to be read. Upon receiving the ACK signal from the IIM-42653, the master transmits a start signal followed by the slave address and read bit. As a result, the IIM-42653 sends an ACK signal and the data. The communication ends with a not acknowledge (NACK) signal and a stop bit from master. The NACK condition is defined such that the SDA line remains high at the 9th clock cycle. The following figures show single and two-byte read sequences.

Single-Byte Read Sequence

Master	S	AD+W		RA		S	AD+R			NACK	P
Slave			ACK		ACK			ACK	DATA		

Burst Read Sequence

Master	S	AD+W		RA		S	AD+R			ACK		NACK	P
Slave			ACK		ACK			ACK	DATA		DATA		

9.5 I²C TERMS

SIGNAL	DESCRIPTION
S	Start Condition: SDA goes from high to low while SCL is high
AD	Slave I ² C address
W	Write bit (0)
R	Read bit (1)
ACK	Acknowledge: SDA line is low while the SCL line is high at the 9 th clock cycle
NACK	Not-Acknowledge: SDA line stays high at the 9 th clock cycle
RA	IIM-42653 internal register address
DATA	Transmit or received data
P	Stop condition: SDA going from low to high while SCL is high

Table 14. I²C Terms

9.6 SPI INTERFACE

The IIM-42653 supports 3-wire or 4-wire SPI for the host interface. The IIM-42653 always operates as a Slave device during standard Master-Slave SPI operation.

With respect to the Master, the Serial Clock output (SCLK), the Serial Data Output (SDO), the Serial Data Input (SDI), and the Serial Data IO (SDIO) are shared among the Slave devices. Each SPI slave device requires its own Chip Select (CS) line from the master.

CS goes low (active) at the start of transmission and goes back high (inactive) at the end. Only one CS line is active at a time, ensuring that only one slave is selected at any given time. The CS lines of the non-selected slave devices are held high, causing their SDO lines to remain in a high-impedance (high-z) state so that they do not interfere with any active devices.

SPI Operational Features

1. Data is delivered MSB first and LSB last
2. Data is latched on the rising edge of SCLK
3. Data should be transitioned on the falling edge of SCLK
4. The maximum frequency of SCLK is 24 MHz
5. SPI read operations are completed in 16 or more clock cycles (two or more bytes). The first byte contains the SPI Address, and the following byte(s) contain(s) the SPI data. The first bit of the first byte contains the Read/Write bit and indicates the Read (1) operation. The following 7 bits contain the Register Address. In cases of multiple-byte Reads, data is two or more bytes:

SPI Address format

MSB							LSB
R/W	A6	A5	A4	A3	A2	A1	A0

SPI Data format

MSB							LSB
D7	D6	D5	D4	D3	D2	D1	D0

6. SPI write operations are completed in 16 clock cycles (two bytes). The first byte contains the SPI Address, and the second byte contains the SPI data. The first bit of the first byte contains the Read/Write bit and indicates the Write (0) operation. The following 7 bits contain the Register Address.
7. Supports Single or Burst Reads and Single Writes.

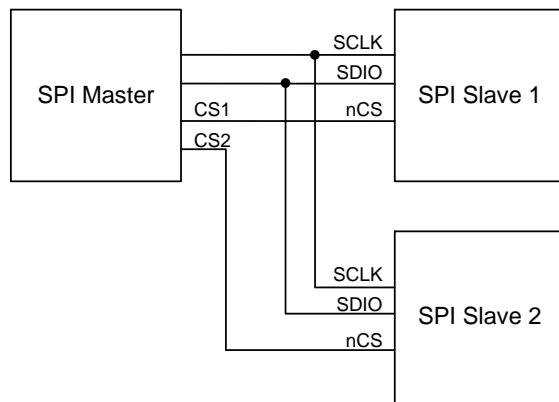


Figure 14. Typical SPI Master/Slave Configuration

10 ASSEMBLY

This section provides general guidelines for assembling InvenSense Micro Electro-Mechanical Systems (MEMS) devices packaged in LGA package.

10.1 ORIENTATION OF AXES

Figure 15 shows the orientation of the axes of sensitivity and the polarity of rotation. Note the pin 1 identifier (•) in the figure.




Figure 15. Orientation of Axes of Sensitivity and Polarity of Rotation

10.2 PACKAGE DIMENSIONS

14 Lead LGA (2.5x3x0.91) mm NiAu pad finish

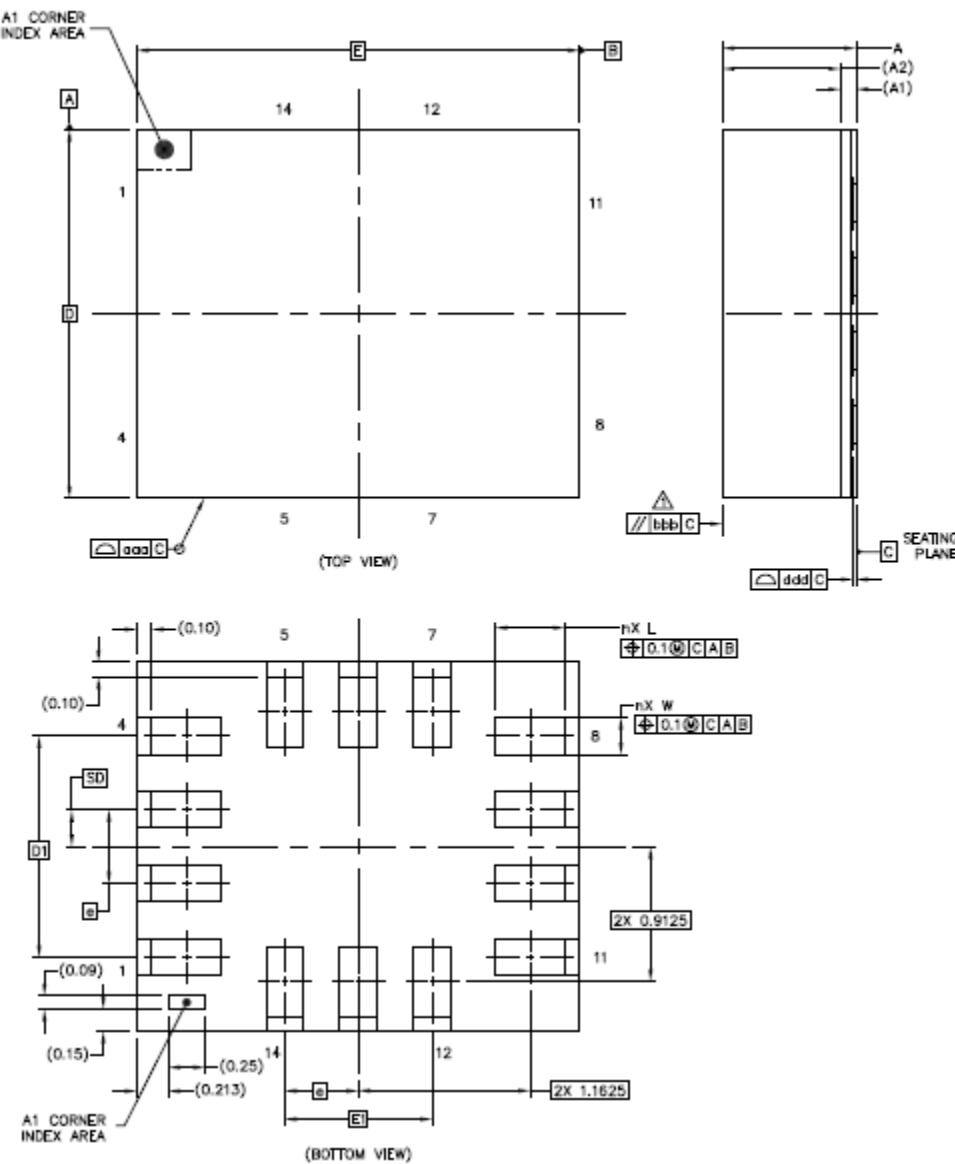


Figure 16. Package Dimensions

		DIMENSIONS IN MILLIMETERS		
	SYMBOLS	MIN	NOM	MAX
Total Thickness	A	0.85	0.91	0.97
Substrate Thickness	A1		0.105	REF
Mold Thickness	A2		0.8	REF
Body Size	D		2.5	BSC
	E		3	BSC
Lead Width	W	0.2	0.25	0.3
Lead Length	L	0.425	0.475	0.525
Lead Pitch	e		0.5	BSC
Lead Count	n		14	
Edge Pin Center to Center	D1		1.5	BSC
	E1		1	BSC
Body Center to Contact Pin	SD		0.25	BSC
Package Edge Tolerance	aaa		0.1	
Mold Flatness	bbb		0.2	
Coplanarity	ddd		0.08	

11 PART NUMBER PACKAGE MARKING

The part number package marking for IIM-42653 devices is summarized below:

PART NUMBER	PART NUMBER PACKAGE MARKING
IIM-42653	I4653

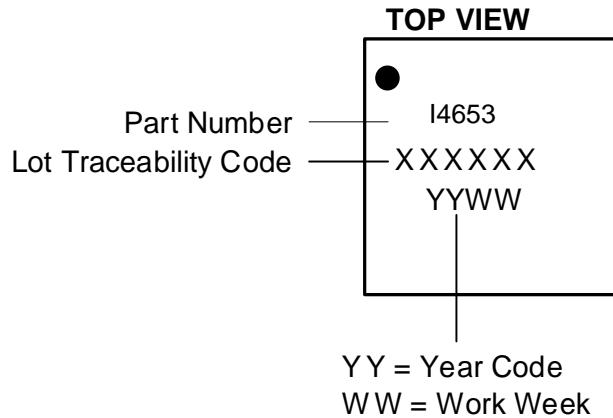


Figure 17. Part Number Package Marking

12 USE NOTES

12.1 ACCELEROMETER MODE TRANSITIONS

When transitioning from accelerometer Low Power (LP) mode to accelerometer Low Noise (LN) mode, if ODR is 6.25 Hz or lower, software should change ODR to a value of 12.5 Hz or higher, because accelerometer LN mode does not support ODR values below 12.5 Hz.

When transitioning from accelerometer LN mode to accelerometer LP mode, if ODR is greater than 500 Hz, software should change ODR to a value of 500 Hz or lower, because accelerometer LP mode does not support ODR values above 500 Hz.

12.2 ACCELEROMETER LOW POWER (LP) MODE AVERAGING FILTER SETTING

Software drivers provided with the device use Averaging Filter setting of 16x. This setting is recommended for meeting Android noise requirements in LP mode, and to minimize accelerometer offset variation when transitioning from LP to Low Noise (LN) mode. 1x averaging filter can be used by following the setting configuration shown in section **Error! Reference source not found..**

12.3 SETTINGS FOR I²C, I3CSM, AND SPI OPERATION

Upon bootup the device comes up in SPI mode. The following settings should be used for I²C, I3CSM, and SPI operation.

Scenario 1: INT1/INT2 pins are used for interrupt assertion in I3CSM mode.

REGISTER FIELD	I ² C Driver Setting	SPI Driver Setting
I3C_EN (bit 4, register INTF_CONFIG6, address 0x7C, bank 1)	1	1
I3C_SDR_EN (bit 0, register INTF_CONFIG6, address 0x7C, bank 1)	0	1
I3C_DDR_EN (bit 1, register INTF_CONFIG6, address 0x7C, bank 1)	0	1
I3C_BUS_MODE (bit 6, register INTF_CONFIG4, address 0x7A, bank 1)	0	0
I2C_SLEW_RATE (bits 5:3, register DRIVE_CONFIG, address 0x13, bank 0)	1	0
SPI_SLEW_RATE (bits 2:0, register DRIVE_CONFIG, address 0x13, bank 0)	1	5

Scenario 2: IBI is used for interrupt assertion in I3CSM mode.

REGISTER FIELD	I ² C Driver Setting	SPI Driver Setting
I3C_EN (bit 4, register INTF_CONFIG6, address 0x7C, bank 1)	1	1
I3C_SDR_EN (bit 0, register INTF_CONFIG6, address 0x7C, bank 1)	0	1
I3C_DDR_EN (bit 1, register INTF_CONFIG6, address 0x7C, bank 1)	0	1
I3C_BUS_MODE (bit 6, register INTF_CONFIG4, address 0x7A, bank 1)	0	0
I2C_SLEW_RATE (bits 5:3, register DRIVE_CONFIG, address 0x13, bank 0)	1	0
SPI_SLEW_RATE (bits 2:0, register DRIVE_CONFIG, address 0x13, bank 0)	1	5

12.4 NOTCH FILTER AND ANTI-ALIAS FILTER OPERATION

Use of Notch Filter and Anti-Alias Filter is supported only for Low Noise (LN) mode operation. The host is responsible for keeping the UI path in LN mode while Notch Filter and Anti-Alias Filter are turned on.

12.5 EXTERNAL CLOCK INPUT EFFECT ON ODR

ODR values supported by the device scale with external clock frequency, if external clock input is used. The ODR values shown in the datasheet are supported with external clock input frequency of 32 kHz. For any other external clock input frequency, these ODR values will scale by a factor of (External clock value in kHz / 32). For example, if an external clock frequency of 32.768 kHz is used, instead of ODR value of 500 Hz, it will be $500 * (32.768 / 32) = 512$ Hz.

12.6 INT_ASYNC_RESET CONFIGURATION

For register INT_CONFIG1 (bank 0 register 0x64) bit 4 INT_ASYNC_RESET, user should change setting to 0 from default setting of 1, for proper INT1 and INT2 pin operation.

12.7 FIFO TIMESTAMP INTERVAL SCALING

When RTC_MODE =1 (bank 0 register 0x4D bit2) and register INTF_CONFIG5 (bank 1 register 0x7B) bit 2:1 (PIN9_FUNCTION) is set to 10 for CLKIN input;

THEN

If TMST_RES = 0 (corresponding to timestamp resolution of 1 μ s), timestamp interval reported in FIFO requires scaling by a factor of 32.768/RTC Frequency.

For example, when ODR = 1 kHz, RTC Frequency 32 kHz, the true timestamp interval should be 1000 μ s. But the value in FIFO toggles between 976 and 977. After scaling $976.5 * 32.768/32 = 1000 \mu$ s.

If TMST_RES = 1 (corresponding to timestamp resolution of 1 RTC clock period), timestamp interval reported in FIFO requires scaling by a factor of RTC clock period.

For example, when ODR = 1 kHz, RTC Frequency 32 kHz, the true timestamp interval should be 1000 μ s. But the value in FIFO is 32. After scaling $1/32\text{kHz}*32 = 1000 \mu$ s.

ELSE

If TMST_RES = 0 (corresponding to timestamp resolution of 1 μ s), timestamp interval reported in FIFO requires scaling by a factor of 32/30.

For example, when ODR = 1 kHz, the true timestamp interval should be 1000 μ s. But the value in FIFO toggles between 937 and 938. After scaling $937.5 * 32/30 = 1000 \mu$ s.

If TMST_RES = 1 (corresponding to timestamp resolution of 16 μ s), timestamp interval reported in FIFO requires scaling by a factor of 16*32/30.

For example, when ODR = 1 kHz, the true timestamp interval should be 1000 μ s. But the value in FIFO toggles between 58 and 59. After scaling $58.5 * 16* 32/30 = 1000 \mu$ s.

12.8 SUPPLEMENTARY INFORMATION FOR FIFO_HOLD_LAST_DATA_EN

This section contains supplementary information for using register field FIFO_HOLD_LAST_DATA_EN (bit 7) of register INTF_CONFIG0 (address 0x4C, bank 0).

The following table shows the values in FIFO:

FIFO_HOLD_LAST_DATA_EN		16-BIT FIFO PACKET	20-BIT FIFO PACKET
0 (Insert Invalid code)	Valid sample	All values in: {-32766 to +32767}	Gyro: All Even numbers in {-524256 to +524286} Example: {-524256, -524254, -524252, -524250+524284, +524286} Accel: Every Other Even number in {-524256 to +524284} Example: {-524256, -524252, -524248, -524244+524280, +524284}
			-32768
1 ("copy last valid" mode: No invalid code insertion)	Valid sample	All values in: {-32768 to +32767}	Gyro: All Even numbers in {-524288 to +524286} Example: {-524288, -524286, -524284, -524282+524284, +524286 } Accel: Every Other Even number in {-524288 to +524284} Example: {-524288, -524284, -524280+524280, +524284}
			Copy last valid sample

The following table shows the values in sense registers on reset:

	FIFO_HOLD_LAST_DATA_EN = 0	FIFO_HOLD_LAST_DATA_EN = 1
Power On Reset till First Sample	Accel/Gyro/Temperature Sensor = -32768	Accel/Gyro/Temperature Sensor = 0

The following table shows the values in sense registers after first sample is received. As shown in the table, the combination of FIFO_HOLD_LAST_DATA_EN and FSYNC Tag determine the range of values read for valid samples and invalid samples.

FIFO_HOLD_LAST_DATA_EN		FSYNC tag disabled	FSYNC Enabled on one Sensor		
			Sensor selected for FSYNC Tag		Other Sensor Not selected for FSYNC tagging
0 (Insert Invalid code)	Valid sample	All values in: {-32766 to +32767}	FSYNC tagged	FSYNC not tagged	
		Registers do not receive invalid samples. Registers hold last valid sample until new one arrives	All ODD values in: {-32765 to +32767}	All EVEN values in: {-32766 to +32766}	All values in: {-32766 to +32767}
1 ("copy last valid" mode: No invalid code insertion)	Valid sample	All values in: {-32768 to +32767}	All ODD values in: {-32767 to +32767}	All EVEN values in: {-32768 to +32766}	All values in: {-32768 to +32767}
	Invalid sample	Registers do not receive invalid samples. Registers hold last valid sample until new one arrives			

12.9 REGISTER VALUES MODIFICATION

The only register settings that user can modify during sensor operation are for ODR selection, FSR selection, and sensor mode changes (register parameters GYRO_ODR, ACCEL_ODR, GYRO_FS_SEL, ACCEL_FS_SEL, GYRO_MODE, ACCEL_MODE). User must not modify any other register values during sensor operation. The following procedure must be used for other register values modification.

- Turn Accel and Gyro Off
- Modify register values
- Turn Accel and/or Gyro On

13 REGISTER MAP

This section lists the register map for the IIM-42653, for user banks 0, 1, 2, 3, 4.

13.1 USER BANK 0 REGISTER MAP

Addr (Hex)	Addr (Dec.)	Register Name	Serial I/F	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
01	01	S4S_ST	R/W	-	-	-	-	-	-	-	-
02	02	S4S_DT	R/W	ABORT	-	-	-	-	-	-	-
11	17	DEVICE_CONFIG	R/W	-	-	-	SPI_MODE	-	-	-	SOFT_RESET_CONFIG
13	19	DRIVE_CONFIG	R/W	-	-	-	I2C_SLEW_RATE	-	-	-	SPI_SLEW_RATE
14	20	INT_CONFIG		-	-	INT2_MODE	INT2_DRIVE_CIRCUIT	INT2_POLARITY	INT1_MODE	INT1_DRIVE_CIRCUIT	INT1_POLARITY
16	22	FIFO_CONFIG	R/W	FIFO_MODE	-	-	-	-	-	-	-
1D	29	TEMP_DATA1_UI	SYNCR	-	-	-	-	TEMP_DATA_UI[15:8]	-	-	-
1E	30	TEMP_DATA0_UI	SYNCR	-	-	-	-	TEMP_DATA_UI[7:0]	-	-	-
1F	31	ACCEL_DATA_X1_UI	SYNCR	-	-	-	-	ACCEL_DATA_X_UI[15:8]	-	-	-
20	32	ACCEL_DATA_X0_UI	SYNCR	-	-	-	-	ACCEL_DATA_X_UI[7:0]	-	-	-
21	33	ACCEL_DATA_Y1_UI	SYNCR	-	-	-	-	ACCEL_DATA_Y_UI[15:8]	-	-	-
22	34	ACCEL_DATA_Y0_UI	SYNCR	-	-	-	-	ACCEL_DATA_Y_UI[7:0]	-	-	-
23	35	ACCEL_DATA_Z1_UI	SYNCR	-	-	-	-	ACCEL_DATA_Z_UI[15:8]	-	-	-
24	36	ACCEL_DATA_Z0_UI	SYNCR	-	-	-	-	ACCEL_DATA_Z_UI[7:0]	-	-	-
25	37	GYRO_DATA_X1_UI	SYNCR	-	-	-	-	GYRO_DATA_X_UI[15:8]	-	-	-
26	38	GYRO_DATA_X0_UI	SYNCR	-	-	-	-	GYRO_DATA_X_UI[7:0]	-	-	-
27	39	GYRO_DATA_Y1_UI	SYNCR	-	-	-	-	GYRO_DATA_Y_UI[15:8]	-	-	-
28	40	GYRO_DATA_Y0_UI	SYNCR	-	-	-	-	GYRO_DATA_Y_UI[7:0]	-	-	-
29	41	GYRO_DATA_Z1_UI	SYNCR	-	-	-	-	GYRO_DATA_Z_UI[15:8]	-	-	-
2A	42	GYRO_DATA_Z0_UI	SYNCR	-	-	-	-	GYRO_DATA_Z_UI[7:0]	-	-	-
2B	43	TMST_FSYNC	SYNCR	-	-	-	-	TMST_FSYNC_DATA_UI[15:8]	-	-	-
2C	44	TMST_FSYNCL	SYNCR	-	-	-	-	TMST_FSYNC_DATA_UI[7:0]	-	-	-
2D	45	INT_STATUS	R/C	-	UI_FSYNC_IN_T	PLL_RDY_INT	RESET_DONE_INT	DATA_RDY_IN_T	FIFO_THS_IN_T	FIFO_FULL_IN_T	AGC_RDY_IN_T
2E	46	FIFO_COUNTH	R	-	-	-	-	-	FIFO_COUNT[15:8]	-	-
2F	47	FIFO_COUNTL	R	-	-	-	-	-	FIFO_COUNT[7:0]	-	-
30	48	FIFO_DATA	R	-	-	-	-	-	FIFO_DATA	-	-
31	49	APEX_DATA0	SYNCR	-	-	-	-	-	STEP_CNT[7:0] / FF_DUR[7:0]	-	-
32	50	APEX_DATA1	SYNCR	-	-	-	-	-	STEP_CNT[15:8] / FF_DUR[15:8]	-	-
33	51	APEX_DATA2	R	-	-	-	-	-	STEP_CADENCE	-	-
34	52	APEX_DATA3	R	-	-	-	-	-	DMP_IDLE	-	ACTIVITY_CLASS
35	53	APEX_DATA4	R	-	-	-	TAP_NUM	-	TAP_AXIS	-	TAP_DIR
36	54	APEX_DATA5	R	-	-	-	-	-	DOUBLE_TAP_TIMING	-	-
37	55	INT_STATUS2	R/C	-	-	-	-	SMD_INT	WOM_Z_INT	WOM_Y_INT	WOM_X_INT
38	56	INT_STATUS3	R/C	-	-	STEP_DET_IN_T	STEP_CNT_OVF_INT	TIILT_DET_IN_T	WAKE_INT	SLEEP_INT	TAP_DET_INT
4B	75	SIGNAL_PATH_RESET	W/C	-	DMP_INIT_EN	DMP_MEM_RESET_EN	S4S_RESTART	ABORT_AND_RESET	TMST_STROBE	FIFO_FLUSH	-
4C	76	INTF_CONFIG0	R/W	FIFO_HOLD_LAST_DATA_EN	FIFO_COUNT_REC	FIFO_COUNT_ENDIAN	SENSOR_DATA_ENDIAN	-	SPI_MODE_AXI1	-	UI_SIFS_CFG
4D	77	INTF_CONFIG1	R/W	-	-	-	-	ACCEL_LP_CLK_SEL	RTC_MODE	-	CLKSEL
4E	78	PWR_MGMT0	R/W	-	S4S_ENABLE	TEMP_DIS	IDLE	-	GYRO_MODE	-	ACCEL_MODE
4F	79	GYRO_CONFIG0	R/W	-	GYRO_UI_FS_SEL	-	-	-	-	-	GYRO_ODR
50	80	ACCEL_CONFIG0	R/W	-	ACCEL_UI_FS_SEL	-	-	-	-	-	ACCEL_ODR
51	81	GYRO_CONFIG1	R/W	-	TEMP_filt_BW	-	-	GYRO_UI_filt_ORD	-	GYRO_DEC2_M2_ORD	-

Addr (Hex)	Addr (Dec.)	Register Name	Serial I/F	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0				
52	82	GYRO_ACCEL_CONFIG0	R/W	ACCEL_UI_FILT_BW				GYRO_UI_FILT_BW							
53	83	ACCEL_CONFIG1	R/W	-			ACCEL_UI_FILT_ORD		ACCEL_DEC2_M2_ORD	-					
54	84	TMST_CONFIG	R/W	-			TMST_TO_RE GS_EN	TMST_RES	TMST_DELTA EN	TMST_FSYNC EN	TMST_EN				
56	86	APEX_CONFIG0	R/W	DMP_POWE R_SAVE	TAP_ENABLE	PED_ENABLE	TIILT_ENABLE	-	FF_ENABLE	DMP_ODR					
57	87	SMD_CONFIG	R/W	-				WOM_INT_MODE	WOM_MODE	SMD_MODE					
5F	95	FIFO_CONFIG1	R/W	-	FIFO_RESUM E_PARTIAL_R D	FIFO_WM_G T_TH	FIFO_HIRES EN	FIFO_TMST_F SYNC_EN	FIFO_TEMP EN	FIFO_GYRO EN	FIFO_ACCEL EN				
60	96	FIFO_CONFIG2	R/W	FIFO_WM[7:0]											
61	97	FIFO_CONFIG3	R/W	-				FIFO_WM[11:8]							
62	98	FSYNC_CONFIG	R/W	-	FSYNC_UI_SEL			-	FSYNC_AUX1 _FLAG_CLEA R_SEL	FSYNC_UI_FL AG_CLEAR_S EL	FSYNC_POLA RITY				
63	99	INT_CONFIG0	R/W	-		UI_DRDY_INT_CLEAR		FIFO_THS_INT_CLEAR		FIFO_FULL_INT_CLEAR					
64	100	INT_CONFIG1	R/W	-	INT_TPULSE _DURATION	INT_TDEASSE RT_DISABLE	INT_ASYNC _RESET	-		AUX1_DRDY_INT_CLEAR					
65	101	INT_SOURCE0	R/W	-	UI_FSYNC_IN T1_EN	PLL_RDY_INT 1_EN	RESET_DONE _INT1_EN	UI_DRDY_INT 1_EN	FIFO_THS_IN T1_EN	FIFO_FULL_I NT1_EN	UI_AGC_RDY _INT1_EN				
66	102	INT_SOURCE1	R/W	-	I3C_PROTOC OL_ERROR_I NT1_EN	-		SMD_INT1_E N	WOM_Z_INT 1_EN	WOM_Y_INT 1_EN	WOM_X_INT 1_EN				
67	103	INT_SOURCE2	R/W	-				AUX1_AGC_R DY_INT1_EN		AUX1_FSYNC _INT1_EN	AUX1_DRDY _INT1_EN				
68	104	INT_SOURCE3	R/W	-	UI_FSYNC_IN T2_EN	PLL_RDY_INT 2_EN	RESET_DONE _INT2_EN	UI_DRDY_INT 2_EN	FIFO_THS_IN T2_EN	FIFO_FULL_I NT2_EN	UI_AGC_RDY _INT2_EN				
69	105	INT_SOURCE4	R/W	-	I3C_PROTOC OL_ERROR_I NT2_EN	-		SMD_INT2_E N	WOM_Z_INT 2_EN	WOM_Y_INT 2_EN	WOM_X_INT 2_EN				
6A	106	INT_SOURCE5	R/W	-				AUX1_AGC_R DY_INT2_EN		AUX1_FSYNC _INT2_EN	AUX1_DRDY _INT2_EN				
6C	108	FIFO_LOST_PKT0	R	FIFO_LOST_PKT_CNT[15:8]											
6D	109	FIFO_LOST_PKT1	R	FIFO_LOST_PKT_CNT[7:0]											
70	112	SELF_TEST_CONFIG	R/W		ACCEL_ST_P OWER	EN_AZ_ST	EN_AY_ST	EN_AX_ST	EN_GZ_ST	EN_GY_ST	EN_GX_ST				
75	117	WHO_AM_I	R	WHOAMI											
76	118	REG_BANK_SEL	R/W	-				BANK_SEL							

13.2 USER BANK 1 REGISTER MAP

Addr (Hex)	Addr (Dec.)	Register Name	Serial I/F	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0				
03	03	SENSOR_CONFIG0	R/W	-	ZG_DISABLE	YG_DISABLE	XG_DISABLE	ZA_DISABLE	YA_DISABLE	XA_DISABLE					
0B	11	GYRO_CONFIG_STATIC2	R/W	-						GYRO_AAF_D IS	GYRO_NF_DI S				
0C	12	GYRO_CONFIG_STATIC3	R/W	-	GYRO_AAF_DELT										
0D	13	GYRO_CONFIG_STATIC4	R/W	GYRO_AAF_DELTSQR[7:0]											
0E	14	GYRO_CONFIG_STATIC5	R/W	GYRO_AAF_BITSHIFT				GYRO_AAF_DELTCSR[11:8]							
0F	15	GYRO_CONFIG_STATIC6	R/W	GYRO_X_NF_COSWZ[7:0]											
10	16	GYRO_CONFIG_STATIC7	R/W	GYRO_Y_NF_COSWZ[7:0]											
11	17	GYRO_CONFIG_STATIC8	R/W	GYRO_Z_NF_COSWZ[7:0]											
12	18	GYRO_CONFIG_STATIC9	R/W	-	GYRO_Z_NF_COSWZ_SEL[0]	GYRO_Y_NF_COSWZ_SEL[0]	GYRO_X_NF_COSWZ_SEL[0]	GYRO_Z_NF_COSWZ[8]	GYRO_Y_NF_COSWZ[8]	GYRO_X_NF_COSWZ[8]					
13	19	GYRO_CONFIG_STATIC10	R/W	-	GYRO_NF_BW_SEL			GYRO_HPF_BW_IND			GYRO_HPF_O RD_IND				
5F	95	XG_ST_DATA	R/W	XG_ST_DATA											

Addr (Hex)	Addr (Dec.)	Register Name	Serial I/F	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
60	96	YG_ST_DATA	R/W	YG_ST_DATA							
61	97	ZG_ST_DATA	R/W	ZG_ST_DATA							
62	98	TMSTVAL0	R	TMST_VALUE[7:0]							
63	99	TMSTVAL1	R	TMST_VALUE[15:8]							
64	100	TMSTVAL2	R	-				TMST_VALUE[19:16]			
7A	122	INTF_CONFIG4	R/W	-	I3C_BUS_MODE	-				SPI_AP_4WIRE	-
7B	123	INTF_CONFIG5	R/W	-						PIN9_FUNCTION	-
7C	124	INTF_CONFIG6	R/W	ASYNCTIMEO_DIS	-	I3C_EN	I3C_IBI_BYTE_EN	I3C_IBI_EN	I3C_DDR_EN	I3C_SDR_EN	

13.3 USER BANK 2 REGISTER MAP

Addr (Hex)	Addr (Dec.)	Register Name	Serial I/F	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0			
03	03	ACCEL_CONFIG_STATIC2	R/W	-	ACCEL_AAF_DELT						ACCEL_AAF_DIS			
04	04	ACCEL_CONFIG_STATIC3	R/W	ACCEL_AAF_DELTSQR[7:0]										
05	05	ACCEL_CONFIG_STATIC4	R/W	ACCEL_AAF_BITSHIFT				ACCEL_AAF_DELTSQR[11:8]						
3B	59	XA_ST_DATA	R/W	XA_ST_DATA										
3C	60	YA_ST_DATA	R/W	YA_ST_DATA										
3D	61	ZA_ST_DATA	R/W	ZA_ST_DATA										
44	68	AUX1_CONFIG1	R/W	-	AUX1_ACCEL_LP_CLK_SEL	AUX1_ODR				GYRO_AUX1_EN	ACCEL_AUX1_EN			
45	69	AUX1_CONFIG2	R/W	-	GYRO_AUX1_HPF_DIS	GYRO_AUX1_FS_SEL				ACCEL_AUX1_FS_SEL				
46	70	AUX1_CONFIG3	R/W	-			FSYNC_AUX1_SEL			GYRO_HPF_AX1_AUTOZERO	GYRO_HPF_AX1_RESET			
47	71	TEMP_DATA1_AUX1	SYNCR	TEMP_DATA_AUX1[15:8]										
48	72	TEMP_DATA0_AUX1	SYNCR	TEMP_DATA_AUX1[7:0]										
49	73	ACCEL_DATA_X1_AUX1	SYNCR	ACCEL_DATA_X_AUX1[15:8]										
4A	74	ACCEL_DATA_X0_AUX1	SYNCR	ACCEL_DATA_X_AUX1[7:0]										
4B	75	ACCEL_DATA_Y1_AUX1	SYNCR	ACCEL_DATA_Y_AUX1[15:8]										
4C	76	ACCEL_DATA_Y0_AUX1	SYNCR	ACCEL_DATA_Y_AUX1[7:0]										
4D	77	ACCEL_DATA_Z1_AUX1	SYNCR	ACCEL_DATA_Z_AUX1[15:8]										
4E	78	ACCEL_DATA_Z0_AUX1	SYNCR	ACCEL_DATA_Z_AUX1[7:0]										
4F	79	GYRO_DATA_X1_AUX1	SYNCR	GYRO_DATA_X_AUX1[15:8]										
50	80	GYRO_DATA_X0_AUX1	SYNCR	GYRO_DATA_X_AUX1[7:0]										
51	81	GYRO_DATA_Y1_AUX1	SYNCR	GYRO_DATA_Y_AUX1[15:8]										
52	82	GYRO_DATA_Y0_AUX1	SYNCR	GYRO_DATA_Y_AUX1[7:0]										
53	83	GYRO_DATA_Z1_AUX1	SYNCR	GYRO_DATA_Z_AUX1[15:8]										
54	84	GYRO_DATA_Z0_AUX1	SYNCR	GYRO_DATA_Z_AUX1[7:0]										
55	85	TMSTVAL0_AUX1	SYNCR	TMST_FSYNC_DATA_AUX1[7:0]										
56	86	TMSTVAL1_AUX1	SYNCR	TMST_FSYNC_DATA_AUX1[15:8]										
57	87	INT_STATUS_AUX1	R/C	-				FSYNC_AUX1_INT	DATA_RDY_AX1_INT	AGC_RDY_AX1_INT				
71	113	AUX1_SPI_REG1	R/W	-				AUX1_SPI_REG1						
72	114	AUX1_SPI_REG2	R/W	-				AUX1_SPI_REG2						
73	115	AUX1_SPI_REG3	R/W	-				AUX1_SPI_REG3						

13.4 USER BANK 3 REGISTER MAP

Addr (Hex)	Addr (Dec.)	Register Name	Serial I/F	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
77	119	S4S_CONFIG	R/W	-		S4S_SENSOR_SELECT	S4S_FREQ_A DJ_DEL_DIS		S4S_PHASE_CORR_DECIM		
7B	123	S4S_GYRO_TPH1	R/W				S4S_GYRO_TPH1				
7C	124	S4S_GYRO_TPH2	R/W				S4S_GYRO_TPH2				
7D	125	S4S_ACCEL_TPH1	R/W				S4S_ACCEL_TPH1				
7E	126	S4S_ACCEL_TPH2	R/W				S4S_ACCEL_TPH2				
7F	127	S4S_RR	R/W			-			S4S_RR		

13.5 USER BANK 4 REGISTER MAP

Addr (Hex)	Addr (Dec.)	Register Name	Serial I/F	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
09	9	FDR_CONFIG	R/W	-				FDR_SEL			
40	64	APEX_CONFIG1	R/W		LOW_ENERGY_AMP_TH_SEL			DMP_POWER_SAVE_TIME_SEL			
41	65	APEX_CONFIG2	R/W		PED_AMP_TH_SEL			PED_STEP_CNT_TH_SEL			
42	66	APEX_CONFIG3	R/W		PED_STEP_DET_TH_SEL		PED_SB_TIMER_TH_SEL		PED_HI_EN_TH_SEL		
43	67	APEX_CONFIG4	R/W	TILT_WAIT_TIME_SEL		LOWG_PEAK_TH_HYST_SEL		HIGHG_PEAK_TH_HYST_SEL			
44	68	APEX_CONFIG5	R/W		LOWG_PEAK_TH_SEL			LOWG_TIME_TH_SEL			
45	69	APEX_CONFIG6	R/W		HIGHG_PEAK_TH_SEL			HIGHG_TIME_TH_SEL			
46	70	APEX_CONFIG7	R/W			TAP_MIN_JERK_THR			TAP_MAX_PEAK_TOL		
47	71	APEX_CONFIG8	R/W	-	TAP_TMAX		TAP_TAVG		TAP Tmin		
48	72	APEX_CONFIG9	R/W								SENSITIVITY_MODE
49	73	APEX_CONFIG10	R/W		FF_MIN_DURATION_CM		FF_MAX_DURATION_CM		FF_DEBOUNCE_DURATION		
4A	74	ACCEL_WOM_X_THR	R/W				WOM_X_TH				
4B	75	ACCEL_WOM_Y_THR	R/W				WOM_Y_TH				
4C	76	ACCEL_WOM_Z_THR	R/W				WOM_Z_TH				
4D	77	INT_SOURCE6	R/W	-	STEP_DET_IN T1_EN	STEP_CNT_O FL_INT1_EN	TILT_DET_IN T1_EN	WAKE_DET_I NT1_EN	SLEEP_DET_I NT1_EN	TAP_DET_INT 1_EN	
4E	78	INT_SOURCE7	R/W	-	STEP_DET_IN T2_EN	STEP_CNT_O FL_INT2_EN	TILT_DET_IN T2_EN	WAKE_DET_I NT2_EN	SLEEP_DET_I NT2_EN	TAP_DET_INT 2_EN	
4F	79	INT_SOURCE8	R/W	-	AUX1_DRDY_IBI_EN	FSYNC_IBI_E N	PLL_RDY_IBI_EN	UI_DRDY_IBI_EN	FIFO_THS_IBI_EN	FIFO_FULL_IBI_EN	AGC_RDY_IBI_EN
50	80	INT_SOURCE9	R/W	I3C_PROTOCO L_ERROR_I BI_EN	-	SMD_IBI_EN	WOM_Z_IBI_EN	WOM_Y_IBI_EN	WOM_X_IBI_EN		-
51	81	INT_SOURCE10	R/W	-	STEP_DET_IBI_EN	STEP_CNT_O FL_IBI_EN	TILT_DET_IBI_EN	WAKE_DET_I BI_EN	SLEEP_DET_I BI_EN	TAP_DET_IBI_EN	
52	82	INTF_CONFIG10	R/W	-		I3C_DDR_WR_MODE	I3C_IGNORE_SO				
53	83	INTF_COMM_ERR	R/C	-	I3C_SO_ERR	I3C_CCC_PAR ITY_ERR	I3C_SDR_PAR ITY_ERR	I3C_DDR_PA RITY_ERR	I3C_DDR_FR AMING_ERR	I3C_CRC_ERR	
77	119	OFFSET_USER0	R/W				GYRO_X_OFFUSER[7:0]				
78	120	OFFSET_USER1	R/W		GYRO_Y_OFFUSER[11:8]			GYRO_X_OFFUSER[11:8]			
79	121	OFFSET_USER2	R/W				GYRO_Y_OFFUSER[7:0]				
7A	122	OFFSET_USER3	R/W				GYRO_Z_OFFUSER[7:0]				
7B	123	OFFSET_USER4	R/W		ACCEL_X_OFFUSER[11:8]			GYRO_Z_OFFUSER[11:8]			
7C	124	OFFSET_USER5	R/W				ACCEL_X_OFFUSER[7:0]				
7D	125	OFFSET_USER6	R/W				ACCEL_Y_OFFUSER[7:0]				
7E	126	OFFSET_USER7	R/W		ACCEL_Z_OFFUSER[11:8]			ACCEL_Y_OFFUSER[11:8]			
7F	127	OFFSET_USER8	R/W				ACCEL_Z_OFFUSER[7:0]				

Detailed register descriptions are provided in the sections that follow. Please note the following regarding Clock Domain for each register:

- Clock Domain: SCLK_UI means that the register is controlled from the UI interface
- Clock Domain: SCLK_AUX1 means that the register is controlled from the AUX1 interface
- Clock Domain: ALL means that the register is controlled from the UI, or AUX1 interface

Register fields marked as Reserved must not be modified by the user. The Reset Value of the register can be used to determine the default value of reserved register fields, and unless otherwise noted this default value must be maintained even if the values of other register fields are modified by the user.

14 USER BANK 0 REGISTER MAP – DESCRIPTIONS

This section describes the function and contents of each register within USR Bank 0.

Note: The device powers up in sleep mode.

14.1 S4S_ST

Note: This register is accessible from all register banks

Name: S4S_ST		
Address: 01 (01h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
-	-	The ST command can be issued as a normal write transaction when using SPI or I2C protocol. Register S4S_ST is used for this purpose, write access in SPI or I2C to S4S_ST generates S4S ST command. The data byte of the write transaction can be omitted, even if it is provided its value is ignored.

14.2 S4S_DT

Note: This register is accessible from all register banks

Name: S4S_DT		
Address: 02 (02h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7	ABORT	0: DT field is valid. 1: Sync procedure not applied on at this time (abort command)
6:0	DT_TIME	S4S DT delay time expressed in S4S resolution time units.

14.3 DEVICE_CONFIG

Name: DEVICE_CONFIG		
Address: 17 (11h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	-	Reserved
4	SPI_MODE	SPI mode selection 0: Mode 0 and Mode 3 (default) 1: Mode 1 and Mode 2
3:1	-	Reserved
0	SOFT_RESET_CONFIG	Software reset configuration 0: Normal (default) 1: Enable reset After writing 1 to this bitfield, wait 1ms for soft reset to be effective, before attempting any other register access

14.4 DRIVE_CONFIG

Name: DRIVE_CONFIG Address: 19 (13h) Serial IF: R/W Reset value: 0x05 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:6	-	Reserved
5:3	I2C_SLEW_RATE	Controls slew rate for output pin 14 in I ² C mode only 000: 20ns-60ns 001: 12ns-36ns 010: 6ns-18ns 011: 4ns-12ns 100: 2ns-6ns 101: < 2ns 110: Reserved 111: Reserved
2:0	SPI_SLEW_RATE	Controls slew rate for output pin 14 in SPI or I3C SM mode, and for all other output pins 000: 20ns-60ns 001: 12ns-36ns 010: 6ns-18ns 011: 4ns-12ns 100: 2ns-6ns 101: < 2ns 110: Reserved 111: Reserved

14.5 INT_CONFIG

Name: INT_CONFIG Address: 20 (14h) Serial IF: R/W Reset value: 0x00 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:6	-	Reserved
5	INT2_MODE	INT2 interrupt mode 0: Pulsed mode 1: Latched mode
4	INT2_DRIVE_CIRCUIT	INT2 drive circuit 0: Open drain 1: Push pull
3	INT2_POLARITY	INT2 interrupt polarity 0: Active low (default) 1: Active high
2	INT1_MODE	INT1 interrupt mode 0: Pulsed mode 1: Latched mode
1	INT1_DRIVE_CIRCUIT	INT1 drive circuit 0: Open drain

		1: Push pull
0	INT1_POLARITY	INT1 interrupt polarity 0: Active low (default) 1: Active high

14.6 FIFO_CONFIG

Name: FIFO_CONFIG

Address: 22 (16h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:6	FIFO_MODE	00: Bypass Mode (default) 01: Stream-to-FIFO Mode 10: STOP-on-FULL Mode 11: STOP-on-FULL Mode
5:0	-	Reserved

14.7 TEMP_DATA1_UI

Name: TEMP_DATA1_UI

Address: 29 (1Dh)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	TEMP_DATA_UI[15:8]	Upper byte of temperature data for UI path

14.8 TEMP_DATA0_UI

Name: TEMP_DATA0_UI

Address: 30 (1Eh)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	TEMP_DATA_UI[7:0]	Lower byte of temperature data for UI path

Temperature data value from the sensor data registers can be converted to degrees centigrade by using the following formula:

$$\text{Temperature in Degrees Centigrade} = (\text{TEMP_DATA} / 132.48) + 25$$

Temperature data stored in FIFO is an 8-bit quantity, FIFO_TEMP_DATA. It can be converted to degrees centigrade by using the following formula:

$$\text{Temperature in Degrees Centigrade} = (\text{FIFO_TEMP_DATA} / 2.07) + 25$$

14.9 ACCEL_DATA_X1_UI

Name: ACCEL_DATA_X1_UI

Address: 31 (1Fh)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_X_UI[15:8]	Upper byte of Accel X-axis data for UI path

14.10 ACCEL_DATA_X0_UI

Name: ACCEL_DATA_X0_UI

Address: 32 (20h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_X_UI[7:0]	Lower byte of Accel X-axis data for UI path

14.11 ACCEL_DATA_Y1_UI

Name: ACCEL_DATA_Y1_UI

Address: 33 (21h)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Y_UI[15:8]	Upper byte of Accel Y-axis data for UI path

14.12 ACCEL_DATA_Y0_UI

Name: ACCEL_DATA_Y0_UI

Address: 34 (22h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Y_UI[7:0]	Lower byte of Accel Y-axis data for UI path

14.13 ACCEL_DATA_Z1_UI

Name: ACCEL_DATA_Z1_UI

Address: 35 (23h)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Z_UI[15:8]	Upper byte of Accel Z-axis data for UI path

14.14 ACCEL_DATA_Z0_UI

Name: ACCEL_DATA_Z0_UI
Address: 36 (24h)
Serial IF: SYNCR
Reset value: 0x00
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Z_UI[7:0]	Lower byte of Accel Z-axis data for UI path

14.15 GYRO_DATA_X1_UI

Name: GYRO_DATA_X1_UI
Address: 37 (25h)
Serial IF: SYNCR
Reset value: 0x80
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_DATA_X_UI[15:8]	Upper byte of Gyro X-axis data for UI path

14.16 GYRO_DATA_X0_UI

Name: GYRO_DATA_X0_UI
Address: 38 (26h)
Serial IF: SYNCR
Reset value: 0x00
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_DATA_X_UI[7:0]	Lower byte of Gyro X-axis data for UI path

14.17 GYRO_DATA_Y1_UI

Name: GYRO_DATA_Y1_UI
Address: 39 (27h)
Serial IF: SYNCR
Reset value: 0x80
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Y_UI[15:8]	Upper byte of Gyro Y-axis data for UI path

14.18 GYRO_DATA_Y0_UI

Name: GYRO_DATA_Y0_UI
Address: 40 (28h)
Serial IF: SYNCR
Reset value: 0x00
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Y_UI[7:0]	Lower byte of Gyro Y-axis data for UI path

14.19 GYRO_DATA_Z1_UI

Name: GYRO_DATA_Z1_UI

Address: 41 (29h)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Z_UI[15:8]	Upper byte of Gyro Z-axis data for UI path

14.20 GYRO_DATA_Z0_UI

Name: GYRO_DATA_Z0_UI

Address: 42 (2Ah)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Z_UI[7:0]	Lower byte of Gyro Z-axis data for UI path

14.21 TMST_FSYNCH

Name: TMST_FSYNCH

Address: 43 (2Bh)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	TMST_FSYNC_DATA_UI[15:8]	Stores the upper byte of the time delta from the rising edge of FSYNC to the latest ODR until the UI Interface reads the FSYNC tag in the status register

14.22 TMST_FSYNCL

Name: TMST_FSYNCL

Address: 44 (2Ch)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	TMST_FSYNC_DATA_UI[7:0]	Stores the lower byte of the time delta from the rising edge of FSYNC to the latest ODR until the UI Interface reads the FSYNC tag in the status register

14.23 INT_STATUS

Name:	INT_STATUS	
Address:	45 (2Dh)	
Serial IF:	R/C	
Reset value:	0x10	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	-	Reserved
6	UI_FSYNC_INT	This bit automatically sets to 1 when a UI FSYNC interrupt is generated. The bit clears to 0 after the register has been read.
5	PLL_RDY_INT	This bit automatically sets to 1 when a PLL Ready interrupt is generated. The bit clears to 0 after the register has been read.
4	RESET_DONE_INT	This bit automatically sets to 1 when software reset is complete. The bit clears to 0 after the register has been read.
3	DATA_RDY_INT	This bit automatically sets to 1 when a Data Ready interrupt is generated. The bit clears to 0 after the register has been read.
2	FIFO_THS_INT	This bit automatically sets to 1 when the FIFO buffer reaches the threshold value. The bit clears to 0 after the register has been read.
1	FIFO_FULL_INT	This bit automatically sets to 1 when the FIFO buffer is full. The bit clears to 0 after the register has been read.
0	AGC_RDY_INT	This bit automatically sets to 1 when an AGC Ready interrupt is generated. The bit clears to 0 after the register has been read.

14.24 FIFO_COUNTH

Name:	FIFO_COUNTH	
Address:	46 (2Eh)	
Serial IF:	R	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	FIFO_COUNT[15:8]	High Bits, count indicates the number of written bytes in the FIFO. Note: Must read FIFO_COUNTL to latch new data for both FIFO_COUNTH and FIFO_COUNTL.

14.25 FIFO_COUNTL

Name:	FIFO_COUNTL	
Address:	47 (2Fh)	
Serial IF:	R	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	FIFO_COUNT[7:0]	Low Bits, count indicates the number of written bytes in the FIFO. Reading this byte latches the data for both FIFO_COUNTH, and FIFO_COUNTL.

14.26 FIFO_DATA

Name: FIFO_DATA
Address: 48 (30h)
Serial IF: R
Reset value: 0xFF
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	FIFO_DATA	FIFO data port

14.27 APEX_DATA0

Name: APEX_DATA0
Address: 49 (31h)
Serial IF: SYNCR
Reset value: 0x00
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	STEP_CNT[7:0] (when Pedometer is enabled)	Pedometer Output: Lower byte of Step Count measured by pedometer
	FF_DUR[7:0] (when Freefall Detection is enabled)	Lower byte of Freefall Duration

14.28 APEX_DATA1

Name: APEX_DATA1
Address: 50 (32h)
Serial IF: SYNCR
Reset value: 0x00
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	STEP_CNT[15:8] (when Pedometer is enabled)	Pedometer Output: Upper byte of Step Count measured by pedometer
	FF_DUR[15:8] (when Freefall Detection is enabled)	Upper byte of Freefall Duration

14.29 APEX_DATA2

Name: APEX_DATA2
Address: 51 (33h)
Serial IF: R
Reset value: 0x00
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	STEP_CADENCE	Pedometer Output: Walk/run cadency in number of samples. Format is u6.2. e.g. At 50Hz ODR and 2Hz walk frequency, the cadency is 25 samples. The register will output 100.

14.30 APEX_DATA3

Name: APEX_DATA3

Address: 52 (34h)

Serial IF: R

Reset value: 0x04

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:3	-	Reserved
2	DMP_IDLE	0: Indicates DMP is running 1: Indicates DMP is idle
1:0	ACTIVITY_CLASS	Pedometer Output: Detected activity 00: Unknown 01: Walk 10: Run 11: Reserved

14.31 APEX_DATA4

Name: APEX_DATA4

Address: 53 (35h)

Serial IF: R

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:5	-	Reserved
4:3	TAP_NUM	Tap Detection Output: Number of taps in the current Tap event 00: No tap 01: Single tap 10: Double tap 11: Reserved
2:1	TAP_AXIS	Tap Detection Output: Represents the accelerometer axis on which tap energy is concentrated 00: X-axis 01: Y-axis 10: Z-axis 11: Reserved
0	TAP_DIR	Tap Detection Output: Polarity of tap pulse 0: Current accelerometer value – Previous accelerometer value is a positive value 1: Current accelerometer value – Previous accelerometer value is a negative value or zero

14.32 APEX_DATA5

Name: APEX_DATA5

Address: 54 (36h)

Serial IF: R

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:6	-	Reserved

		DOUBLE_TAP_TIMING measures the time interval between the two taps when double tap is detected. It counts every 16 accelerometer samples as one unit between the 2 tap pulses. Therefore, the value is related to the accelerometer ODR.
5:0	DOUBLE_TAP_TIMING	<p>Time in seconds = DOUBLE_TAP_TIMING * 16 / ODR</p> <p>For example, if the accelerometer ODR is 500 Hz, and the DOUBLE_TAP_TIMING register reading is 6, the time interval value is $6*16/500 = 0.192$ seconds.</p>

14.33 INT_STATUS2

Name: INT_STATUS2		
Address: 55 (37h)		
Serial IF: R/C		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:4	-	Reserved
3	SMD_INT	Significant Motion Detection Interrupt, clears on read
2	WOM_Z_INT	Wake on Motion Interrupt on Z-axis, clears on read
1	WOM_Y_INT	Wake on Motion Interrupt on Y-axis, clears on read
0	WOM_X_INT	Wake on Motion Interrupt on X-axis, clears on read

14.34 INT_STATUS3

Name: INT_STATUS3		
Address: 56 (38h)		
Serial IF: R/C		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:6	-	Reserved
5	STEP_DET_INT	Step Detection Interrupt, clears on read
4	STEP_CNT_OVF_INT	Step Count Overflow Interrupt, clears on read
3	TILT_DET_INT	Tilt Detection Interrupt, clears on read
2	WAKE_INT	Wake Event Interrupt, clears on read
1	SLEEP_INT	Sleep Event Interrupt, clears on read
0	TAP_DET_INT	Tap Detection Interrupt, clears on read

14.35 SIGNAL_PATH_RESET

Name:	SIGNAL_PATH_RESET	
Address:	75 (4Bh)	
Serial IF:	W/C	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	-	Reserved
6	DMP_INIT_EN	When this bit is set to 1, the DMP is enabled
5	DMP_MEM_RESET_EN	When this bit is set to 1, the DMP memory is reset
4	S4S_RESTART	When this bit is set to 1, S4S controller is reset from the default condition as out of POR
3	ABORT_AND_RESET	When this bit is set to 1, the signal path is reset by restarting the ODR counter and signal path controls
2	TMST_STROBE	When this bit is set to 1, the time stamp counter is latched into the time stamp register. This is a write on clear bit.
1	FIFO_FLUSH	When set to 1, FIFO will get flushed.
0	-	Reserved

14.36 INTF_CONFIG

Name:	INTF_CONFIG	
Address:	76 (4Ch)	
Serial IF:	R/W	
Reset value:	0x30	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	FIFO_HOLD_LAST_DATA_EN	<p>Setting 0 corresponds to the following:</p> <p>From Power on Reset till First Sample:</p> <ul style="list-style-type: none"> • FIFO Invalid Samples Values: Accel/Gyro: -32768; Temp Sensor: -128 • Sense Registers Invalid Samples Values: Accel/Gyro/Temp Sensor: -32768 <p>After first sample received:</p> <ul style="list-style-type: none"> • FIFO Invalid Samples Values: Accel/Gyro: -32768; Temp Sensor: Last valid sample • FIFO Valid Samples Values: Accel/Gyro range limited from -32766 to +32767 • Sense Registers Invalid Samples Values: Accel/Gyro/Temp Sensor: Last valid sample • Sense Registers Valid Samples Values: Accel/Gyro range limited from -32766 to +32767 <p>Setting 1 corresponds to the following:</p> <p>From Power on Reset till First Sample:</p>

		<ul style="list-style-type: none"> • FIFO Invalid Samples Values: Accel/Gyro/Temp Sensor: 0 • Sense Registers Invalid Samples Values: Accel/Gyro/Temp Sensor: 0 <p>After first sample received:</p> <ul style="list-style-type: none"> • FIFO Invalid Samples Values: Accel/Gyro/Temp Sensor: Last valid sample • FIFO Valid Samples Values: Accel/Gyro range from -32768 to +32767 • Sense Registers Invalid Samples Values: Accel/Gyro/Temp Sensor: Last valid sample • Sense Registers Valid Samples Values: Accel/Gyro range from -32768 to +32767
6	FIFO_COUNT_REC	0: FIFO count is reported in bytes 1: FIFO count is reported in records (1 record = 16 bytes for header + gyro + accel + temp sensor data + time stamp, or 8 bytes for header + gyro/accel + temp sensor data)
5	FIFO_COUNT_ENDIAN	0: FIFO count is reported in Little Endian format 1: FIFO count is reported in Big Endian format (default)
4	SENSOR_DATA_ENDIAN	0: Sensor data is reported in Little Endian format 1: Sensor data is reported in Big Endian format (default)
3	-	Reserved
2	SPI_MODE_AUX1	SPI mode selection for AUX1 0: Mode 0 and Mode 3 (default) 1: Mode 1 and Mode 2
1:0	UI_SIFS_CFG	0x: Reserved 10: Disable SPI 11: Disable I2C

Invalid Data Generation: FIFO/Sense Registers may contain invalid data under the following conditions:

- From power on reset to first ODR sample of any sensor (accel, gyro, temp sensor)
- When any sensor is disabled (accel, gyro, temp sensor)
- When accel and gyro are enabled with different ODRs. In this case, the sensor with lower ODR will generate invalid samples when it has no new data.

Invalid data can take special values of 0, -128, -32768 or can hold last valid sample received. For -32768 to be used as a flag for invalid accel/gyro samples, the valid accel/gyro sample range is limited in such case as well. Bit 7 of INTF_CONFIG0 controls what values invalid (and valid) samples can take as shown above.

14.37 INTF_CONFIG1

Name:	INTF_CONFIG1	
Address:	77 (4Dh)	
Serial IF:	R/W	
Reset value:	0x91	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:4	-	Reserved
3	ACCEL_LP_CLK_SEL	0: Accelerometer LP mode uses Wake Up oscillator clock (default) 1: Accelerometer LP mode uses RC oscillator clock
2	RTC_MODE	0: No input RTC clock is required 1: RTC clock input is required
1:0	CLKSEL	00: Always select internal RC oscillator 01: Select PLL when available, else select RC oscillator (default) 10: Reserved 11: Disable all clocks

14.38 PWR_MGMT0

Name:	PWR_MGMT0	
Address:	78 (4Eh)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	-	Reserved
6	S4S_ENABLE	0: S4S is disabled. Host will not be able to instruct slave to enter into synchronous timing control operation with I3C SETXTIME CCC command. 1: S4S is enabled.
5	TEMP_DIS	0: Temperature sensor is enabled (default) 1: Temperature sensor is disabled
4	IDLE	If this bit is set to 1, the RC oscillator is powered on even if Accel and Gyro are powered off. Nominally this bit is set to 0, so when Accel and Gyro are powered off, the chip will go to OFF state, since the RC oscillator will also be powered off
3:2	GYRO_MODE	00: Turns gyroscope off (default) 01: Places gyroscope in Standby Mode 10: Reserved 11: Places gyroscope in Low Noise (LN) Mode Gyroscope needs to be kept ON for a minimum of 45ms. When transitioning from OFF to any of the other modes, do not issue any register writes for 200µs.
1:0	ACCEL_MODE	00: Turns accelerometer off (default) 01: Turns accelerometer off 10: Places accelerometer in Low Power (LP) Mode 11: Places accelerometer in Low Noise (LN) Mode When transitioning from OFF to any of the other modes, do not issue any register writes for 200µs.

14.39 GYRO_CONFIG0

Name: GYRO_CONFIG0 Address: 79 (4Fh) Serial IF: R/W Reset value: 0x06 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	GYRO_UI_FS_SEL	Full scale select for gyroscope UI interface output 000: ±4000dps (default) 001: ±2000dps 010: ±1000dps 011: ±500dps 100: ±250dps 101: ±125dps 110: ±62.5dps 111: ±31.25dps
4	-	Reserved
3:0	GYRO_ODR	Gyroscope ODR selection for UI interface output 0000: Reserved 0001: 32kHz 0010: 16kHz 0011: 8kHz 0100: 4kHz 0101: 2kHz 0110: 1kHz (default) 0111: 200Hz 1000: 100Hz 1001: 50Hz 1010: 25Hz 1011: 12.5Hz 1100: Reserved 1101: Reserved 1110: Reserved 1111: 500Hz

14.40 ACCEL_CONFIG0

Name: ACCEL_CONFIG0 Address: 80 (50h) Serial IF: R/W Reset value: 0x06 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	ACCEL_UI_FS_SEL	Full scale select for accelerometer UI interface output 000: ±32g (default) 001: ±16g 010: ±8g 011: ±4g 100: Reserved 101: Reserved 110: Reserved 111: Reserved
4	-	Reserved
3:0	ACCEL_ODR	Accelerometer ODR selection for UI interface output 0000: Reserved 0001: 32kHz (LN mode) 0010: 16kHz (LN mode) 0011: 8kHz (LN mode) 0100: 4kHz (LN mode) 0101: 2kHz (LN mode) 0110: 1kHz (LN mode) (default) 0111: 200Hz (LP or LN mode) 1000: 100Hz (LP or LN mode) 1001: 50Hz (LP or LN mode) 1010: 25Hz (LP or LN mode) 1011: 12.5Hz (LP or LN mode) 1100: 6.25Hz (LP mode) 1101: 3.125Hz (LP mode) 1110: 1.5625Hz (LP mode) 1111: 500Hz (LP or LN mode)

14.41 GYRO_CONFIG1

Name: GYRO_CONFIG1 Address: 81 (51h) Serial IF: R/W Reset value: 0x16 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	TEMP_FILT_BW	Sets the bandwidth of the temperature signal DLPF 000: DLPF BW = 4000Hz; DLPF Latency = 0.125ms (default) 001: DLPF BW = 170Hz; DLPF Latency = 1ms 010: DLPF BW = 82Hz; DLPF Latency = 2ms 011: DLPF BW = 40Hz; DLPF Latency = 4ms 100: DLPF BW = 20Hz; DLPF Latency = 8ms 101: DLPF BW = 10Hz; DLPF Latency = 16ms 110: DLPF BW = 5Hz; DLPF Latency = 32ms 111: DLPF BW = 5Hz; DLPF Latency = 32ms
4	-	Reserved
3:2	GYRO_UI_FILT_ORD	Selects order of GYRO UI filter 00: 1 st Order 01: 2 nd Order 10: 3 rd Order 11: Reserved
1:0	GYRO_DEC2_M2_ORD	Selects order of GYRO DEC2_M2 Filter 00: Reserved 01: Reserved 10: 3 rd Order 11: Reserved

14.42 GYRO_ACCEL_CONFIG0

Name: GYRO_ACCEL_CONFIG0 Address: 82 (52h) Serial IF: R/W Reset value: 0x11 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:4	ACCEL_UI_filt_BW	<p>LN Mode: Bandwidth for Accel LPF 0 BW=ODR/2 1 BW=max(400Hz, ODR)/4 (default) 2 BW=max(400Hz, ODR)/5 3 BW=max(400Hz, ODR)/8 4 BW=max(400Hz, ODR)/10 5 BW=max(400Hz, ODR)/16 6 BW=max(400Hz, ODR)/20 7 BW=max(400Hz, ODR)/40 8 to 13: Reserved 14 Low Latency option: Trivial decimation @ ODR of Dec2 filter output. Dec2 runs at max(400Hz, ODR) 15 Low Latency option: Trivial decimation @ ODR of Dec2 filter output. Dec2 runs at max(200Hz, 8*ODR)</p> <p>LP Mode: 0 Reserved 1 1x AVG filter (default) 2 to 5 Reserved 6 16x AVG filter 7 to 15 Reserved</p>
3:0	GYRO_UI_filt_BW	<p>LN Mode: Bandwidth for Gyro LPF 0 BW=ODR/2 1 BW=max(400Hz, ODR)/4 (default) 2 BW=max(400Hz, ODR)/5 3 BW=max(400Hz, ODR)/8 4 BW=max(400Hz, ODR)/10 5 BW=max(400Hz, ODR)/16 6 BW=max(400Hz, ODR)/20 7 BW=max(400Hz, ODR)/40 8 to 13: Reserved 14 Low Latency option: Trivial decimation @ ODR of Dec2 filter output. Dec2 runs at max(400Hz, ODR) 15 Low Latency option: Trivial decimation @ ODR of Dec2 filter output. Dec2 runs at max(200Hz, 8*ODR)</p>

14.43 ACCEL_CONFIG1

Name: ACCEL_CONFIG1		
Address: 83 (53h)		
Serial IF: R/W		
Reset value: 0x0D		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	-	Reserved
4:3	ACCEL_UI_FILT_ORD	Selects order of ACCEL UI filter 00: 1 st Order 01: 2 nd Order 10: 3 rd Order 11: Reserved
2:1	ACCEL_DEC2_M2_ORD	Order of Accelerometer DEC2_M2 filter 00: Reserved 01: Reserved 10: 3 rd order 11: Reserved
0	-	Reserved

14.44 TMST_CONFIG

Name: TMST_CONFIG		
Address: 84 (54h)		
Serial IF: R/W		
Reset value: 0x23		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	-	Reserved
4	TMST_TO_REGS_EN	0: TMST_VALUE[19:0] read always returns 0s 1: TMST_VALUE[19:0] read returns timestamp value
3	TMST_RES	Time Stamp resolution: When set to 0 (default), time stamp resolution is 1 μs. When set to 1, resolution is 16μs
2	TMST_DELTA_EN	Time Stamp delta enable: When set to 1, the time stamp field contains the measurement of time since the last occurrence of ODR.
1	TMST_FSYNC_EN	Time Stamp register FSYNC enable (default). When set to 1, the contents of the Timestamp feature of FSYNC is enabled. The user also needs to select FIFO_TMST_FSYNC_EN in order to propagate the timestamp value to the FIFO.
0	TMST_EN	0: Time Stamp register disable 1: Time Stamp register enable (default)

14.45 APEX_CONFIGO

Name: APEX_CONFIGO Address: 86 (56h) Serial IF: R/W Reset value: 0x82 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7	DMP_POWER_SAVE	0: DMP power save mode not active 1: DMP power save mode active (default)
6	TAP_ENABLE	0: Tap Detection not enabled 1: Tap Detection enabled when accelerometer ODR is set to one of the ODR values supported by Tap Detection (200Hz, 500Hz, 1kHz)
5	PED_ENABLE	0: Pedometer not enabled 1: Pedometer enabled
4	TILT_ENABLE	0: Tilt Detection not enabled 1: Tilt Detection enabled
3	-	Reserved
2	FF_ENABLE	0: Freefall Detection not enabled 1: Freefall Detection enabled
1:0	DMP_ODR	00: 25Hz 01: 500Hz 10: 50Hz 11: 100Hz

14.46 SMD_CONFIG

Name: SMD_CONFIG Address: 87 (57h) Serial IF: R/W Reset value: 0x00 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:4	-	Reserved
3	WOM_INT_MODE	0: Set WoM interrupt on the OR of all enabled accelerometer thresholds 1: Set WoM interrupt on the AND of all enabled accelerometer threshold
2	WOM_MODE	0: Initial sample is stored. Future samples are compared to initial sample 1: Compare current sample to previous sample
1:0	SMD_MODE	00: SMD disabled 01: Reserved 10: SMD short (1 sec wait) An SMD event is detected when two WOM are detected 1 sec apart 11: SMD long (3 sec wait) An SMD event is detected when two WOM are detected 3 sec apart

14.47 FIFO_CONFIG1

Name: FIFO_CONFIG1

Address: 95 (5Fh)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7	-	Reserved
6	FIFO_RESUME_PARTIAL_RD	0: Partial FIFO read disabled, requires re-reading of the entire FIFO 1: FIFO read can be partial, and resume from last read point
5	FIFO_WM_GT_TH	Trigger FIFO watermark interrupt on every ODR (DMA write) if FIFO_COUNT ≥ FIFO_WM_TH
4	FIFO_HIRES_EN	0: Default setting; Sensor data have regular resolution 1: Sensor data in FIFO will have extended resolution enabling the 20 Bytes packet
3	FIFO_TMST_FSYNC_EN	Must be set to 1 for all FIFO use cases when FSYNC is used
2	FIFO_TEMP_EN	Enable temperature sensor packets to go to FIFO
1	FIFO_GYRO_EN	Enable gyroscope packets to go to FIFO
0	FIFO_ACCEL_EN	Enable accelerometer packets to go to FIFO

14.48 FIFO_CONFIG2

Name: FIFO_CONFIG2

Address: 96 (60h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	FIFO_WM[7:0]	Lower bits of FIFO watermark. Generate interrupt when the FIFO reaches or exceeds FIFO_WM size in bytes or records according to FIFO_COUNT_REC setting. Interrupt only fires once. This register should be set to non-zero value, before choosing this interrupt source.

14.49 FIFO_CONFIG3

Name: FIFO_CONFIG3

Address: 97 (61h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:4	-	Reserved
3:0	FIFO_WM[11:8]	Upper bits of FIFO watermark. Generate interrupt when the FIFO reaches or exceeds FIFO_WM size in bytes or records according to FIFO_COUNT_REC setting. Interrupt only fires once. This register should be set to non-zero value, before choosing this interrupt source.

Note: Do not set FIFO_WM to value 0.

14.50 FSYNC_CONFIG

Name: FSYNC_CONFIG Address: 98 (62h) Serial IF: R/W Reset value: 0x10 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7	-	Reserved
6:4	FSYNC_UI_SEL	000: Do not tag FSYNC flag 001: Tag FSYNC flag to TEMP_OUT LSB 010: Tag FSYNC flag to GYRO_XOUT LSB 011: Tag FSYNC flag to GYRO_YOUT LSB 100: Tag FSYNC flag to GYRO_ZOUT LSB 101: Tag FSYNC flag to ACCEL_XOUT LSB 110: Tag FSYNC flag to ACCEL_YOUT LSB 111: Tag FSYNC flag to ACCEL_ZOUT LSB
3	-	Reserved
2	FSYNC_AUX1_FLAG_CLEAR_SEL	0: FSYNC flag is cleared when AUX1 sensor register is updated 1: FSYNC flag is cleared when AUX1 interface reads the sensor register LSB of FSYNC tagged axis
1	FSYNC_UI_FLAG_CLEAR_SEL	0: FSYNC flag is cleared when UI sensor register is updated 1: FSYNC flag is cleared when UI interface reads the sensor register LSB of FSYNC tagged axis
0	FSYNC_POLARITY	0: Start from Rising edge of FSYNC pulse to measure FSYNC interval 1: Start from Falling edge of FSYNC pulse to measure FSYNC interval

14.51 INT_CONFIG

Name: INT_CONFIG Address: 99 (63h) Serial IF: R/W Reset value: 0x00 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:6	-	Reserved
5:4	UI_DRDY_INT_CLEAR	Data Ready Interrupt Clear Option (latched mode) 00: Clear on Status Bit Read (default) 01: Clear on Status Bit Read 10: Clear on Sensor Register Read 11: Clear on Status Bit Read AND on Sensor Register read
3:2	FIFO_THS_INT_CLEAR	FIFO Threshold Interrupt Clear Option (latched mode) 00: Clear on Status Bit Read (default) 01: Clear on Status Bit Read 10: Clear on FIFO data 1Byte Read 11: Clear on Status Bit Read AND on FIFO data 1 byte read
1:0	FIFO_FULL_INT_CLEAR	FIFO Full Interrupt Clear Option (latched mode) 00: Clear on Status Bit Read (default) 01: Clear on Status Bit Read 10: Clear on FIFO data 1Byte Read 11: Clear on Status Bit Read AND on FIFO data 1 byte read

14.52 INT_CONFIG1

Name: INT_CONFIG1 Address: 100 (64h) Serial IF: R/W Reset value: 0x10 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7	-	Reserved
6	INT_TPULSE_DURATION	Interrupt pulse duration 0: Interrupt pulse duration is 100µs. Use only if ODR < 4kHz. (Default) 1: Interrupt pulse duration is 8 µs. Required if ODR ≥ 4kHz, optional for ODR < 4kHz.
5	INT_TDEASSERT_DISABLE	Interrupt de-assertion duration 0: The interrupt de-assertion duration is set to a minimum of 100µs. Use only if ODR < 4kHz. (Default) 1: Disables de-assert duration. Required if ODR ≥ 4kHz, optional for ODR < 4kHz.
4	INT_ASYNC_RESET	User should change setting to 0 from default setting of 1, for proper INT1 and INT2 pin operation
3:2	-	Reserved
1:0	AUX1_DRDY_INT_CLEAR	Data Ready Interrupt Clear Option (latched mode) 00: Clear on Status Bit Read 01: Clear on Status Bit Read 10: Clear on FIFO data 1Byte Read 11: Clear on Status Bit Read AND on FIFO data 1 byte read

14.53 INT_SOURCE0

Name: INT_SOURCE0 Address: 101 (65h) Serial IF: R/W Reset value: 0x10 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7	-	Reserved
6	UI_FSYNC_INT1_EN	0: UI FSYNC interrupt not routed to INT1 1: UI FSYNC interrupt routed to INT1
5	PLL_RDY_INT1_EN	0: PLL ready interrupt not routed to INT1 1: PLL ready interrupt routed to INT1
4	RESET_DONE_INT1_EN	0: Reset done interrupt not routed to INT1 1: Reset done interrupt routed to INT1
3	UI_DRDY_INT1_EN	0: UI data ready interrupt not routed to INT1 1: UI data ready interrupt routed to INT1
2	FIFO_THS_INT1_EN	0: FIFO threshold interrupt not routed to INT1 1: FIFO threshold interrupt routed to INT1
1	FIFO_FULL_INT1_EN	0: FIFO full interrupt not routed to INT1 1: FIFO full interrupt routed to INT1
0	UI_AGC_RDY_INT1_EN	0: UI AGC ready interrupt not routed to INT1 1: UI AGC ready interrupt routed to INT1

14.54 INT_SOURCE1

Name:	INT_SOURCE1	
Address:	102 (66h)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	-	Reserved
6	I3C_PROTOCOL_ERROR_IN T1_EN	0: I3C SM protocol error interrupt not routed to INT1 1: I3C SM protocol error interrupt routed to INT1
5:4	-	Reserved
3	SMD_INT1_EN	0: SMD interrupt not routed to INT1 1: SMD interrupt routed to INT1
2	WOM_Z_INT1_EN	0: Z-axis WOM interrupt not routed to INT1 1: Z-axis WOM interrupt routed to INT1
1	WOM_Y_INT1_EN	0: Y-axis WOM interrupt not routed to INT1 1: Y-axis WOM interrupt routed to INT1
0	WOM_X_INT1_EN	0: X-axis WOM interrupt not routed to INT1 1: X-axis WOM interrupt routed to INT1

14.55 INT_SOURCE2

Name:	INT_SOURCE2	
Address:	103 (67h)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:3	-	Reserved
2	AUX1_AGC_RDY_INT1_EN	0: AUX1 AGC ready interrupt not routed to INT1 1: AUX1 AGC ready interrupt routed to INT1
1	AUX1_FSYNC_INT1_EN	0: AUX1 FSYNC interrupt not routed to INT1 1: AUX1 FSYNC interrupt routed to INT1
0	AUX1_DRDY_INT1_EN	0: AUX1 data ready interrupt not routed to INT1 1: AUX1 data ready interrupt routed to INT1

14.56 INT_SOURCE3

Name:	INT_SOURCE3	
Address:	104 (68h)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	-	Reserved
6	UI_FSYNC_INT2_EN	0: UI FSYNC interrupt not routed to INT2 1: UI FSYNC interrupt routed to INT2
5	PLL_RDY_INT2_EN	0: PLL ready interrupt not routed to INT2 1: PLL ready interrupt routed to INT2
4	RESET_DONE_INT2_EN	0: Reset done interrupt not routed to INT2 1: Reset done interrupt routed to INT2
3	UI_DRDY_INT2_EN	0: UI data ready interrupt not routed to INT2 1: UI data ready interrupt routed to INT2
2	FIFO_THS_INT2_EN	0: FIFO threshold interrupt not routed to INT2 1: FIFO threshold interrupt routed to INT2
1	FIFO_FULL_INT2_EN	0: FIFO full interrupt not routed to INT2 1: FIFO full interrupt routed to INT2
0	UI_AGC_RDY_INT2_EN	0: UI AGC ready interrupt not routed to INT2 1: UI AGC ready interrupt routed to INT2

14.57 INT_SOURCE4

Name:	INT_SOURCE4	
Address:	105 (69h)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	-	Reserved
6	I3C_PROTOCOL_ERROR_IN_T2_EN	0: I3C SM protocol error interrupt not routed to INT2 1: I3C SM protocol error interrupt routed to INT2
5:4	-	Reserved
3	SMD_INT2_EN	0: SMD interrupt not routed to INT2 1: SMD interrupt routed to INT2
2	WOM_Z_INT2_EN	0: Z-axis WOM interrupt not routed to INT2 1: Z-axis WOM interrupt routed to INT2
1	WOM_Y_INT2_EN	0: Y-axis WOM interrupt not routed to INT2 1: Y-axis WOM interrupt routed to INT2
0	WOM_X_INT2_EN	0: X-axis WOM interrupt not routed to INT2 1: X-axis WOM interrupt routed to INT2

14.58 INT_SOURCES

Name:	INT_SOURCE5	
Address:	106 (6Ah)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:3	-	Reserved
2	AUX1_AGC_RDY_INT2_EN	0: AUX1 AGC ready interrupt not routed to INT2 1: AUX1 AGC ready interrupt routed to INT2
1	AUX1_FSYNC_INT2_EN	0: AUX1 FSYNC interrupt not routed to INT2 1: AUX1 FSYNC interrupt routed to INT2
0	AUX1_DRDY_INT2_EN	0: AUX1 data ready interrupt not routed to INT2 1: AUX1 data ready interrupt routed to INT2

14.59 FIFO_LOST_PKT0

Name:	FIFO_LOST_PKT0	
Address:	108 (6Ch)	
Serial IF:	R	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	FIFO_LOST_PKT_CNT[7:0]	Low byte, number of packets lost in the FIFO

14.60 FIFO_LOST_PKT1

Name:	FIFO_LOST_PKT1	
Address:	109 (6Dh)	
Serial IF:	R	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	FIFO_LOST_PKT_CNT[15:8]	High byte, number of packets lost in the FIFO

14.61 SELF_TEST_CONFIG

Name: SELF_TEST_CONFIG

Address: 112 (70h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7	-	Reserved
6	ACCEL_ST_POWER	Set to 1 for accel self-test Otherwise set to 0; Set to 0 after self-test is completed
5	EN_AZ_ST	Enable Z-accel self-test
4	EN_AY_ST	Enable Y-accel self-test
3	EN_AX_ST	Enable X-accel self-test
2	EN_GZ_ST	Enable Z-gyro self-test
1	EN_GY_ST	Enable Y-gyro self-test
0	EN_GX_ST	Enable X-gyro self-test

14.62 WHO_AM_I

Name: WHO_AM_I

Address: 117 (75h)

Serial IF: R

Reset value: 0x56

Clock Domain: ALL

BIT	NAME	FUNCTION
7:0	WHOAMI	Register to indicate to user which device is being accessed

Description:

This register is used to verify the identity of the device. The contents of WHOAMI is an 8-bit device ID. The default value of the register is 0x56. This is different from the I²C address of the device as seen on the slave I²C controller by the applications processor.

14.63 REG_BANK_SEL

Note: This register is accessible from all register banks

Name: REG_BANK_SEL		
Address: 118 (76h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: ALL		
BIT	NAME	FUNCTION
7:3	-	Reserved
2:0	BANK_SEL	Register bank selection 000: Bank 0 (default) 001: Bank 1 010: Bank 2 011: Bank 3 100: Bank 4 101: Reserved 110: Reserved 111: Reserved

15 USER BANK 1 REGISTER MAP – DESCRIPTIONS

This section describes the function and contents of each register within USR Bank 1.

15.1 SENSOR_CONFIG

Name:	SENSOR_CONFIG0	
Address:	03 (03h)	
Serial IF:	R/W	
Reset value:	0x80	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:6	-	Reserved
5	ZG_DISABLE	0: Z gyroscope is on 1: Z gyroscope is disabled
4	YG_DISABLE	0: Y gyroscope is on 1: Y gyroscope is disabled
3	XG_DISABLE	0: X gyroscope is on 1: X gyroscope is disabled
2	ZA_DISABLE	0: Z accelerometer is on 1: Z accelerometer is disabled
1	YA_DISABLE	0: Y accelerometer is on 1: Y accelerometer is disabled
0	XA_DISABLE	0: X accelerometer is on 1: X accelerometer is disabled

15.2 GYRO_CONFIG_STATIC2

Name:	GYRO_CONFIG_STATIC2	
Address:	11 (0Bh)	
Serial IF:	R/W	
Reset value:	0xA0	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:2	-	Reserved
1	GYRO_AAF_DIS	0: Enable gyroscope anti-aliasing filter (default) 1: Disable gyroscope anti-aliasing filter
0	GYRO_NF_DIS	0: Enable Notch Filter (default) 1: Disable Notch Filter

15.3 GYRO_CONF_ZG_STATIC3

Name:	GYRO_CONFIG_STATIC3	
Address:	12 (0Ch)	
Serial IF:	R/W	
Reset value:	0x0D	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:6	-	Reserved
5:0	GYRO_AAF_DELT	Controls bandwidth of the gyroscope anti-alias filter See section 5.2 for details

15.4 GYRO_CONFIG_STATIC4

Name:	GYRO_CONFIG_STATIC4	
Address:	13 (0Dh)	
Serial IF:	R/W	
Reset value:	0xAA	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	GYRO_AAF_DELTSQR[7:0]	Controls bandwidth of the gyroscope anti-alias filter See section 5.2 for details

15.5 GYRO_CONFIG_STATIC5

Name:	GYRO_CONFIG_STATIC5	
Address:	14 (0Eh)	
Serial IF:	R/W	
Reset value:	0x80	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:4	GYRO_AAF_BITSHIFT	Controls bandwidth of the gyroscope anti-alias filter See section 5.2 for details
3:0	GYRO_AAF_DELTSQR[11:8]	Controls bandwidth of the gyroscope anti-alias filter See section 5.2 for details

15.6 GYRO_CONFIG_STATIC6

Name:	GYRO_CONFIG_STATIC6	
Address:	15 (0Fh)	
Serial IF:	R/W	
Reset value:	0XX (Factory trimmed on an individual device basis)	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	GYRO_X_NF_COSWZ[7:0]	Used for gyroscope X-axis notch filter frequency selection See section 5.1 for details

15.7 GYRO_CONFIG_STATIC7

Name: GYRO_CONFIG_STATIC7
Address: 16 (10h)
Serial IF: R/W
Reset value: 0xXX (Factory trimmed on an individual device basis)
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_Y_NF_COSWZ[7:0]	Used for gyroscope Y-axis notch filter frequency selection See section 5.1 for details

15.8 GYRO_CONFIG_STATIC8

Name: GYRO_CONFIG_STATIC8
Address: 17 (11h)
Serial IF: R/W
Reset value: 0xXX (Factory trimmed on an individual device basis)
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_Z_NF_COSWZ[7:0]	Used for gyroscope Z-axis notch filter frequency selection See section 5.1 for details

15.9 GYRO_CONFIG_STATIC9

Name: GYRO_CONFIG_STATIC9
Address: 18 (12h)
Serial IF: R/W
Reset value: 0xXX (Factory trimmed on an individual device basis)
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:6	-	Reserved
5	GYRO_Z_NF_COSWZ_SEL[0]	Used for gyroscope Z-axis notch filter frequency selection See section 5.1 for details
4	GYRO_Y_NF_COSWZ_SEL[0]	Used for gyroscope Y-axis notch filter frequency selection See section 5.1 for details
3	GYRO_X_NF_COSWZ_SEL[0]	Used for gyroscope X-axis notch filter frequency selection See section 5.1 for details
2	GYRO_Z_NF_COSWZ[8]	Used for gyroscope Z-axis notch filter frequency selection See section 5.1 for details
1	GYRO_Y_NF_COSWZ[8]	Used for gyroscope Y-axis notch filter frequency selection See section 5.1 for details
0	GYRO_X_NF_COSWZ[8]	Used for gyroscope X-axis notch filter frequency selection See section 5.1 for details

15.10 GYRO_CONFIG_STATIC10

Name: GYRO_CONFIG_STATIC10

Address: 19 (13h)

Serial IF: R/W

Reset value: 0x11

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7	-	Reserved
6:4	GYRO_NF_BW_SEL	Selects bandwidth for gyroscope notch filter See section 5.1 for details
3:1	GYRO_HPF_BW_IND	Selects HPF 3dB cutoff frequency bandwidth See section 5.6 for details
0	GYRO_HPF_ORD_IND	Selects HPF filter order (see section 5.6 for details) 0: 1 st order HPF 1: 2 nd order HPF

15.11 XG_ST_DATA

Name: XG_ST_DATA

Address: 95 (5Fh)

Serial IF: R/W

Reset value: 0xXX (The value in this register indicates the self-test output generated during manufacturing tests)

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	XG_ST_DATA	X-gyro self-test data

15.12 YG_ST_DATA

Name: YG_ST_DATA

Address: 96 (60h)

Serial IF: R/W

Reset value: 0xXX (The value in this register indicates the self-test output generated during manufacturing tests)

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	YG_ST_DATA	Y-gyro self-test data

15.13 ZG_ST_DATA

Name: ZG_ST_DATA

Address: 97 (61h)

Serial IF: R/W

Reset value: 0xXX (The value in this register indicates the self-test output generated during manufacturing tests)

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ZG_ST_DATA	Z-gyro self-test data

15.14 TMSTVAL0

Name: TMSTVAL0

Address: 98 (62h)

Serial IF: R

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	TMST_VALUE[7:0]	When TMST_STROBE is programmed, the current value of the internal counter is latched to this register. Allows the full 20-bit precision of the time stamp to be read back.

15.15 TMSTVAL1

Name: TMSTVAL1

Address: 99 (63h)

Serial IF: R

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	TMST_VALUE[15:8]	When TMST_STROBE is programmed, the current value of the internal counter is latched to this register. Allows the full 20-bit precision of the time stamp to be read back.

15.16 TMSTVAL2

Name: TMSTVAL2

Address: 100 (64h)

Serial IF: R

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:4	-	Reserved
3:0	TMST_VALUE[19:16]	When TMST_STROBE is programmed, the current value of the internal counter is latched to this register. Allows the full 20-bit precision of the time stamp to be read back.

15.17 INTF_CONFIG4

Name: INTF_CONFIG4

Address: 122 (7Ah)

Serial IF: R/W

Reset value: 0x83

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:2	-	Reserved
6	I3C_BUS_MODE	0: Device is on a bus with I ² C and I3C SM devices 1: Device is on a bus with I3C SM devices only
5:2	-	Reserved
1	SPI_AP_4WIRE	0: AP interface uses 3-wire SPI mode 1: AP interface uses 4-wire SPI mode (default)
0	-	Reserved

15.18 INTF_CONFIG5

Name: INTF_CONFIG5

Address: 123 (7Bh)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:3	-	Reserved
2:1	PIN9_FUNCTION	Selects among the following functionalities for pin 9 00: INT2 01: FSYNC 10: CLKIN 11: Reserved
0	-	Reserved

15.19 INTF_CONFIG

Name:	INTF_CONFIG	
Address:	124 (7Ch)	
Serial IF:	R/W	
Reset value:	0x5F	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	ASYNCTIME0_DIS	0: I ³ C SM Asynchronous Mode 0 timing control feature is enabled, CCC SETXTIME ENTER ASYNC MODE 0 enables Asynchronous Mode 0. 1: I ³ C SM Asynchronous Mode 0 timing control feature is disabled, CCC SETXTIME ENTER ASYNC MODE 0 has no effect.
6:5	-	Reserved
4	I ³ C_EN	0: I ³ C SM slave not enabled 1: I ³ C SM slave enabled
3	I ³ C_IBI_BYTE_EN	0: I ³ C SM IBI payload function not enabled 1: I ³ C SM IBI payload function enabled
2	I ³ C_IBI_EN	0: I ³ C SM IBI function not enabled 1: I ³ C SM IBI function enabled
1	I ³ C_DDR_EN	0: I ³ C SM DDR mode not enabled 1: I ³ C SM DDR mode enabled
0	I ³ C_SDR_EN	0: I ³ C SM SDR mode not enabled 1: I ³ C SM SDR mode enabled

16 USER BANK 2 REGISTER MAP – DESCRIPTIONS

This section describes the function and contents of each register within USR Bank 2.

16.1 ACCEL_CONFIG_STATIC2

Name: ACCEL_CONFIG_STATIC2
Address: 03 (03h)
Serial IF: R/W
Reset value: 0x30
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7	-	Reserved
6:1	ACCEL_AAF_DELT	Controls bandwidth of the accelerometer anti-alias filter See section 5.2 for details
0	ACCEL_AAF_DIS	0: Enable accelerometer anti-aliasing filter (default) 1: Disable accelerometer anti-aliasing filter

16.2 ACCEL_CONFIG_STATIC3

Name: ACCEL_CONFIG_STATIC3
Address: 04 (04h)
Serial IF: R/W
Reset value: 0x40
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_AAF_DELTSQR[7:0]	Controls bandwidth of the accelerometer anti-alias filter See section 5.2 for details

16.3 ACCEL_CONFIG_STATIC4

Name: ACCEL_CONFIG_STATIC4
Address: 05 (05h)
Serial IF: R/W
Reset value: 0x62
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:4	ACCEL_AAF_BITSHIFT	Controls bandwidth of the accelerometer anti-alias filter See section 5.2 for details
3:0	ACCEL_AAF_DELTSQR[11:8]	Controls bandwidth of the accelerometer anti-alias filter See section 5.2 for details

16.4 XA_ST_DATA

Name: XA_ST_DATA
Address: 59 (3Bh)
Serial IF: R/W
Reset value: 0xFF (The value in this register indicates the self-test output generated during manufacturing tests)
Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	XA_ST_DATA	X-accel self-test data

16.5 YA_ST_DATA

Name: YA_ST_DATA		
Address: 60 (3Ch)		
Serial IF: R/W		
Reset value: 0xFF (The value in this register indicates the self-test output generated during manufacturing tests)		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:0	YA_ST_DATA	Y-accel self-test data

16.6 ZA_ST_DATA

Name: ZA_ST_DATA		
Address: 61 (3Dh)		
Serial IF: R/W		
Reset value: 0xFF (The value in this register indicates the self-test output generated during manufacturing tests)		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:0	ZA_ST_DATA	Z-accel self-test data

16.7 AUX1_CONFIG1

Name: AUX1_CONFIG1		
Address: 68 (44h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_AUX1		
BIT	NAME	FUNCTION
7:6	-	Reserved
5	AUX1_ACCEL_LP_CLK_SEL	0: Accelerometer LP mode uses Wake Up oscillator clock 1: Accelerometer LP mode uses RC oscillator clock This bit should be set to 1 only if Main path is in LP mode while AUX1 is attempting to use the PS port
4:2	AUX1_ODR	Gyroscope and Accelerometer ODR value 000: 32kHz (default) 001: 16kHz 010: 8kHz 011: 4kHz 100: 2kHz 101: 1kHz 110: Reserved 111: Reserved
1	GYRO_AUX1_EN	0: Disables AUX1 gyro path for all three axes (default) 1: Enables AUX1 gyro path for all three axes
0	ACCEL_AUX1_EN	0: Disables AUX1 accel path for all three axes (default) 1: Enables AUX1 accel path for all three axes

16.8 AUX1_CONFIG2

Name: AUX1_CONFIG2		
Address: 69 (45h)		
Serial IF: R/W		
Reset value: 0x40		
Clock Domain: SCLK_AUX1		
BIT	NAME	FUNCTION
7	-	Reserved
6	GYRO_AUX1_HPF_DIS	0: HPF enabled in AUX1 path 1: HPF disabled in AUX1 path (default)
5:3	GYRO_AUX1_FS_SEL	Full scale select for gyroscope AUX1 interface output 000: ±4000dps (default) 001: ±2000dps 010: ±1000dps 011: ±500dps 100: ±250dps 101: ±125dps 110: ±62.5dps 111: ±31.25dps
2:0	ACCEL_AUX1_FS_SEL	Full scale select for accelerometer AUX1 interface output 000: ±32g (default) 001: ±16g 010: ±8g 011: ±4g 100: Reserved 101: Reserved 110: Reserved 111: Reserved

16.9 AUX1_CONFIG3

Name: AUX1_CONFIG3		
Address: 70 (46h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_AUX1		
BIT	NAME	FUNCTION
7:2	-	Reserved
1	GYRO_HPF_AUX1_AUTOZE RO	0: No effect (default) 1: Auto zeros the HPF output
0	GYRO_HPF_AUX1_RESET	0: No effect (default) 1: Resets the HPF

16.10 TEMP_DATA1_AUX1

Name: TEMP_DATA1_AUX1

Address: 71 (47h)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	TEMP_DATA_AUX1[15:8]	Upper byte of temperature data for AUX1 path

16.11 TEMP_DATA0_AUX1

Name: TEMP_DATA0_AUX1

Address: 72 (48h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	TEMP_DATA_AUX1[7:0]	Lower byte of temperature data for AUX1 path

16.12 ACCEL_DATA_X1_AUX1

Name: ACCEL_DATA_X1_AUX1

Address: 73 (49h)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_X_AUX1[15:8]	Upper byte of Accel X-axis data for AUX1 path

16.13 ACCEL_DATA_X0_AUX1

Name: ACCEL_DATA_X0_AUX1

Address: 74 (4Ah)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_X_AUX1[7:0]	Lower byte of Accel X-axis data for AUX1 path

16.14 ACCEL_DATA_Y1_AUX1

Name: ACCEL_DATA_Y1_AUX1

Address: 75 (4Bh)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Y_AUX1[15:8]	Upper byte of Accel Y-axis data for AUX1 path

16.15 ACCEL_DATA_Y0_AUX1

Name: ACCEL_DATA_Y0_AUX1

Address: 76 (4Ch)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Y_AUX1[7:0]	Lower byte of Accel Y-axis data for AUX1 path

16.16 ACCEL_DATA_Z1_AUX1

Name: ACCEL_DATA_Z1_AUX1

Address: 77 (4Dh)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Z_AUX1[15:8]	Upper byte of Accel Z-axis data for AUX1 path

16.17 ACCEL_DATA_Z0_AUX1

Name: ACCEL_DATA_Z0_AUX1

Address: 78 (4Eh)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	ACCEL_DATA_Z_AUX1[7:0]	Lower byte of Accel Z-axis data for AUX1 path

16.18 GYRO_DATA_X1_AUX1

Name: GYRO_DATA_X1_AUX1

Address: 79 (4Fh)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	GYRO_DATA_X_AUX1[15:8]	Upper byte of Gyro X-axis data for AUX1 path

16.19 GYRO_DATA_X0_AUX1

Name: GYRO_DATA_X0_AUX1

Address: 80 (50h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	GYRO_DATA_X_AUX1[7:0]	Lower byte of Gyro X-axis data for AUX1 path

16.20 GYRO_DATA_Y1_AUX1

Name: GYRO_DATA_Y1_AUX1

Address: 81 (51h)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Y_AUX1[15:8]	Upper byte of Gyro Y-axis data for AUX1 path

16.21 GYRO_DATA_Y0_AUX1

Name: GYRO_DATA_Y0_AUX1

Address: 82 (52h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Y_AUX1[7:0]	Lower byte of Gyro Y-axis data for AUX1 path

16.22 GYRO_DATA_Z1_AUX1

Name: GYRO_DATA_Z1_AUX1

Address: 83 (53h)

Serial IF: SYNCR

Reset value: 0x80

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Z_AUX1[15:8]	Upper byte of Gyro Z-axis data for AUX1 path

16.23 GYRO_DATA_Z0_AUX1

Name: GYRO_DATA_Z0_AUX1

Address: 84 (54h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	GYRO_DATA_Z_AUX1[7:0]	Lower byte of Gyro Z-axis data for AUX1 path

16.24 TMSTVAL0_AUX1

Name: TMSTVAL0_AUX1

Address: 85 (55h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	TMST_FSYNC_DATA_AUX1[7:0]	Stores lower byte of the time delta from the rising edge of FSYNC to the latest ODR until the AUX1 interface reads the FSYNC tag in the status register

16.25 TMSTVAL1_AUX1

Name: TMSTVAL1_AUX1

Address: 86 (56h)

Serial IF: SYNCR

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:0	TMST_FSYNC_DATA_AUX1[15:8]	Stores upper byte of the time delta from the rising edge of FSYNC to the latest ODR until the AUX1 interface reads the FSYNC tag in the status register

16.26 INT_STATUS_AUX1

Name: INT_STATUS_AUX1

Address: 87 (57h)

Serial IF: R/C

Reset value: 0x00

Clock Domain: SCLK_AUX1

BIT	NAME	FUNCTION
7:3	-	Reserved
2	FSYNC_AUX1_INT	This bit is readable by AUX1 interface and is set to 1 when FSYNC interrupt is generated. The bit clears to 0 after the register has been read.
1	DATA_RDY_AUX1_INT	This bit automatically sets to 1 when an AUX1 Data Ready interrupt is generated. The bit clears to 0 after the register has been read.
0	AGC_RDY_AUX1_INT	This bit automatically sets to 1 when an AUX1 AGC Ready interrupt is generated. The bit clears to 0 after the register has been read.

16.27 AUX1_SPI_REG1

Name: AUX1_SPI_REG1

Address: 113 (71h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:2	-	Reserved
1:0	AUX1_SPI_REG1	To avoid leakage current, it is recommended to not leave the AUX1 interface SPI lines floating when the PS system is off.

		<p>From the primary I²C/I3CSM/SPI interface: Write 01 in this register field before turning off the PS system.</p> <p>From the primary I²C/I3CSM/SPI interface: Write 00 in this register field before turning on the PS system.</p> <p>See section 4.3 for details</p>
--	--	---

16.28 AUX1_SPI_REG2

Name: AUX1_SPI_REG2		
Address: 114 (72h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:2	-	Reserved
1:0	AUX1_SPI_REG2	<p>To avoid leakage current, it is recommended to not leave the AUX1 interface SPI lines floating when the PS system is off.</p> <p>From the primary I²C/I3CSM/SPI interface: Write 01 in this register field before turning off the PS system.</p> <p>From the primary I²C/I3CSM/SPI interface: Write 00 in this register field before turning on the PS system.</p> <p>See section 4.3 for details</p>

16.29 AUX1_SPI_REG3

Name: AUX1_SPI_REG3		
Address: 115 (73h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:2	-	Reserved
1:0	AUX1_SPI_REG3	<p>To avoid leakage current, it is recommended to not leave the AUX1 interface SPI lines floating when the PS system is off.</p> <p>From the primary I²C/I3CSM/SPI interface: Write 01 in this register field before turning off the PS system.</p> <p>From the primary I²C/I3CSM/SPI interface: Write 00 in this register field before turning on the PS system.</p> <p>See section 4.3 for details</p>

17 USER BANK 3 REGISTER MAP – DESCRIPTIONS

This section describes the function and contents of each register within USR Bank 3.

17.1 S4S_CONFIG

Name: S4S_CONFIG Address: 119 (77h) Serial IF: R/W Reset value: 0x00 Clock Domain: SCLK_UI																		
BIT	NAME	FUNCTION																
7:6	-	Reserved																
5:4	S4S_SENSOR_SELECT	Selects which sensor is in control of S4S when both sensors are selected (controls S4S ODR, TPH, for both frequency and phase loops) 0x: Slowest ODR sensor 10: Do Not Use 11: Do Not Use																
3	S4S_FREQ_ADJ_DEL_DIS	In S4S state machine, Frequency update to S4S is available ahead of the Phase update. In order to minimize the number of interruptions to the ODR, we delay the Frequency update to when the phase update to the ODR is done. 0: Delay the frequency update to sync with phase update 1: Apply frequency update earlier than phase update (causes 2 interruptions to ODR)																
2:0	S4S_PHASE_CORR_DECIM	Register for abort and reset occurrence decimation. 0 --> Apply phase correction for every 2 ST/DT pair (1 consecutive pair) 1-7 --> Apply phase correction on every N ST/DT pairs as per table below (no phase update for ST/DT pairs that are in-between, only frequency update) <table border="1" data-bbox="612 1199 1444 1465"> <thead> <tr> <th>S4S_PHASE_CORR_DECIM</th><th>N</th></tr> </thead> <tbody> <tr><td>1</td><td>2</td></tr> <tr><td>2</td><td>3</td></tr> <tr><td>3</td><td>4</td></tr> <tr><td>4</td><td>8</td></tr> <tr><td>5</td><td>16</td></tr> <tr><td>6</td><td>24</td></tr> <tr><td>7</td><td>32</td></tr> </tbody> </table>	S4S_PHASE_CORR_DECIM	N	1	2	2	3	3	4	4	8	5	16	6	24	7	32
S4S_PHASE_CORR_DECIM	N																	
1	2																	
2	3																	
3	4																	
4	8																	
5	16																	
6	24																	
7	32																	

17.2 S4S_GYRO_TPH1

Name: S4S_GYRO_TPH1 Address: 123 (7Bh) Serial IF: R/W Reset value: 0x00 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:0	S4S_GYRO_TPH1	S4S Gyroscope TPH command first byte.

17.3 S4S_GYRO_TPH2

Name: S4S_GYRO_TPH2

Address: 124 (7Ch)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	S4S_GYRO_TPH2	S4S Gyroscope TPH command second byte.

17.4 S4S_ACCEL_TPH1

Name: S4S_ACCEL_TPH1

Address: 125 (7Dh)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	S4S_ACCEL_TPH1	S4S Accelerometer TPH command first byte.

17.5 S4S_ACCEL_TPH2

Name: S4S_ACCEL_TPH2

Address: 126 (7Eh)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	S4S_ACCEL_TPH2	S4S Accelerometer TPH command second byte.

17.6 S4S_RR

Name: S4S_RR

Address: 127 (7Fh)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:2	-	Reserved
1:0	S4S_RR	S4S Resolution Command. The two bits indicate which T_Ph division factor is used for calculating the time resolution steps. 2'b00 – 2 ⁽⁻¹¹⁾ 2'b01 – 2 ⁽⁻¹²⁾ 2'b10 – 2 ⁽⁻¹³⁾ 2'b11 – 2 ⁽⁻¹⁴⁾

18 USER BANK 4 REGISTER MAP – DESCRIPTIONS

This section describes the function and contents of each register within USR Bank 4.

18.1 FDR_CONFIG

Name: FDR_CONFIG		
Address: 09 (09h)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7	-	Reserved
6:0	FDR_SEL	<p>FIFO packet rate decimation factor. Sets the number of discarded FIFO packets. Valid range is 0 to 127. User must disable sensors when initializing FDR_SEL value or making changes to it.</p> <p>0000000: Decimation is disabled, all packets are sent to FIFO 0000001: 1 packet out of 2 is sent to FIFO 0000010: 1 packet out of 3 is sent to FIFO 0000011: 1 packet out of 4 is sent to FIFO ... 1111111: 1 packet out of 128 is sent to FIFO</p>

18.2 APEX_CONFIG1

Name: APEX_CONFIG1		
Address: 64 (40h)		
Serial IF: R/W		
Reset value: 0xA2		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:4	LOW_ENERGY_AMP_TH_SEL	<p>Pedometer Low Energy mode amplitude threshold selection Use default value 1010b</p>
3:0	DMP_POWER_SAVE_TIME_SEL	<p>When the DMP is in power save mode, it is awakened by the WOM and will wait for a certain duration before going back to sleep. This bitfield configures this duration.</p> <p>0000: 0 seconds 0001: 4 seconds 0010: 8 seconds 0011: 12 seconds 0100: 16 seconds 0101: 20 seconds 0110: 24 seconds 0111: 28 seconds 1000: 32 seconds 1001: 36 seconds 1010: 40 seconds 1011: 44 seconds 1100: 48 seconds 1101: 52 seconds</p>

		1110: 56 seconds 1111: 60 seconds
--	--	--------------------------------------

18.3 APEX_CONFIG2

Name: APEX_CONFIG2 Address: 65 (41h) Serial IF: R/W Reset value: 0x85 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:4	PED_AMP_TH_SEL	Pedometer amplitude threshold selection Use default value 1000b

		Pedometer step count detection window Use default value 0101b 0000: 0 steps 0001: 1 step 0010: 2 steps 0011: 3 steps 0100: 4 steps 0101: 5 steps (default) 0110: 6 steps 0111: 7 steps 1000: 8 steps 1001: 9 steps 1010: 10 steps 1011: 11 steps 1100: 12 steps 1101: 13 steps 1110: 14 steps 1111: 15 steps
3:0	PED_STEP_CNT_TH_SEL	

18.4 APEX_CONFIG3

Name: APEX_CONFIG3 Address: 66 (42h) Serial IF: R/W Reset value: 0x51 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	PED_STEP_DET_TH_SEL	Pedometer step detection threshold selection Use default value 010b 000: 0 steps 001: 1 step 010: 2 steps (default) 011: 3 steps 100: 4 steps 101: 5 steps 110: 6 steps 111: 7 steps
4:2	PED_SB_TIMER_TH_SEL	Pedometer step buffer timer threshold selection Use default value 100b

		000: 0 samples 001: 1 sample 010: 2 samples 011: 3 samples 100: 4 samples (default) 101: 5 samples 110: 6 samples 111: 7 samples
1:0	PED_HI_EN_TH_SEL	Pedometer high energy threshold selection Use default value 01b

18.5 APEX_CONFIG4

Name: APEX_CONFIG4 Address: 67 (43h) Serial IF: R/W Reset value: 0xA4 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:6	TILT_WAIT_TIME_SEL	Configures duration of delay after tilt is detected before interrupt is triggered 00: 0s 01: 2s 10: 4s (default) 11: 6s
5:3	LOWG_PEAK_TH_HYST_SEL	This threshold is added to the LOWG peak threshold after the initial threshold is met. The threshold values corresponding to parameter values are shown below: 000: 31mgaae 001: 63mgaae 010: 94mgaae 011: 125mgaae 100: 156mgaae (default) 101: 188mgaae 110: 219mgaae 111: 250mgaae
2:0	HIGHG_PEAK_TH_HYST_SEL	This threshold is added to the HIGHG peak threshold after the initial threshold is met. The threshold values corresponding to parameter values are shown below: 000: 31mgaae 001: 63mgaae 010: 94mgaae 011: 125mgaae 100: 156mgaae (default) 101: 188mgaae 110: 219mgaae 111: 250mgaae

18.6 APEX_CONFIG5

<p>Name: APEX_CONFIG5 Address: 68 (44h) Serial IF: R/W Reset value: 0x8C Clock Domain: SCLK_UI</p>		
BIT	NAME	FUNCTION
7:3	LOWG_PEAK_TH_SEL	<p>This parameter defines the threshold for accelerometer values below which the algorithm considers it has entered low-g state. The threshold values corresponding to parameter values are shown below:</p> <p>00000: 31mgee 00001: 63mgee 00010: 94mgee 00011: 125mgee 00100: 156mgee 00101: 188mgee 00110: 219mgee 00111: 250mgee 01000: 281mgee 01001: 313mgee 01010: 344mgee 01011: 375mgee 01100: 406mgee 01101: 438mgee 01110: 469mgee 01111: 500mgee 10000: 531mgee 10001: 563mgee (default) 10010: 594mgee 10011: 625mgee 10100: 656mgee 10101: 688mgee 10110: 719mgee 10111: 750mgee 11000: 781mgee 11001: 813mgee 11010: 844mgee 11011: 875mgee 11100: 906mgee 11101: 938mgee 11110: 969mgee 11111: 1000mgee</p>
2:0	LOWG_TIME_TH_SEL	<p>This parameter defines the number of samples for which the device should stay in low-g before triggering interrupt.</p> <p>Number of samples = LOWG_TIME_TH_SEL + 1</p> <p>Default value is 4 (i.e. 5 samples)</p>

18.7 APEX_CONFIG6

<p>Name: APEX_CONFIG6 Address: 69 (45h) Serial IF: R/W Reset value: 0x5C Clock Domain: SCLK_UI</p>		
BIT	NAME	FUNCTION
7:3	HIGHG_PEAK_TH_SEL	<p>This parameter defines the threshold for accelerometer values above which the algorithm considers it has entered high-g state. The threshold values corresponding to parameter values are shown below:</p> <p>00000: 250mgaae 00001: 500mgaae 00010: 750mgaae 00011: 1000mgaae 00100: 1250mgaae 00101: 1500mgaae 00110: 1750mgaae 00111: 2000mgaae 01000: 2250mgaae 01001: 2500mgaae 01010: 2750mgaae 01011: 3000mgaae 01100: 3250mgaae 01101: 3500mgaae 01110: 3750mgaae 01111: 4000mgaae 10000: 4250mgaae 10001: 4500mgaae 10010: 4750mgaae 10011: 5000mgaae 10100: 5250mgaae 10101: 5500mgaae 10110: 5750mgaae 10111: 6000mgaae 11000: 6250mgaae 11001: 6500mgaae 11010: 6750mgaae 11011: 7000mgaae 11100: 7250mgaae 11101: 7500mgaae 11110: 7750mgaae 11111: 8000mgaae</p>
2:0	HIGHG_TIME_TH_SEL	<p>This parameter defines the number of samples for which the device should stay in high-g before triggering interrupt.</p> <p>Number of samples = HIGHG_TIME_TH_SEL + 1</p> <p>Default value is 4 (i.e. 5 samples)</p>

S

18.8 APEX_CONFIG7

Name: APEX_CONFIG7

Address: 70 (46h)

Serial IF: R/W

Reset value: 0x45

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:2	TAP_MIN_JERK_THR	Tap Detection minimum jerk threshold Use default value 010001b
1:0	TAP_MAX_PEAK_TOL	Tap Detection maximum peak tolerance Use default value 01b

18.9 APEX_CONFIG8

Name: APEX_CONFIG8

Address: 71 (47h)

Serial IF: R/W

Reset value: 0x5B

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7	-	Reserved
6:5	TAP_TMAX	Tap measurement window (number of samples) Use default value 01b
4:3	TAP_TAVG	Tap energy measurement window (number of samples) Use default value 01b
2:0	TAP_TMIN	Single tap window (number of samples) Use default value 011b

18.10 APEX_CONFIG9

Name: APEX_CONFIG9

Address: 72 (48h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:1	-	Reserved
0	SENSITIVITY_MODE	0: Low power mode at accelerometer ODR 25Hz; High performance mode at accelerometer ODR \geq 50Hz 1: Low power and slow walk mode at accelerometer ODR 25Hz; Slow walk mode at accelerometer ODR \geq 50Hz

18.11 APEX_CONFIG10

Name: APEX_CONFIG10 Address: 73 (49h) Serial IF: R/W Reset value: 0x00 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	FF_MIN_DURATION_CM	<p>This parameter defines the minimum freefall length that the algorithm should report. Freefalls smaller than this value are ignored. Freefall lengths corresponding to parameter values are shown below:</p> <ul style="list-style-type: none"> 000: 13cm (default) 001: 19cm 010: 28cm 011: 38cm 100: 50cm 101: 64cm 110: 78cm 111: 95cm
4:2	FF_MAX_DURATION_CM	<p>This parameter defines the maximum freefall length that the algorithm should report. Freefalls longer than this value are ignored. Freefall lengths corresponding to parameter values are shown below:</p> <ul style="list-style-type: none"> 000: 113cm (default) 001: 154cm 010: 201cm 011: 255cm 100: 314cm 101: 380cm 110: 452cm 111: 531cm
1:0	FF_DEBOUNCE_DURATION	<p>This parameter defines the time during which low-g and high-g events are not taken into account after a high-g event. It helps to avoid detecting bounces as free fall. Debounce durations corresponding to parameter values are shown below:</p> <ul style="list-style-type: none"> 00: 0s 01: 1s 10: 2s 11: 3s

18.12 ACCEL_WOM_X_THR

Name: ACCEL_WOM_X_THR Address: 74 (4Ah) Serial IF: R/W Reset value: 0x00 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:0	WOM_X_TH	<p>Threshold value for the Wake on Motion Interrupt for X-axis accelerometer</p> <p>WoM thresholds are expressed in fixed “mg” independent of the selected Range [0g : 1g]; Resolution 1g/256≈3.9mg</p>

18.13 ACCEL_WOM_Y_THR

Name:	ACCEL_WOM_Y_THR	
Address:	75 (4Bh)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	WOM_Y_TH	Threshold value for the Wake on Motion Interrupt for Y-axis accelerometer WoM thresholds are expressed in fixed “mg” independent of the selected Range [0g : 1g]; Resolution 1g/256=~3.9mg

18.14 ACCEL_WOM_Z_THR

Name:	ACCEL_WOM_Z_THR	
Address:	76 (4Ch)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	WOM_Z_TH	Threshold value for the Wake on Motion Interrupt for Z-axis accelerometer WoM thresholds are expressed in fixed “mg” independent of the selected Range [0g : 1g]; Resolution 1g/256=~3.9mg

18.15 INT_SOURCE6

Name:	INT_SOURCE6	
Address:	77 (4Dh)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:6	-	Reserved
5	STEP_DET_INT1_EN	0: Step detect interrupt not routed to INT1 1: Step detect interrupt routed to INT1
4	STEP_CNT_OFL_INT1_EN	0: Step count overflow interrupt not routed to INT1 1: Step count overflow interrupt routed to INT1
3	TILT_DET_INT1_EN	0: Tilt detect interrupt not routed to INT1 1: Tile detect interrupt routed to INT1
2	WAKE_DET_INT1_EN	0: Wake detect interrupt not routed to INT1 1: Wake detect interrupt routed to INT1
1	SLEEP_DET_INT1_EN	0: Sleep detect interrupt not routed to INT1 1: Sleep detect interrupt routed to INT1
0	TAP_DET_INT1_EN	0: Tap detect interrupt not routed to INT1 1: Tap detect interrupt routed to INT1

18.16 INT_SOURCE7

Name: INT_SOURCE7		
Address: 78 (4Eh)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:6	-	Reserved
5	STEP_DET_INT2_EN	0: Step detect interrupt not routed to INT2 1: Step detect interrupt routed to INT2
4	STEP_CNT_OFL_INT2_EN	0: Step count overflow interrupt not routed to INT2 1: Step count overflow interrupt routed to INT2
3	TILT_DET_INT2_EN	0: Tilt detect interrupt not routed to INT2 1: Tile detect interrupt routed to INT2
2	WAKE_DET_INT2_EN	0: Wake detect interrupt not routed to INT2 1: Wake detect interrupt routed to INT2
1	SLEEP_DET_INT2_EN	0: Sleep detect interrupt not routed to INT2 1: Sleep detect interrupt routed to INT2
0	TAP_DET_INT2_EN	0: Tap detect interrupt not routed to INT2 1: Tap detect interrupt routed to INT2

18.17 INT_SOURCE8

Name: INT_SOURCE8		
Address: 79 (4Fh)		
Serial IF: R/W		
Reset value: 0x00		
Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7	-	Reserved
6	AUX1_DRDY_IBI_EN	0: AUX1 data ready interrupt not routed to IBI 1: AUX1 data ready interrupt routed to IBI
5	FSYNC_IBI_EN	0: FSYNC interrupt not routed to IBI 1: FSYNC interrupt routed to IBI
4	PLL_RDY_IBI_EN	0: PLL ready interrupt not routed to IBI 1: PLL ready interrupt routed to IBI
3	UI_DRDY_IBI_EN	0: UI data ready interrupt not routed to IBI 1: UI data ready interrupt routed to IBI
2	FIFO_THS_IBI_EN	0: FIFO threshold interrupt not routed to IBI 1: FIFO threshold interrupt routed to IBI
1	FIFO_FULL_IBI_EN	0: FIFO full interrupt not routed to IBI 1: FIFO full interrupt routed to IBI
0	AGC_RDY_IBI_EN	0: AGC ready interrupt not routed to IBI 1: AGC ready interrupt routed to IBI

18.18 INT_SOURCE9

Name:	INT_SOURCE9	
Address:	80 (50h)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7	I3C_PROTOCOL_ERROR_IBI_EN	0: I3C SM protocol error interrupt not routed to IBI 1: I3C SM protocol error interrupt routed to IBI
6:5	-	Reserved
4	SMD_IBI_EN	0: SMD interrupt not routed to IBI 1: SMD interrupt routed to IBI
3	WOM_Z_IBI_EN	0: Z-axis WOM interrupt not routed to IBI 1: Z-axis WOM interrupt routed to IBI
2	WOM_Y_IBI_EN	0: Y-axis WOM interrupt not routed to IBI 1: Y-axis WOM interrupt routed to IBI
1	WOM_X_IBI_EN	0: X-axis WOM interrupt not routed to IBI 1: X-axis WOM interrupt routed to IBI
0	-	Reserved

18.19 INT_SOURCE10

Name:	INT_SOURCE10	
Address:	81 (51h)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:6	-	Reserved
5	STEP_DET_IBI_EN	0: Step detect interrupt not routed to IBI 1: Step detect interrupt routed to IBI
4	STEP_CNT_OFL_IBI_EN	0: Step count overflow interrupt not routed to IBI 1: Step count overflow interrupt routed to IBI
3	TILT_DET_IBI_EN	0: Tilt detect interrupt not routed to IBI 1: Tile detect interrupt routed to IBI
2	WAKE_DET_IBI_EN	0: Wake detect interrupt not routed to IBI 1: Wake detect interrupt routed to IBI
1	SLEEP_DET_IBI_EN	0: Sleep detect interrupt not routed to IBI 1: Sleep detect interrupt routed to IBI
0	TAP_DET_IBI_EN	0: Tap detect interrupt not routed to IBI 1: Tap detect interrupt routed to IBI

18.20 INTF_CONFIG10

Name: INTF_CONFIG10 Address: 82 (52h) Serial IF: R/W Reset value: 0x18 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:5	-	Reserved
4	I3C_DDR_WR_MODE	<p>This bit controls how I3C slave treats the 1st 2-byte data from host in a DDR write operation.</p> <p>0: (a) The 1st-byte in DDR-WR configures the starting register address where the write operation should occur. (b) The 2nd-byte in DDR-WR is ignored and dropped. (c) The 3rd-byte in DDR-WR will be written into the register with address specified by the 1st-byte. Or, the next DDR-RD will be starting from the address specified by the 1st-byte of previous DDR-WR.</p> <p>1: (a) The 1st-byte in DDR-WR configures the starting register address where the write operation should occur. (b) The 2nd-byte in DDR-WR will be written into the register with address specified by the 1st-byte.</p>
3	I3C_IGNORE_S0	<p>0: Instruct I3C interface not to ignore S0 error</p> <p>1: Instruct I3C to ignore S0 error</p>
2:0	-	Reserved

18.21 INTF_COMM_ERR

Name: INTF_COMM_ERR Address: 83 (53h) Serial IF: R/C Reset value: 0x00 Clock Domain: SCLK_UI		
BIT	NAME	FUNCTION
7:6	-	Reserved
5	I3C_S0_ERR	<p>0: S0 error which is defined in I3C specification ver1.0 did not occur</p> <p>1: S0 error which is defined in I3C specification ver1.0 occurred</p>
4	I3C_CCC_PARITY_ERR	<p>0: CCC parity check error did not occur</p> <p>1: CCC parity check error occurred</p>
3	I3C_SDR_PARITY_ERR	<p>0: SDR parity check error did not occur</p> <p>1: SDR parity check error occurred</p>
2	I3C_DDR_PARITY_ERR	<p>0: DDR parity check error did not occur</p> <p>1: DDR parity check error occurred</p>
1	I3C_DDR_FRAMING_ERR	<p>0: DDR framing error did not occur</p> <p>1: DDR framing error occurred</p>
0	I3C_CRC_ERR	<p>0: DDR CRC5 error did not occur</p> <p>1: DDR CRC5 error occurred</p>

18.22 OFFSET_USER0

Name: OFFSET_USER0

Address: 119 (77h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_X_OFFUSER[7:0]	Lower bits of X-gyro offset programmed by user. Max value is ±64 dps, resolution is 1/32 dps.

18.23 OFFSET_USER1

Name: OFFSET_USER1

Address: 120 (78h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:4	GYRO_Y_OFFUSER[11:8]	Upper bits of Y-gyro offset programmed by user. Max value is ±64 dps, resolution is 1/32 dps.
3:0	GYRO_X_OFFUSER[11:8]	Upper bits of X-gyro offset programmed by user. Max value is ±64 dps, resolution is 1/32 dps.

18.24 OFFSET_USER2

Name: OFFSET_USER2

Address: 121 (79h)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_Y_OFFUSER[7:0]	Lower bits of Y-gyro offset programmed by user. Max value is ±64 dps, resolution is 1/32 dps.

18.25 OFFSET_USER3

Name: OFFSET_USER3

Address: 122 (7Ah)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	GYRO_Z_OFFUSER[7:0]	Lower bits of Z-gyro offset programmed by user. Max value is ±64 dps, resolution is 1/32 dps.

18.26 OFFSET_USER4

Name:	OFFSET_USER4	
Address:	123 (7Bh)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:4	ACCEL_X_OFFUSER[11:8]	Upper bits of X-accel offset programmed by user. Max value is $\pm 1g$, resolution is 0.5mg.
3:0	GYRO_Z_OFFUSER[11:8]	Upper bits of Z-gyro offset programmed by user. Max value is ± 64 dps, resolution is 1/32 dps.

18.27 OFFSET_USERS5

Name:	OFFSET_USERS5	
Address:	124 (7Ch)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	ACCEL_X_OFFUSER[7:0]	Lower bits of X-accel offset programmed by user. Max value is $\pm 1g$, resolution is 0.5mg.

18.28 OFFSET_USER6

Name:	OFFSET_USER6	
Address:	125 (7Dh)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:0	ACCEL_Y_OFFUSER[7:0]	Lower bits of Y-accel offset programmed by user. Max value is $\pm 1g$, resolution is 0.5mg.

18.29 OFFSET_USER7

Name:	OFFSET_USER7	
Address:	126 (7Eh)	
Serial IF:	R/W	
Reset value:	0x00	
Clock Domain:	SCLK_UI	
BIT	NAME	FUNCTION
7:4	ACCEL_Z_OFFUSER[11:8]	Upper bits of Z-accel offset programmed by user. Max value is $\pm 1g$, resolution is 0.5mg.
3:0	ACCEL_Y_OFFUSER[11:8]	Upper bits of Y-accel offset programmed by user. Max value is $\pm 1g$, resolution is 0.5mg.

18.30 OFFSET_USER8

Name: OFFSET_USER8

Address: 127 (7Fh)

Serial IF: R/W

Reset value: 0x00

Clock Domain: SCLK_UI

BIT	NAME	FUNCTION
7:0	ACCEL_Z_OFFUSER[7:0]	Lower bits of Z-accel offset programmed by user. Max value is ±1g, resolution is 0.5mg.

19 REFERENCE

Please refer to the following application note for additional information.

- IMU PCB Design and MEMS Assembly Guidelines (AN-000393)

20 SMARTINDUSTRIAL FAMILY

TDK's SmartIndustrial™ portfolio of 6-axis IMU and 3-axis Accelerometer products delivers the precise motion, vibration and inclination measurements that industrial applications need. These products offer the ability to take precise measurements in harsh environments with vibration and wide temperature variations.

TDK's broad portfolio of Industrial Motion Sensing solutions offers customers a range of performance and cost choices, enabling a wide variety of Industrial navigation, stabilization, and monitoring applications.

By combining its innovative MEMS Motion Sensor technologies with its expertise of Industrial applications, TDK offers unique capabilities such as Fault-tolerant motion sensing solution.

21 REVISION HISTORY

REVISION DATE	REVISION	DESCRIPTION
06/26/2023	1.0	Initial Release
02/13/2024	1.1	Updated Current Consumption specs (Table 3); Updated Reference (Section 19)



<https://invensense.tdk.com/longevity/>

This information furnished by InvenSense or its affiliates ("TDK InvenSense") is believed to be accurate and reliable. However, no responsibility is assumed by TDK InvenSense for its use, or for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. TDK InvenSense reserves the right to make changes to this product, including its circuits and software, in order to improve its design and/or performance, without prior notice. TDK InvenSense makes no warranties, neither expressed nor implied, regarding the information and specifications contained in this document. TDK InvenSense assumes no responsibility for any claims or damages arising from information contained in this document, or from the use of products and services detailed therein. This includes, but is not limited to, claims or damages based on the infringement of patents, copyrights, mask work and/or other intellectual property rights.

Certain intellectual property owned by InvenSense and described in this document is patent protected. No license is granted by implication or otherwise under any patent or patent rights of InvenSense. This publication supersedes and replaces all information previously supplied. Trademarks that are registered trademarks are the property of their respective companies. TDK InvenSense sensors should not be used or sold in the development, storage, production or utilization of any conventional or mass-destructive weapons or for any other weapons or life threatening applications, as well as in any other life critical applications such as medical equipment, transportation, aerospace and nuclear instruments, undersea equipment, power plant equipment, disaster prevention and crime prevention equipment.

©2024 InvenSense. All rights reserved. InvenSense, SmartMotion, MotionProcessing, MotionProcessor, SensorStudio, UltraPrint, MotionTracking, CHIRP Microsystems, SmartBug, SonicLink, Digital Motion Processor, AAR, and the InvenSense logo are registered trademarks of InvenSense, Inc. The TDK logo is a trademark of TDK Corporation. Other company and product names may be trademarks of the respective companies with which they are associated.

 **TDK** InvenSense

©2024 InvenSense. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for IMUs - Inertial Measurement Units category:

Click to view products by TDK manufacturer:

Other Similar products are found below :

[LSM6DSOQTR](#) [LSM6DSOWTR](#) [ICM-42670-P](#) [IIM-42652](#) [MPU-6500](#) [ISM330DLCTR](#) [MTi-30-2A8G4](#) [ICM-20948](#) [ICM-30670](#) [MC6470](#)
[ICM-20602](#) [LSM303AGRTR](#) [MTLT305D](#) [OpenIMU300RI](#) [4464](#) [4502](#) [4517](#) [ADIS16470AMLZ](#) [ADIS16507-2BMLZ](#) [BHI160B](#) [BMI085](#)
[BMI088](#) [BMI270](#) [BMI323](#) [BMX055](#) [BMX160](#) [BNO055](#) [SEN0373](#) [SEN0374](#) [TARS-BAASS](#) [3DM-CV7-AHRS](#) [3DM-CV7-AR](#) [3DM-GX5-GNSS/INS](#)
[LSM6DSLTR](#) [LSM6DSLSTR](#) [MPU-6050](#) [SCC2130-D08-05](#) [SCC2230-D08-05](#) [SCC2230-E02-05](#) [FIS1100](#) [FMT1010T](#)
[FMT1020T](#) [MTI-300-2A8G4](#) [MTI-200-2A8G4](#) [MTI-100-2A8G4](#) [MTi-610](#) [MTi-630](#) [MTi-670](#) [MTI-680G](#) [MTI-G-710-2A8G4](#)