


450W - 900W Modular power supply.

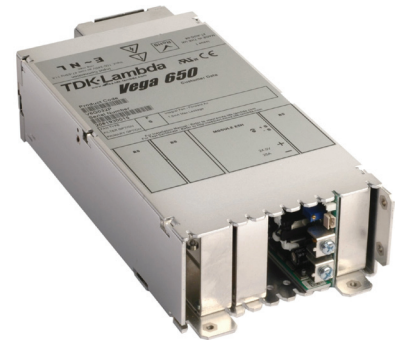

| Features | Benefits |
|------------------------------------|---|
| • Industry leading flexibility | Suits your application |
| • Screw, Fast-on or IEC connection | Simplifies design into system |
| • Worldwide safety approvals | Supports global use |
| • Up to 11 outputs | Eliminates need for additional supplies |
| • 3 year warranty | Low cost of ownership |

| Input | Vega 450, 650 and 900 | Vega dc (450W) |
|---------------------------|---|--|
| Input Voltage / Frequency | 90-264Vac / 47 - 63 Hz (440Hz with reduced PFC) 900W version is 150-264Vac only, 650W below 150Vac | 34 - 75Vdc derate linearly below 44V to 340W at 34V |
| Input Fuse | 16A / 250Vac HBC Fast acting (not user accessible) | 20A Fast acting (not user accessible) |
| Inrush Current | <40A at 25°C and 264Vac (cold start) | <40A at 25°C, ETSI EN300 132-2 |
| Leakage Current | See 'How To Create A Product Description' for details | n/a |

How To Create A Product Description

The extensive range of output modules and options make it possible to achieve almost any combination of Volts and Amps. You can create your own Vega configuration online at <https://config.emea.tdk-lambda.com/>. This method checks your configuration and offers the optimum solution. Alternatively, you can do this manually by using the guide below.

- Calculate total output power to select the appropriate converter, then select required Cooling, Connection, Leakage Current and Controls/ Signals from the following table:

| | | |
|-----------|----|--------------|
| Converter | V0 | 450W (dc in) |
| | V4 | 450W |
| | V6 | 650W |
| | V9 | 900W |

| | | | | |
|----|---|---|---|---|
| V4 | F | S | S | F |
|----|---|---|---|---|

| | | |
|----------------|-----------------------|-------------------------|
| Cooling | F | Forward air - standard |
| | Q _d | Forward air - Quiet |
| | R _a | Reverse air |
| | P _{ad} | Reverse air - Quiet fan |
| C _b | Customer air - no fan | |

| | | |
|------------------|----------------|--------------------|
| Input Connection | S | Screw |
| | F _d | Fast-on terminal |
| | I _d | IEC320 with switch |

| | | |
|-------------------|---|--|
| Primary Option | F | ac fail, psu+fan inhibit, 5V/100mA standby |
| | FV | ac fail, psu+fan inhibit, 5V/300mA standby |
| | xFW _{cd} | ac fail, psu+fan inhibit, 5-15V/1A standby |
| | E | ac fail, psu+fan enable, 5V/100mA standby |
| EV | ac fail, psu+fan enable, 5V/300mA standby | |
| xEW _{cd} | ac fail, psu+fan enable, 5-15V/1A standby | |

| | | |
|---|------|----------------|
| Leakage Current (max leakage current at 264Vac, 63Hz) | S | Standard 1.5mA |
| | M | 650µA |
| | L | 290µA |
| | R | 175µA |
| T | 60µA | |

- Select Output Modules and options from the output voltages tables.

Example - if you require 5.2V / 18A with output inhibit :-

 - Select B1H as closest match for voltage & current and prefix with voltage (eg **5.2B1H**)
 - add suffix 'S' or 'F' for Screw or Fast-on output connection (eg 5.2B1HS)
 - add suffix 'N' for output inhibit if required (eg 5.2B1HSN)
 - Repeat for other outputs.

Ensure you do not select more than a total of 5 slots width of modules. This will create a complete product description eg V6FSSF 5L1SN 12/12H3/3S 24C5S which represents a four output 650W Vega with Forward air, Screw terminal input, 1.5mA leakage, ac Fail, Global inhibit & 5V/100mA standby supply with the following outputs:
 Output 1 = 5V/35A (with output inhibit, module good and current share option). Output 2 = 12V / 10A, Output 3 = 12V / 6A, Output 4 = 24V / 10A, all with screw terminal outputs.
- Contact TDK-Lambda to validate configuration and issue a part number.

a) Not available for Vega 900
 b) Thermocoupled sample recommended to ensure adequate cooling - consult sales
 c) xFX and xEW options increase leakage current by 90µA. Replace 'x' with required output voltage (5FW = 5V standby supply)
 d) Not available for Vega dc

| OUTPUT VOLTAGES (single output modules) | | | | | OUTPUT VOLTAGES (twin output modules) | | | | | |
|---|--------------------------|---------------------|----------------|-------|--|---|----------------|---------------------------------------|---|-------|
| Module | Adjustment Range (Volts) | | Current (Amps) | Slots | Module | V1 Adjustment Range (Volts) | Current | V2 Adjustment Range (Volts) | Current (Amps) | Slots |
| B1L | 1.8 | - 3.8 _e | 20 | 1 | H1L/1L | | | 1.8 - 3.8 _n | 8 | 1 |
| C1 | 1.8 | - 4.1 _e | 35 | 1 | H1L/1H | | | 3.9 - 5.5 _d | 8 | 1 |
| C1Y | 1.8 | - 4.1 _e | 40 | 1 | H1L/2 | 1.8 - 3.8 _n | 12 | 5.6 - 9 _f | 6 | 1 |
| D1L | 1.8 | - 3.8 | 50 | 1.5 | H1L/3 | | | 9.1 - 16.2 _u | 6 | 1 |
| E1 | 1.8 | - 3.8 _e | 60 | 2 | H1L/4 | | | 16.3 - 25 _p | 4.5 | 1 |
| F1 _a | 1.8 | - 3.8 | 80 | 2 | H1H/1L | | | 1.8 - 3.8 _n | 8 | 1 |
| Z2 | 1.8 | - 3.8 _e | 95 | 3 | H1H/1H | | | 3.9 - 5.5 _d | 8 | 1 |
| Z3 | 1.8 | - 3.8 _e | 114 | 4 | H1H/2 | 3.9 - 5.5 _d | 12 | 5.6 - 9 _f | 6 | 1 |
| B1H | 3.9 | - 5.5 _d | 20 | 1 | H1H/3 | | | 9.1 - 16.2 _u | 6 | 1 |
| L1 | 4.2 | - 5.5 _d | 35 | 1 | H1H/4 | | | 16.3 - 25 _p | 4.5 | 1 |
| D2 | 3.8 | - 9 _k | 45 | 1.5 | H2/1L | | | 1.8 - 3.8 _n | 8 | 1 |
| D1H | 3.9 | - 5.5 _d | 50 | 1.5 | H2/1H | | | 3.9 - 5.5 _d | 8 | 1 |
| E2 | 3.8 | - 8 _k | 60 | 2 | H2/2 | 5.6 - 9 _f | 10 | 5.6 - 9 _f | 6 | 1 |
| Z18 | 4.2 | - 5.5 | 66 | 2 | H2/3 | | | 9.1 - 16.2 _u | 6 | 1 |
| F2 _a | 3.8 | - 8 | 75 | 2 | H2/4 | | | 16.3 - 25 _p | 4.5 | 1 |
| Z4 | 3.9 | - 5.5 _d | 95 | 3 | H3/1L | | | 1.8 - 3.8 _n | 8 | 1 |
| Z6 | 3.9 | - 5.5 _d | 104 | 3.5 | H3/1H | | | 3.9 - 5.5 _d | 8 | 1 |
| B2 | 5 | - 9 _f | 25 | 1 | H3/2 | 9.1 - 16.2 _u | 10 | 5.6 - 9 _f | 6 | 1 |
| B3 | 9.1 | - 16.2 _g | 12 | 1 | H3/3 | | | 9.1 - 16.2 _u | 6 | 1 |
| C3 | 9.1 | - 16.2 _g | 18 | 1 | H3/4 | | | 16.3 - 25 _p | 4.5 | 1 |
| D3 | 8 | - 16.5 _g | 24 | 1.5 | H5/1L | | | 1.8 - 3.8 _n | 8 | 1 |
| E3L | 8 | - 13.9 _i | 40 | 2 | H5/1H | | | 3.9 - 5.5 _d | 8 | 1 |
| Z7 | 8 | - 16.5 _g | 45 | 3 | H5/2 | 16.2 - 28 | 5 | 5.6 - 9 _f | 6 | 1 |
| EE2 | 7.6 | - 16 _g | 45 | 4 | H5/3 | | | 9.1 - 16.2 _u | 6 | 1 |
| D4 | 14 | - 21.5 _i | 18 | 1.5 | H5/4 | | | 16.3 - 25 _p | 4.5 | 1 |
| E4 | 14 | - 19.9 _m | 30 | 2 | Wide Range Programmable Modules | | | | | |
| E3H | 14 | - 15 | 36 | 2 | Module | Voltage Range | Current | Slots | | |
| C4 | 16.3 | - 21.5 _i | 14 | 1 | W2 _a | 0.25 _w - 7.5 | 30 | 1 | Select features from table below | |
| CC3 | 18.2 | - 32.4 _j | 18 | 2 | W5 | 0.25 _x - 32 | 8.5 | 1 | | |
| E5L _v | 20 | - 24 | 27 | 2 | Follow by | F or T Fixed or T Tracking Overvoltage protection F or S Fast-on or S Screw output terminals R or V Resistance (0-32kΩ) or V Voltage (0-5V) programming 1 Inhibit, Fixed Current Limit 1, 2, 3 or 4 2 Inhibit, Programmable Current Limit (0-5V) 3 Enable, Fixed Current Limit 4 Enable, Programmable Current Limit (0-5V) | | | | |
| B5 | 21.6 | - 31 _n | 6 | 1 | | | | | | |
| C5 | 21.6 | - 31 _j | 10 | 1 | | | | | | |
| D5 | 21 | - 28 | 15 | 1.5 | | | | | | |
| E5H _v | 24 | - 28 | 25 | 2 | | | | | | |
| Z19 _{co} | 24 | - 28 | 36 | 3.5 | | | | | | |
| HH5/3 | 25.3 | - 44.2 _b | 5 | 1 | | | | | | |
| DD4 | 28 | - 43 _s | 18 | 3 | | | | | | |
| EE4 _c | 28 | - 38 | 22.5 | 4 | Follow non wide range modules by F (Fast-on) or S (Screw) output terminals | | | | | |
| HH5/4 | 32.5 | - 53 _t | 4.5 | 1 | | | | | | |
| BB4 | 32.6 | - 43 _q | 10 | 2 | | | | | | |
| EE5L _{co} | 40 | - 48 | 18 | 4 | Options - Single output Modules* | | | Options - Twin output Modules* | | |
| C5B4 | 43 | - 48 | 10 | 2 | N | Output Inhibit, Module Good & Current Sharing | | | N Output Inhibit, Module Good & Remote Sense | |
| EE5H _o | 48 | - 56 | 18 | 4 | | | | | R Remote Sense only | |
| CC5 | 48.1 | - 62 _r | 10 | 2 | | | | | | |
| DD5 | 42 | - 56 | 15 | 3 | * see configuring guide | | | | | |

a) F1, F2 and W2 modules not for Vega 900
 b) 38V max for 900W
 c) Only available for Vega 900
 d) 5.1V max for 900W
 e) 3.4V max for 900W
 f) 8V max for 900W
 g) 15V max for 900W

h) 28V max for 900W
 i) 18V max for 900W
 j) 30V max for 900W
 k) 7.5V max for 900W
 l) 12.5V max for 900W
 m) 19V max for 900W
 n) 3.4V max for 900W

o) 'N' option not available
 p) 24V max for 900W
 q) 40V max for 900W
 r) 60V max for 900W
 s) 36V max for 900W
 t) 52V max for 900W
 u) 15.5V max for 900W

v) 'N' option not available if more than 1 module fitted
 w) 500mA min load below 1V
 x) 100mA minimum load below 2V

| Isolation | | |
|------------------------------------|------------|---|
| Input to Output | Reinforced | 2 x MOPPs (3rd edition 60601) - units without xFW or xEW primary option fitted 4kVac, 5.7kVdc type tested to 4kVac (equivalent to 5.7kVdc), production tested to 4.3kVdc. |
| Input to Earth | Basic | 1 x MOOP (3rd edition 60601) 2.3kVdc |
| Output to Output / Output to Earth | | 200Vdc |

| Output Specification | | |
|-----------------------------------|---------------------------|--|
| Voltage / Current | See output voltages table | |
| Turn on time | 1.5s max | at 90Vac (150Vac for 900W, 48Vdc for Vega dc) and 100% rated output power |
| Rise time | <50ms | to 90% of voltage, monotonic rise above 10% |
| Turn on overshoot | <5% or 250mV | Load type dependent, no overshoot with resistive load |
| Efficiency | up to 75% | at 230Vac (48Vdc for Vega dc) & 100% rated power, configuration dependent |
| Hold up | 16ms min | at 90Vac (150Vac for 900W) and 100% rated power (10ms min for Vega dc) |
| Ripple and Noise | <1% or 50mV | pk-pk, using EIAJ test method & 20MHz bandwidth |
| Voltage Accuracy | <1% | of set voltage |
| Remote Sense | Yes | standard on single output modules, max 0.75V total line drop. Option for twin output modules |
| Minimum Load | No | on any output (except W2 and W5 modules which need 0.5A load to achieve full specification) |
| Temperature Coefficient | <0.02% | of rated voltage per °C |
| Load Regulation | <0.5% or 50mV | for 0-100% load change |
| Line Regulation | <0.1% | for 90-264Vac input change (34 - 75Vdc for Vega dc) |
| Cross Regulation | <0.2% | for 100% load change on any output |
| Transient Response | <6% or 300mV | of set voltage for 50% load change (above 25% load) |
| Recovery | 500µs | for recovery to 1% or 100mV of set voltage |
| Over Voltage Protection | Yes | Refer to application notes for details |
| Over Current Protection (singles) | 105-125% 110-170% | of rated current, constant current characteristic For EE2, EE4, EE5L, EE5H, Z2, Z18 and Z19 modules |
| Short Circuit Protection | <150% | of rated current, when output voltage <1% |
| Over Temperature Protection | Yes | shuts down all outputs and fan. Cycle ac off/on to reset Shutdown temperature varies according to ambient, output power and input voltage. ac fail signal (if fitted) provides 5ms warning of thermal shutdown |

| Environment | |
|------------------|--|
| Temperature | 0°C to 65°C operational, -40°C to 70°C storage (max 12 months). |
| Derating | 50°C to 65°C derate total output power and each output current by 2.5% per °C |
| Low Temp Startup | -20°C |
| Humidity | 5 - 95% RH non condensing |
| Shock | ±3 x 30g shocks in each plane, total 18 shocks 30g shock = 11ms (+/-0.5msec), half sine Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987. Conforms to MIL-STD-810E/F, Method 516.5, Pro I, IV, VI |
| Vibration | Single axis 10 - 500 Hz at 2g (sweep and endurance at resonance) in all 3 planes Conforms to EN60068-2-6, IEC68-2-6 Conforms to MIL-STD-810E, Method 514.4, Pro I, Cat 1, 9 |
| Altitude | 5000 metres operational/non operational (IEC inlet 3000m operational, 5000m non operational) |
| Pollution | Degree 2, Material group IIIb |
| IP Rating | IP 10 |

Emissions EN61000-6-3:2007, EN60601-1-2:2001



| | | |
|-------------------------|------------------|--|
| Radiated Electric Field | EN55011, EN55032 | (as per CISPR.11/22) Class B (Class A for Vega dc), FCC47 part 15 subpart B see application note for details. Additional filtering required for IEC inlet version. Only for 'S' type leakage variants. |
| Conducted Emissions | EN55011, EN55032 | (as per CISPR.11/22) Class B (Class A for Vega dc), FCC47 part 15 subpart B Only for 'S' type leakage variants. 'M' and 'L' types meet Class A |
| Conducted Harmonics | EN61000-3-2 | Class A - not applicable to Vega dc |
| Flicker | EN61000-3-3 | Compliant - d_{max} only - not applicable to Vega dc |

Immunity EN61000-6-2:2005, EN60601-1-2:2001

| | | | | Criteria |
|---|--------------|--------------------------------|--|-----------------------------|
| Electrostatic Discharge | EN61000-4-2 | Level 4 | Air discharge 15kV, Contact discharge 8kV | A |
| Electromagnetic Field | EN61000-4-3 | Level 3 | 12V/m | A |
| Fast / Burst Transient | EN61000-4-4 | Level 4 Level 3 for Vega dc | ac input tested to 4.4kV (2kV for Vega dc) dc output tested to 2.2kV (1kV for Vega dc) Tested at 5kHz and 100kHz | A |
| Surge Immunity | EN61000-4-5 | Level 3 Level 2 for Vega dc | Common mode - 2.2kV (1.1kV for Vega dc) Differential - 1.1kV (0.55kV for Vega dc) | A |
| Conducted RF Immunity | EN61000-4-6 | Level 3 | 12V | A |
| Power Frequency Magnetic Field | EN61000-4-8 | Level 4 | 30A/m | A |
| Voltage Dips, Variations, Interruptions | EN61000-4-11 | Class 3 na - Vega dc | | A B for 5s interruptions |



Approvals / Accreditations

| | |
|--|---|
| IEC/EN 62368-1, UL62368-1 / CSA 22.2 No 62368-1 | File E135494 |
| IEC/EN 60950-1, UL60950-1 / CSA 22.2 No 60950-1 | File E135494 |
| IEC/EN 60601-1, UL/CSA 60601-1, ANSI/AAMI ES60601-1 CAN/CSA-C22.2 No 60601-1-08 | File E349607 (not Vega dc, only for L, R and T leakage variants) |
| IEC/EN 61010-1 | File E331788 |
| CE Mark (EN62368-1) | Low Voltage Directive (LVD), electromagnetic compatibility (EMC) and Restriction of Hazardous Substances (RoHS) |
| CB certificate and Report available on request | <i>Please check with technical sales for status of approvals</i> |
| Designed and manufactured under the control of ISO9001 and ISO13485 (including risk management). | |


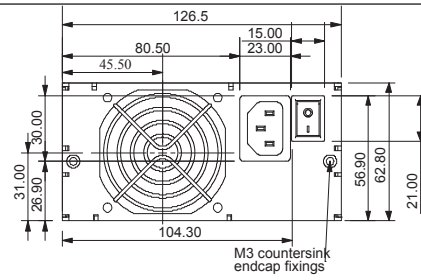
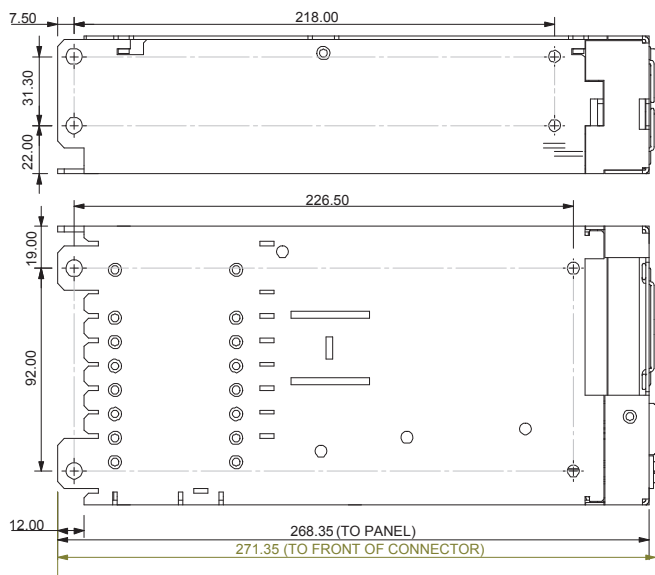


IEC-320 Connector Case


All versions have:-
8 x M4 Customer fixings
Max thread penetration:- 4.5mm

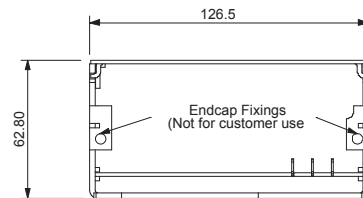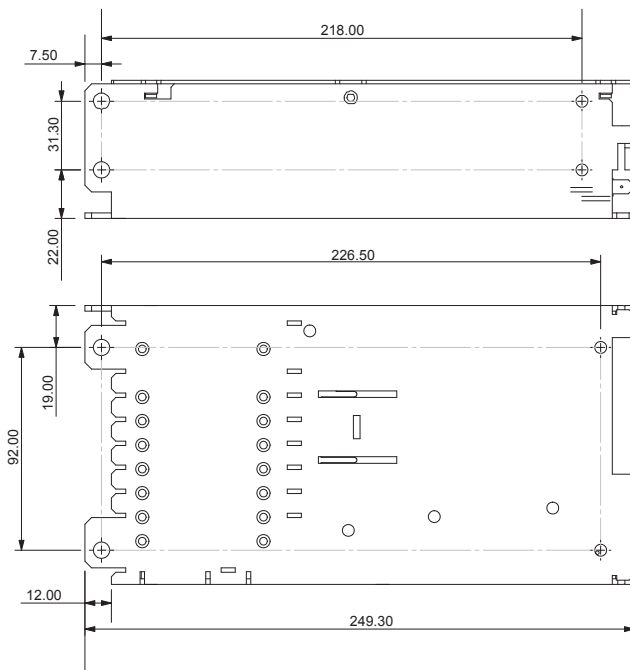

Customer Air Case (no fan)

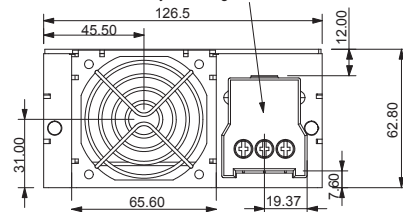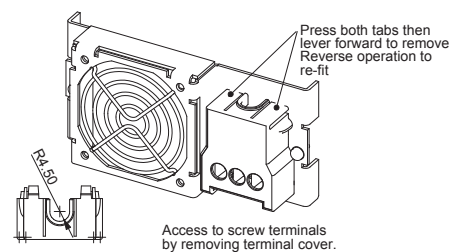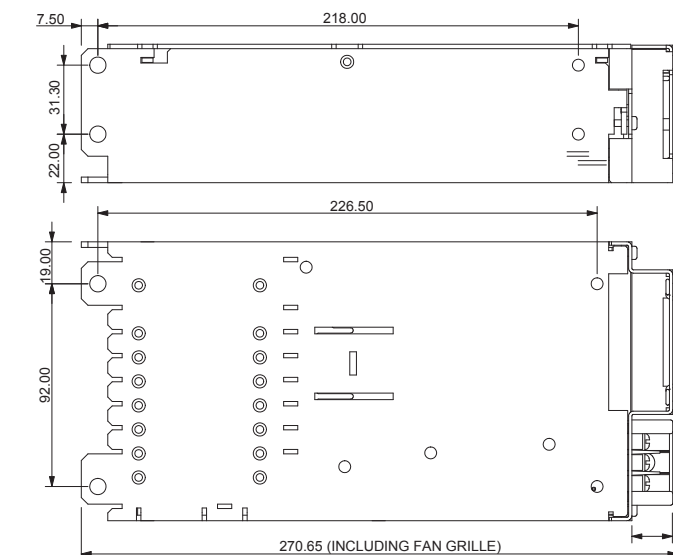

Screw & Fast-on Terminal Case

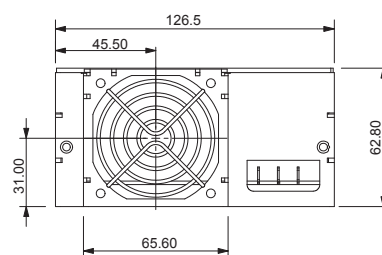



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
info.germany@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
powersolutions@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
info@tdk-lambda.co.il
www.emea.lambda.tdk.com/il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.emea.lambda.tdk.com/ru



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
powersolutions@us.tdk-lambda.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
powersolutions@cn.tdk-lambda.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tfs.mkt@sg.tdk-lambda.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@in.tdk-lambda.com
www.sg.lambda.tdk.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Power Supplies](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[73-147-000](#) [73-270-000](#) [73-316-4020](#) [73-317-0005](#) [73-495-0333](#) [73-951-0001C](#) [73-961-4086-G2](#) [GLD150-48-103-G](#) [OVS-12F](#) [OVS-12J](#)
[OVS-15J](#) [IVS13Q2Q1F4LL030ANJCUNR32](#) [LB115S48KH](#) [FP2-PSA1](#) [IMP4-3O1-2J1-05-B-662](#) [UPS40-3003](#) [LB240S48KH](#) [LMM409](#)
[CHASSIS](#) [VAS003ZG](#) [73-166-000](#) [73-271-000](#) [73-961-0048](#) [73-961-4085-G2](#) [73-962-0001](#) [OVS-15G](#) [1-155777G](#) [OVS-24F](#) [73-551-5086](#)
[73-713-001](#) [73-769-003](#) [73-540-0001](#) [DUAL OUTPUT CABLE SET](#) [73-560-434](#) [73-956-0001S-G2](#) [73-963-0048-G2](#) [73-963-0024-G2](#) [73-](#)
[317-0048](#) [73-495-0555](#) [AC6-02C2C-02-R](#) [NV722736](#) [VA-A2104827](#) [MVX-G2771015](#) [AC4-OOT2B-00](#) [VA-D1139247](#) [MVX-E2973822](#)
[451-002145-0000](#) [ACV15N3](#) [CVN300-96P01A](#) [NFN40-7942](#) [SS500-3405-401](#)