

# MiniSense 100 Analog PCB

Evaluation Circuit for Vibration Sensor  
Low Power – Battery Powered  
LED for Trigger  
High Sensitivity  
Analog and Digital Signal Access  
Points



**The LDTC MiniSense 100 Analog PCB** provides a simple way to evaluate the LDTC MiniSense 100. The unit consists of LDTC MiniSense 100, a low-power operation amplifier, comparator, and DC/DC converter, and passive components used in signal conditioning. The sensor and circuit are assembled on a double-sided PCB with test points, ON/OFF switch, and 0.100" plated through holes for easy user interface. The PCB has adjustable gain and demonstrates the basic capabilities of LDTC MiniSense 100 vibration sensor.

## FEATURES

- Signal Conditioned Vibration Sensor
- High Pass Filter @ 1.3Hz
- Low Pass Filter @ 177Hz
- On Board 3.3 Battery or User Power Supply
- Both Analog and Digital Output

## APPLICATIONS

- Wake-up Sensor
- Drop Detection Sensor
- Flow Sensor
- Activity Sensor
- Alarm Trigger

## specifications

CHARACTERISTIC	SYMBOL	MIN	TYP	MAX	UNITS
<b>(T=25(C))</b>					
Lower Frequency Limit (-3dB Point)	$f_{L3dB}$	-	1.3	-	Hz
High Frequency Limit (-3dB Point)	$f_{U3dB}$	-	117	-	Hz
External Supply Voltage	+V	0.9	3.3	5.5	VDC
Supply Current	I <sub>supply</sub>	-	2.8	-	mA

## pin descriptions


PIN NUMBER	NAME	DESCRIPTION
1	VDD	Connect to Power Supply
2	A	Analog Signal output
3	D	Digital Signal output
4	GND	Connect to GND

**\*\*Note:** when switch set to "OFF", PCB uses external power if applied to (+) & (-) input pins\*\*


## environmental characteristics

CHARACTERISTICS	SYMBOL	MIN	TYP	MAX	UNITS
<b>T=25(C)</b>					
Operating Temperature	TOP	-20	-	+85	°C
Storage Temperature	TS	-40	-	+105	°C
Relative Humidity	RH	0	-	90	%R.H

## electrical schematic

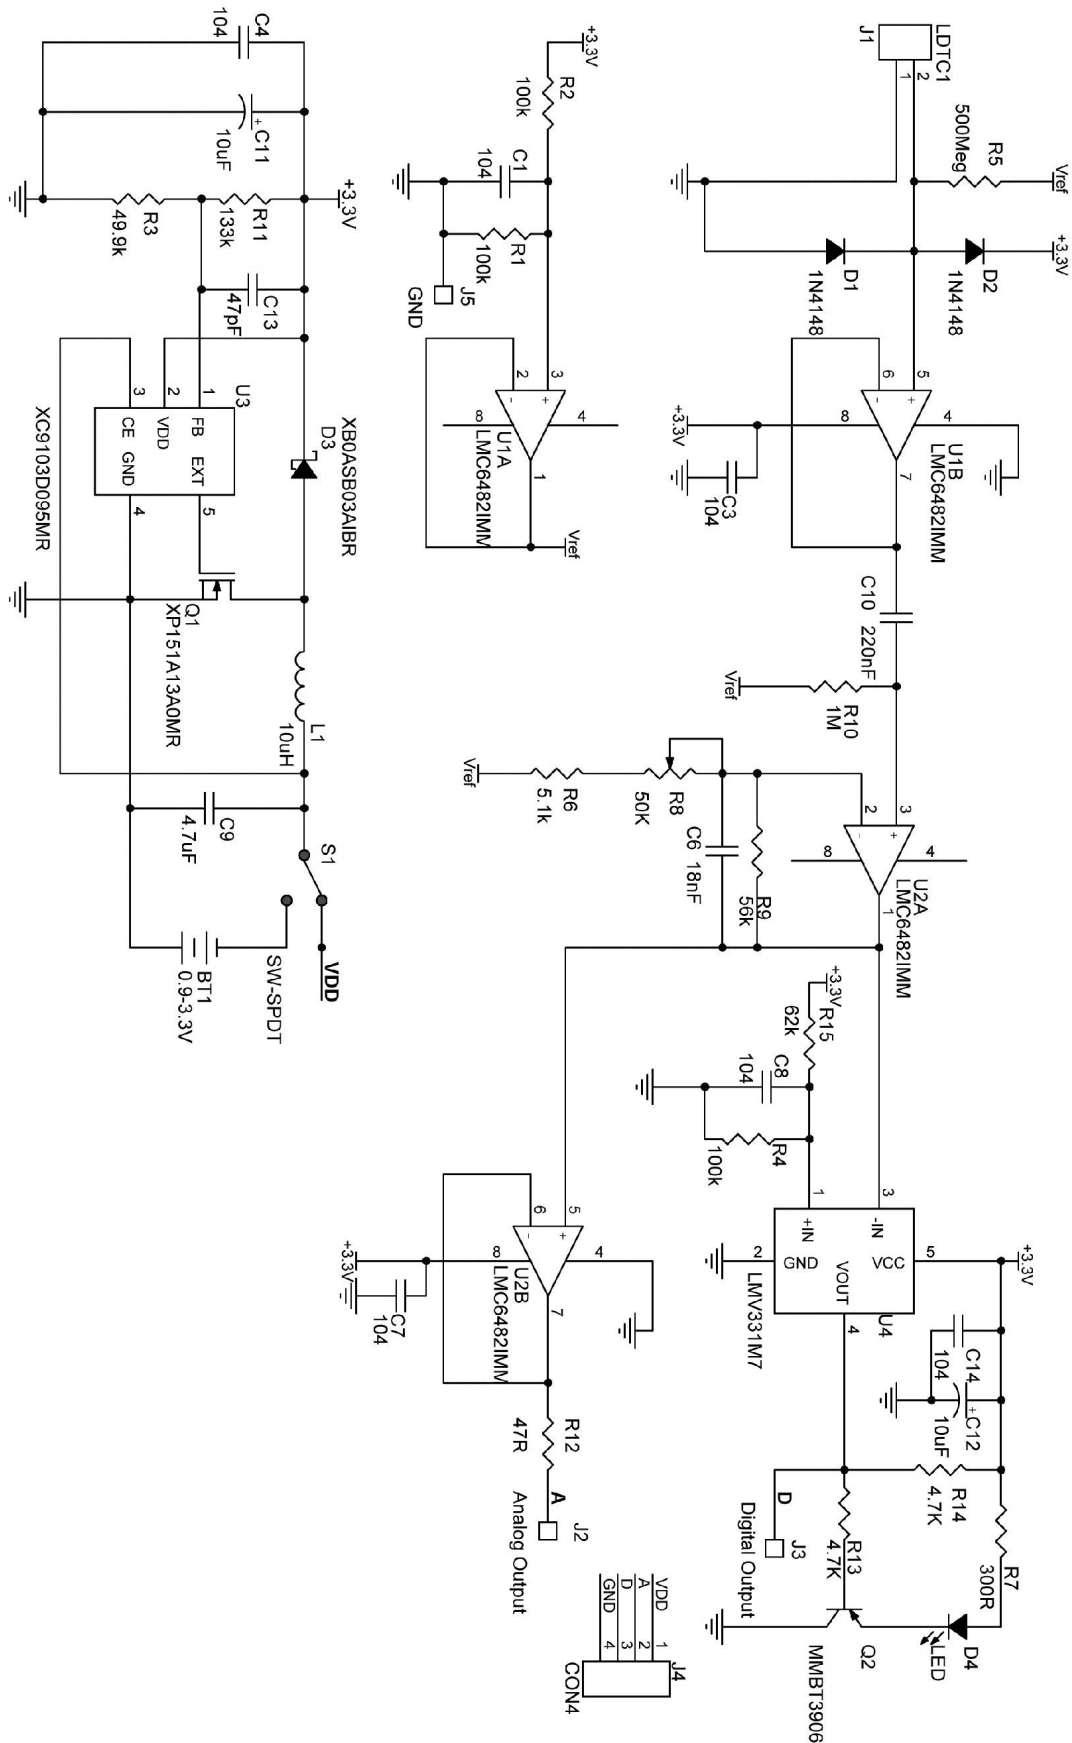

## electrical PCB reference

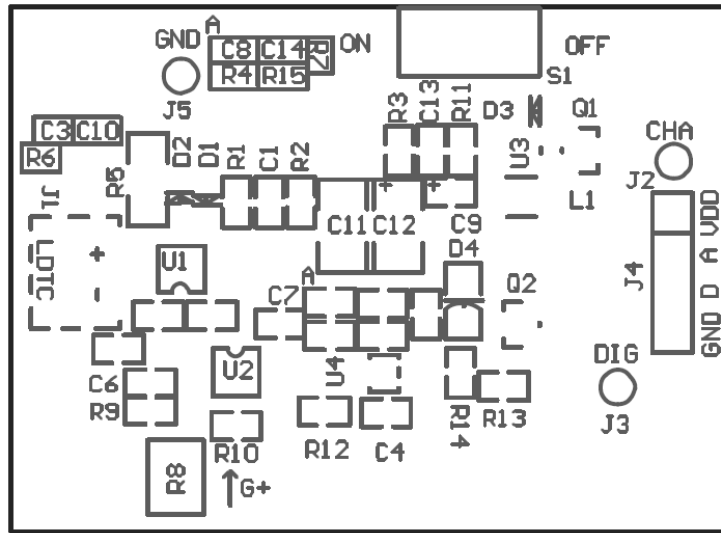


## electrical PCB description

The impedance matching resistor, R5, in parallel with the 240pF sensor capacitance, establishes the high pass input filter at approximately 1.3Hz ( $f=1/2\pi RC$ ). After impedance buffering the LDTC signal is DC coupled to a gain stage through a 0.7Hz high pass filter formed by C10 and R10. The amplifier gain is set by R9, R6, and the R8 potentiometer in the OP-amp's feedback loop:  $\text{Gain}=1+ [R9/(R8+R6)]$  with a max gain of 20dB, min gain of 6dB. C6 in parallel with R9 in the feedback loop form a low pass filter with a corner frequency of 177Hz.


After signal conditioning the analog voltage is buffered for output and also fed into a comparator. R15 & R4 set the threshold voltage. If the amplified signal exceeds the threshold voltage, the comparator output will be pulled low through a 4.7K resistor and the PNP transistor will turn on the LED. The reference voltage, VREF, is 1.65V, or half of the internal 3.3V rail. The on board 3.3V battery and external power are converted to a 5V supply using a DC-DC converter.

## frequency response

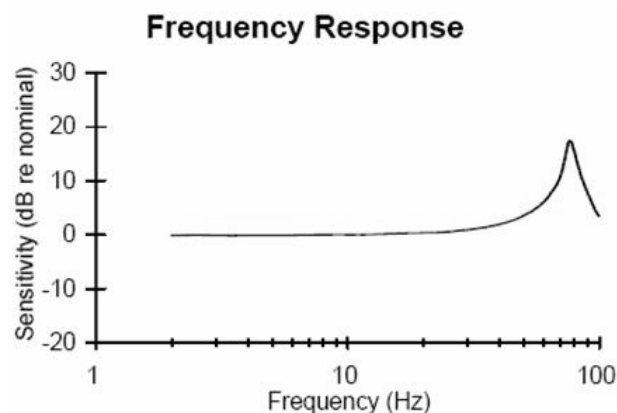

Minisense 100 vibration sensor frequency response

## MiniSense 100 vibration sensor Analog PCB Acceleration Response

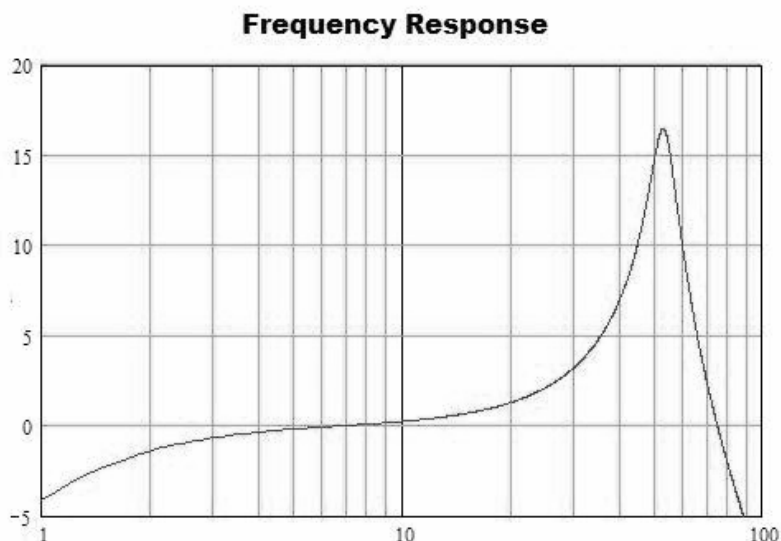

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

## ordering information

### Description

### Part Number

MiniSense 100 Analog PCB

1007215

#### North America

Measurement Specialties, Inc.  
1000 Lucas Way  
Hampton, VA 23666  
Sales and Customer Service  
Tel: +1-800-745-8008 or  
+1-757-766-1500  
Fax: +1-757-766-4297  
Technical Support  
Email: [piezo@meas-spec.com](mailto:piezo@meas-spec.com)

#### Europe

MEAS Deutschland GmbH  
Hauert 13  
44227 Dortmund  
Germany  
Sales and Customer Service  
Tel: +49 (0)231 9740 21  
Technical Support  
Tel: +49 (0)6074 862822  
Email: [piezoeurope@meas-spec.com](mailto:piezoeurope@meas-spec.com)

#### Asia

Measurement Specialties (China), Ltd.  
No. 26 Langshan Road  
ShenZhen High-Tech Park (North)  
Nanshan District  
ShenZhen, China 518107  
Sales and Customer Service  
Tel: +86 755 3330 5088  
Technical Support  
Email: [piezo@meas-spec.com](mailto:piezo@meas-spec.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Position Sensor Development Tools](#) *category:*

*Click to view products by* [TE Connectivity](#) *manufacturer:*

Other Similar products are found below :

[AS5115 PB](#) [AS5215 AB](#) [STEVAL-MKI043V1](#) [EVB90340-LDC-200-Rev1.0](#) [STEVAL-STWINMAV1](#) [1032](#) [178](#) [DPP401Z000](#) [EVAL-ADXRS453Z-M](#) [EVAL-ADXRS453Z-V](#) [1007214-3](#) [STEVAL-MKI045V1](#) [STEVAL-MKI042V1](#) [STEVAL-MKI037V1](#) [IMX-070](#) [164](#) [EVAL-KIT DMU381ZA-400](#) [OpenIMU300RI EVK](#) [OpenIMU330BI EVK](#) [3595](#) [AS5200L-MF\\_EK\\_AB](#) [AS5215 DB](#) [AS5600L-SO\\_EK\\_AB](#) [AS5600L-WL\\_EK\\_AB](#) [AS5715-TS\\_EK\\_AB](#) [AS5X47D-TO\\_EK\\_ST](#) [TRK-1T02-E](#) [ADIS16265/PCBZ](#) [ADIS16260/PCBZ](#) [ADIS16477-1/PCBZ](#) [ADIS16477-3/PCBZ](#) [EVAL-ADIS2Z](#) [EVAL-ADXRS450Z-S](#) [EVAL-ADXRS453Z](#) [EVAL-ADXRS453Z-S](#) [EVAL-ADXRS646Z](#) [EVAL-ADXRS800Z-EY](#) [EVAL-ADXRS800Z-M](#) [EVAL-ADXRS800Z-RG](#) [EVAL-CN0341-SDPZ](#) [ATBNO055-XPRO](#) [DFR0027](#) [DFR0053](#) [DPP401A000](#) [EVB90365-Rev1.0](#) [EVB90371-GDC-100-Rev1.0](#) [EVB90371-GDC-200-Rev1.0](#) [EVB90371-GDC-300-Rev1.0](#) [EVB90371-GGO-100-Rev1.0](#) [EVB90371-GGO-200-Rev1.0](#)