

## ANT-915-VHETH

### 915 MHz Helical Antenna

The ANT-915-VHETH antenna is a compact surface mount helical antenna for low-power, wide-area (LPWA) applications including LoRaWAN®, remote controls, and ISM band applications in the 902 MHz to 930 MHz range.

The ANT-915-VHETH antenna is made from 0.6 mm diameter nickel plated high-carbon steel for use in PCB-mount installations requiring a rugged, compact and omnidirectional embedded antenna.

The connector-style base of the antenna ensures proper mounting for uniform performance in high-volume manufacturing.

#### FEATURES

- Performance at 902 MHz to 930 MHz
  - VSWR:  $\leq 2.3$
  - Peak Gain: 0.9 dBi
  - Efficiency: 58%
- Direct PCB attachment
- Reflow- or hand-solder assembly
- Omnidirectional radiation pattern
- Compact size
  - 44.3 mm x 7.0 mm x 7.0 mm

#### APPLICATIONS

- Low-power, wide-area (LPWA) applications
  - LoRaWAN®
- ISM applications
- Remote control, sensing and monitoring
  - Security systems
  - Industrial machinery
  - Automated equipment
  - AMR (automated meter reading)
- Internet of Things (IoT) devices
- Smart Home networking

#### ORDERING INFORMATION

Part Number	Description
ANT-915-VHETH	915 MHz helical antenna with connector-style PCB-mount base
AEK-915-VHETH	915 MHz helical antenna evaluation kit

Available from Linx Technologies and select distributors and representatives.

## TABLE 1. ELECTRICAL SPECIFICATIONS

ANT-915-VHETH	915 MHz
Frequency Range	902 MHz to 930 MHz
VSWR (max)	2.3
Peak Gain (dBi)	0.9
Average Gain (dBi)	-2.5
Efficiency (%)	58
Polarization	Linear
Radiation	Omnidirectional
Max Power	15 W
Wavelength	1/4-wave
Electrical Type	Monopole
Impedance	50 $\Omega$
ESD Sensitivity	NOT ESD sensitive. As a best practice, Linx may use ESD packaging.


Electrical specifications and plots measured with a 100 mm x 100 mm (3.94 in x 3.94 in) reference ground plane.

## TABLE 2. MECHANICAL SPECIFICATIONS

Parameter	Value
Connection	Solder pin
Operating Temperature Range	-40 °C to +80 °C
Weight	0.4 g (0.01 oz)
Dimensions	44.3 mm x 7.0 mm x 7.0 (1.75 in x 0.28 in x 0.28 in)

## PRODUCT DIMENSIONS

Figure 1 provides dimensions for the ANT-915-VHETH antenna.

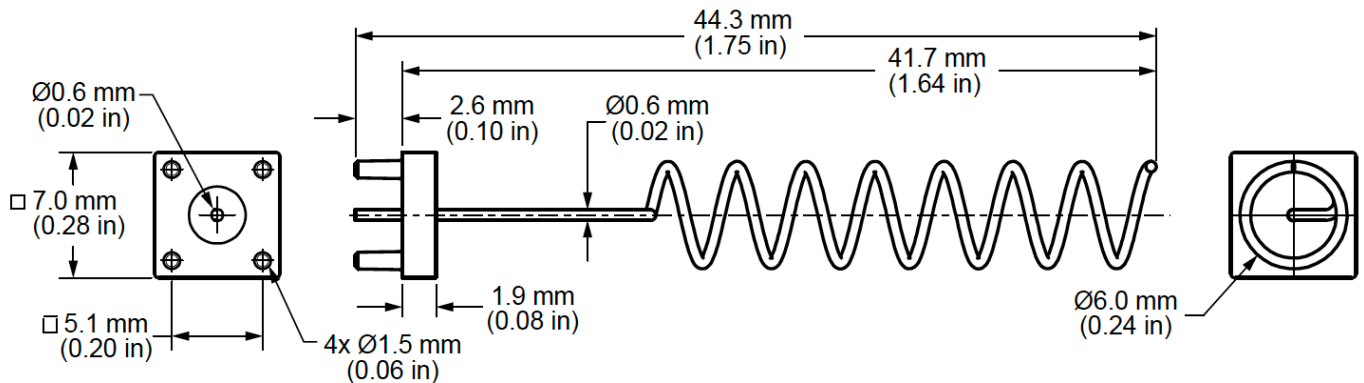

## VSWR

Figure 2 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

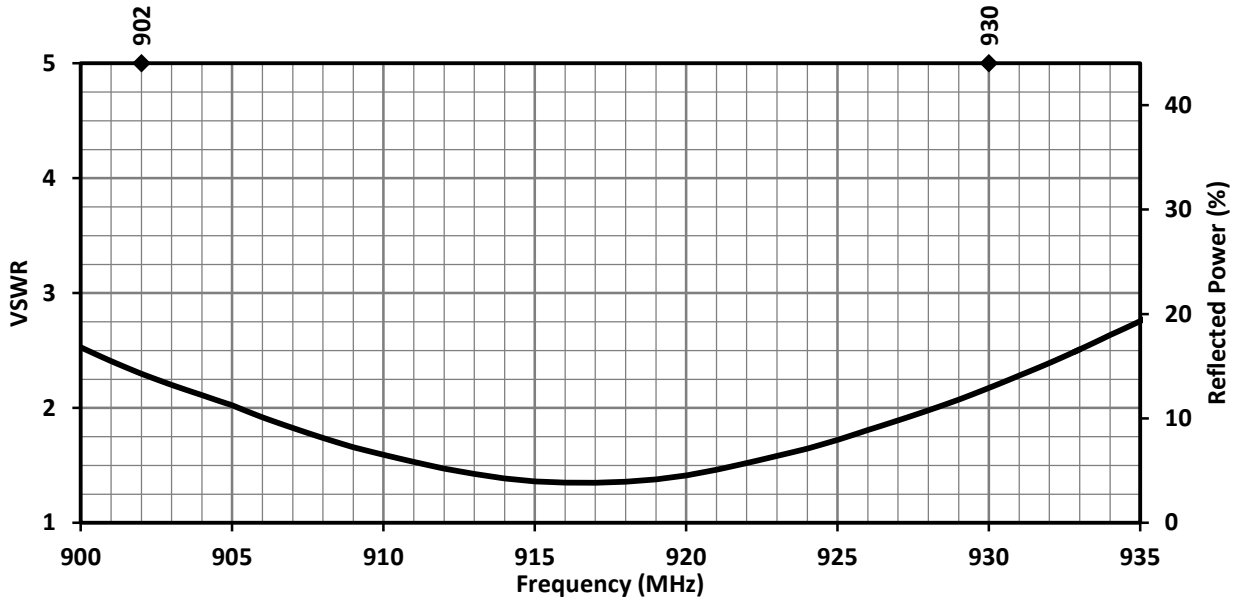


Figure 2. ANT-915-VHETH Antenna VSWR

## RETURN LOSS

Return loss (Figure 3), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

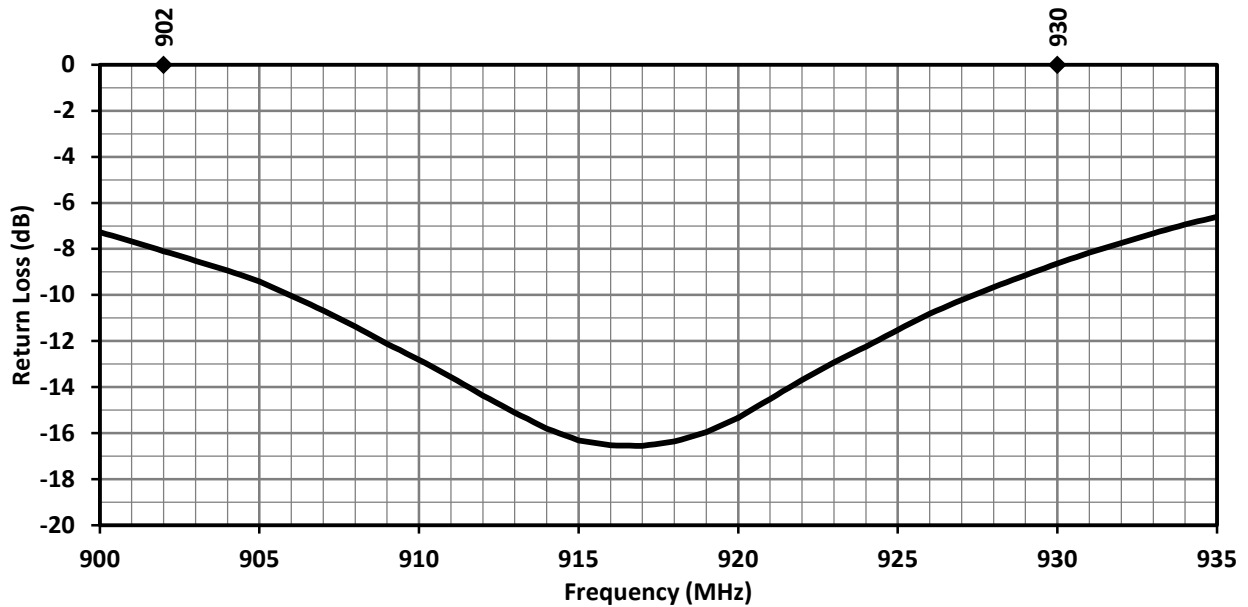


Figure 3. ANT-915-VHETH Antenna Return Loss

## PEAK GAIN

The peak gain across the antenna bandwidth is shown in Figure 4. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

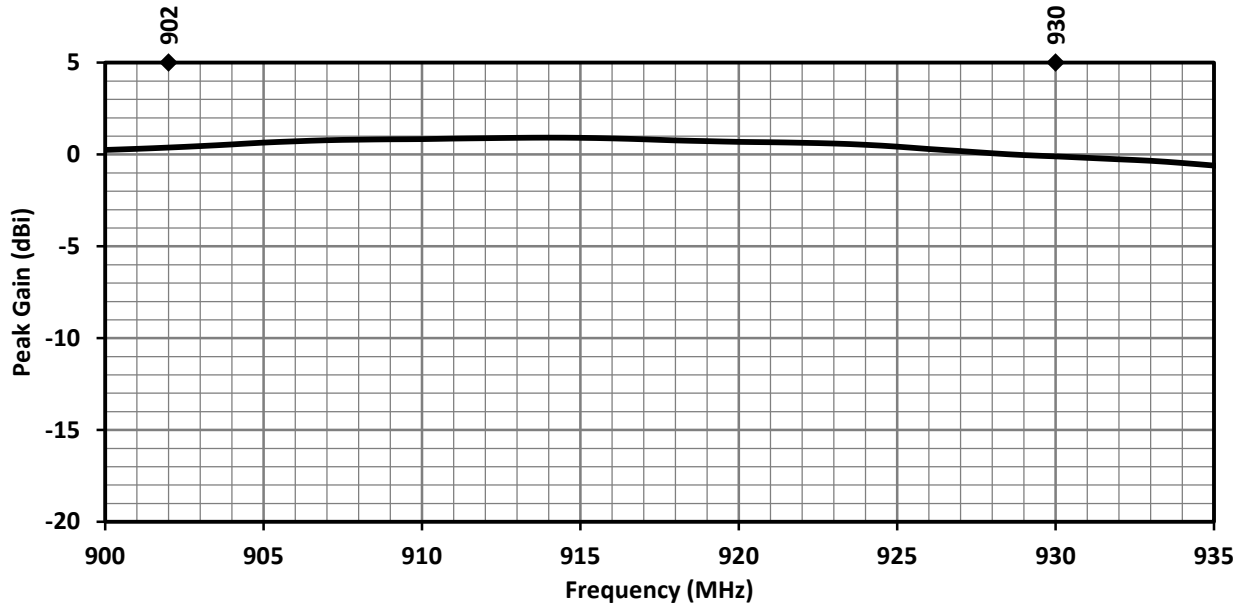


Figure 4. ANT-915-VHETH Antenna Peak Gain

## AVERAGE GAIN

verage gain (Figure 5), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

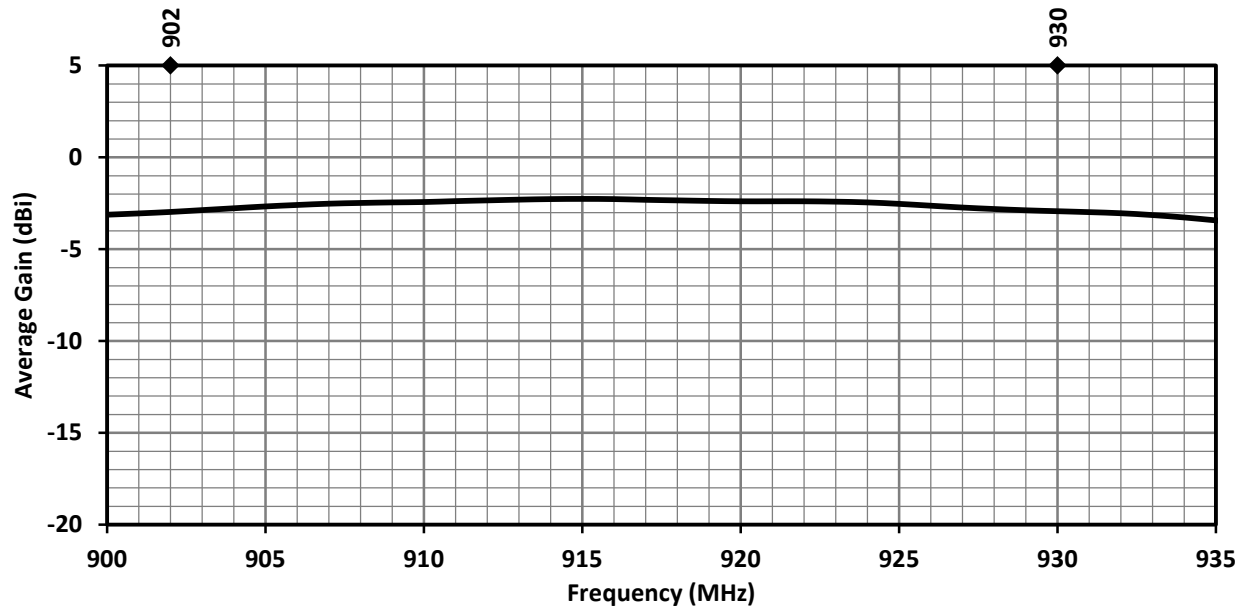


Figure 5. ANT-915-VHETH Antenna Average Gain

## RADIATION EFFICIENCY

Radiation efficiency (Figure 6), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.


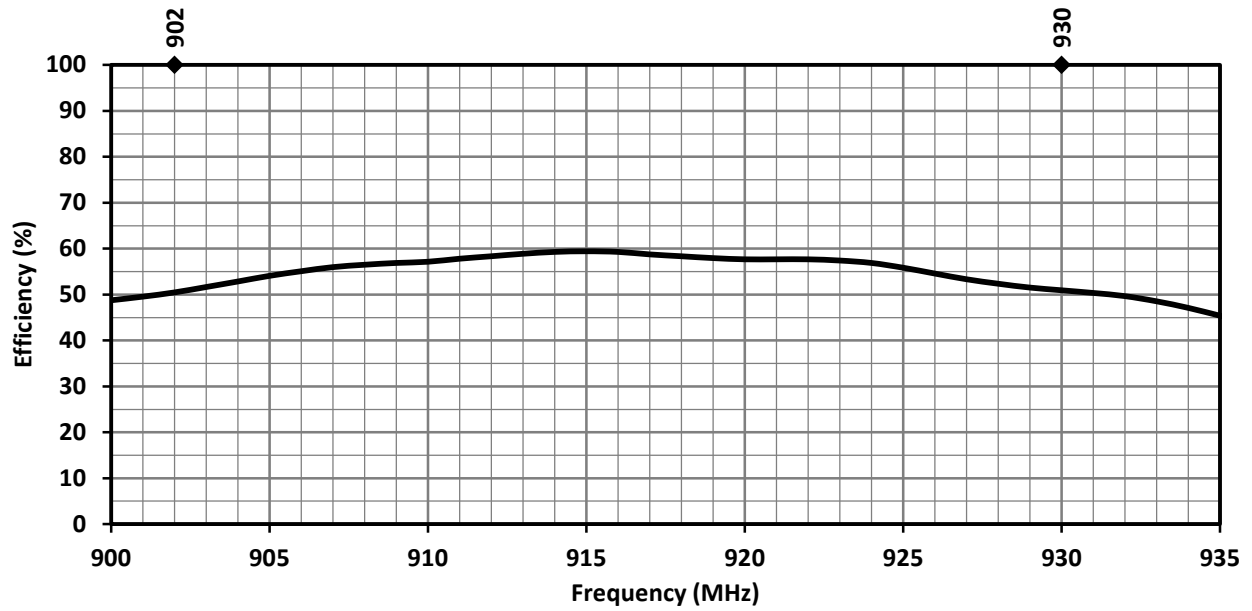


Figure 6. ANT-915-VHETH Antenna Radiation Efficiency

## RADIATION PATTERNS

Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns are shown in Figure 7 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.

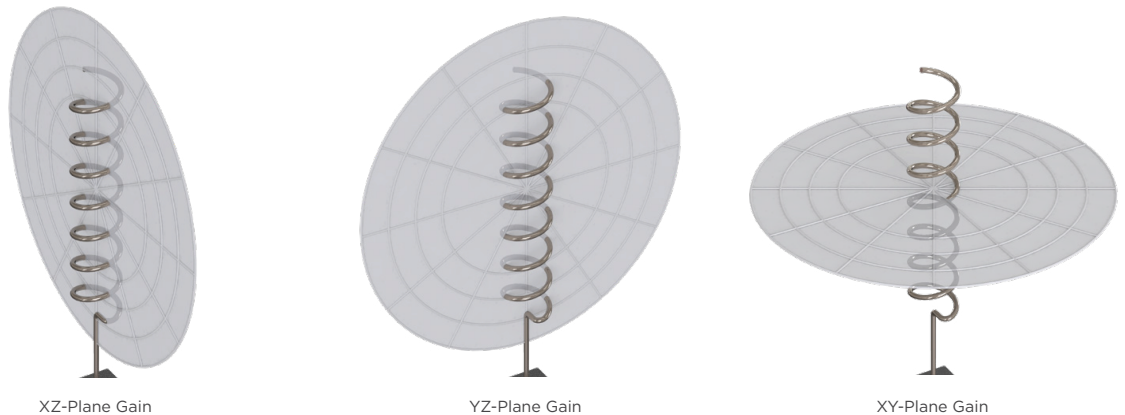

## 902 MHZ TO 930 MHZ (915 MHZ)

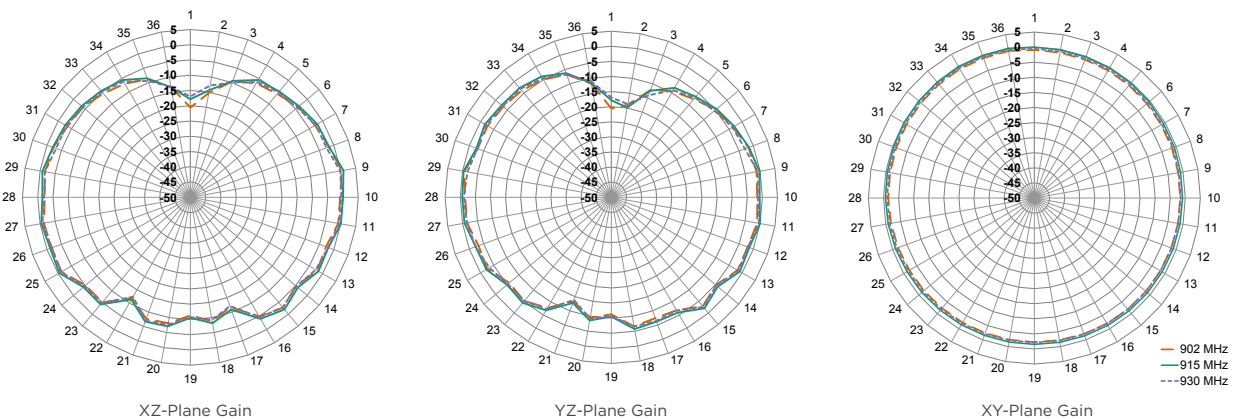


Figure 7. ANT-915-VHETH Antenna Radiation Patterns

## GROUND PLANE

1/4-Wave monopole antennas require an associated ground plane counterpoise for proper operation. The size and location of the ground plane relative to the antenna will affect the overall performance of the antenna in the final design. When used in conjunction with a ground plane smaller than that used to tune the antenna, the center frequency typically will shift higher in frequency and the bandwidth will decrease. The proximity of other circuit elements and packaging near the antenna will also affect the final performance.

For further discussion and guidance on the importance of the ground plane counterpoise, please refer to Linx Application Note, AN-00501: Understanding Antenna Specifications and Operation.

## RECOMMENDED LAYOUT

The recommended printed circuit board (PCB) layout for the ANT-915-VHETH antenna is shown in Figure 8. Contact Linx for availability of PCB layout design files. Linx offers an antenna evaluation board, AEK-915- VHETH, using the recommended layout.

The recommended layout includes a matching network, ground plane and PCB transmission line from the antenna to the matching network, and to the connector or radio circuitry. The connector used on the evaluation board is not intended for production use of the ANT-915-VHETH, the transmission line may be run directly to the radio if on the same PCB.

Linx recommends inclusion of at least a 3-element, surface mount pi matching network of two parallel components, (X1, X3) and one serial component, (X2) in all designs (Figure 9). Surface mount components should be 0603 size. 0402 size components are also supported. The ANT-915-VHETH antenna requires external components for impedance matching and further matching may improve end-product antenna performance depending on the effects of the enclosure, PCB and other electronic components. Linx believes in wireless made simple® and offers matching network design support.

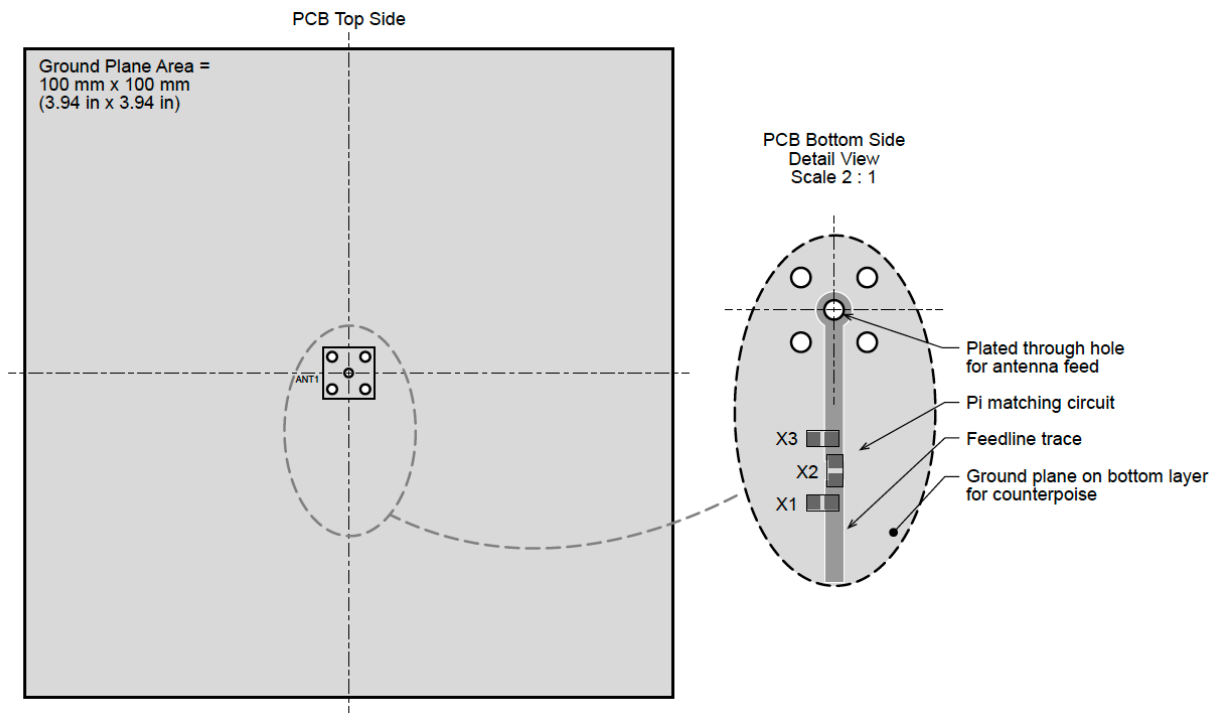


Figure 8. ANT-915-VHETH Recommended Layout

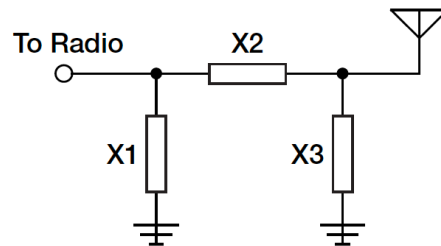


Figure 9. Matching Network Recommendation

## MATCHING NETWORK

The performance of the ANT-915-VHETH antenna shown in this datasheet derives from use of the 2-element impedance matching network, (Figure 9) using the components listed in Table 3. These components should serve as a starting place for matching in design.

Component	Value	Unit	Tolerance
X1	Not used (do not populate)	-	-
X2 (capacitor)	2.7	pF	10%
X3	Not used (do not populate)	-	-

Table 3. Matching Network Component Specifications

## RECOMMENDED PCB FOOTPRINT

Figure 10 shows the recommended printed circuit board footprint and spacing for the ANT-915-VHETH antenna. The footprint recommendation should be used in conjunction with the recommended layout configuration shown in Figure 8.

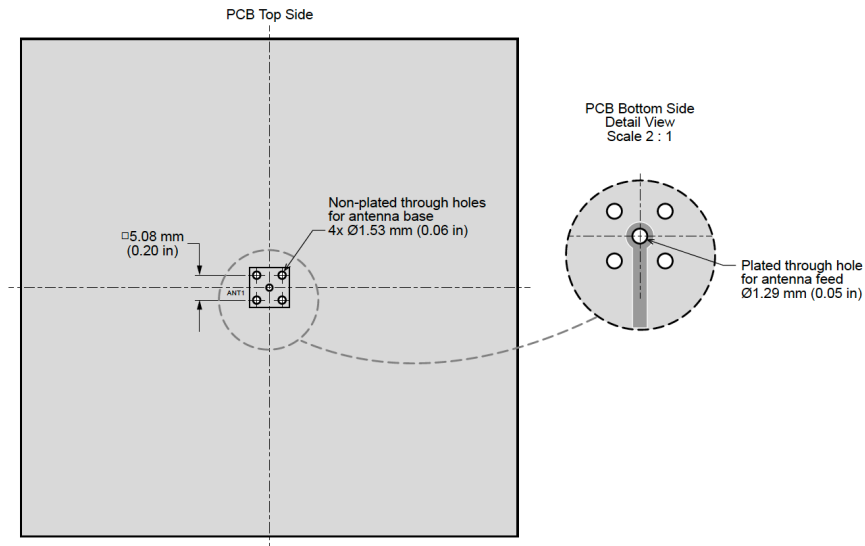


Figure 10. ANT-915-VHETH Antenna Placement on PCB

## TRANSMISSION LINES FOR EMBEDDED ANTENNAS

For most designs, Linx recommends a microstrip transmission line for the ANT-915-VHETH antenna. A microstrip transmission line is a PCB trace that runs over a ground plane to maintain the characteristic impedance for optimal signal transfer between the antenna and radio circuitry. Linx designs all antennas with a characteristic impedance of 50  $\Omega$ .

Important practices to observe when designing a transmission line are:

- Keep all transmission lines to a minimum length for best signal performance
- Use RF components that also operate at a 50  $\Omega$  impedance
- If the radio is not on the same PCB as the antenna, the microstrip should be terminated in a connector, enabling a shielded cable to complete the antenna connection to the radio
- For designs subject to significant electromagnetic interference, a coplanar waveguide transmission line may be used on the PCB

The design of a PCB transmission line can be aided by many commercially available software packages which can calculate the correct transmission line width and gap dimensions based upon the PCB thickness and dielectric constant used. Linx offers PCB design reviews to help optimize solution performance.



## REFLOW SOLDER PROFILE

The ANT-915-VHETH uses a typical RoHS solder reflow profile as shown in Figure 11. Refer to application note AN-00504 on the Linx website for more information.

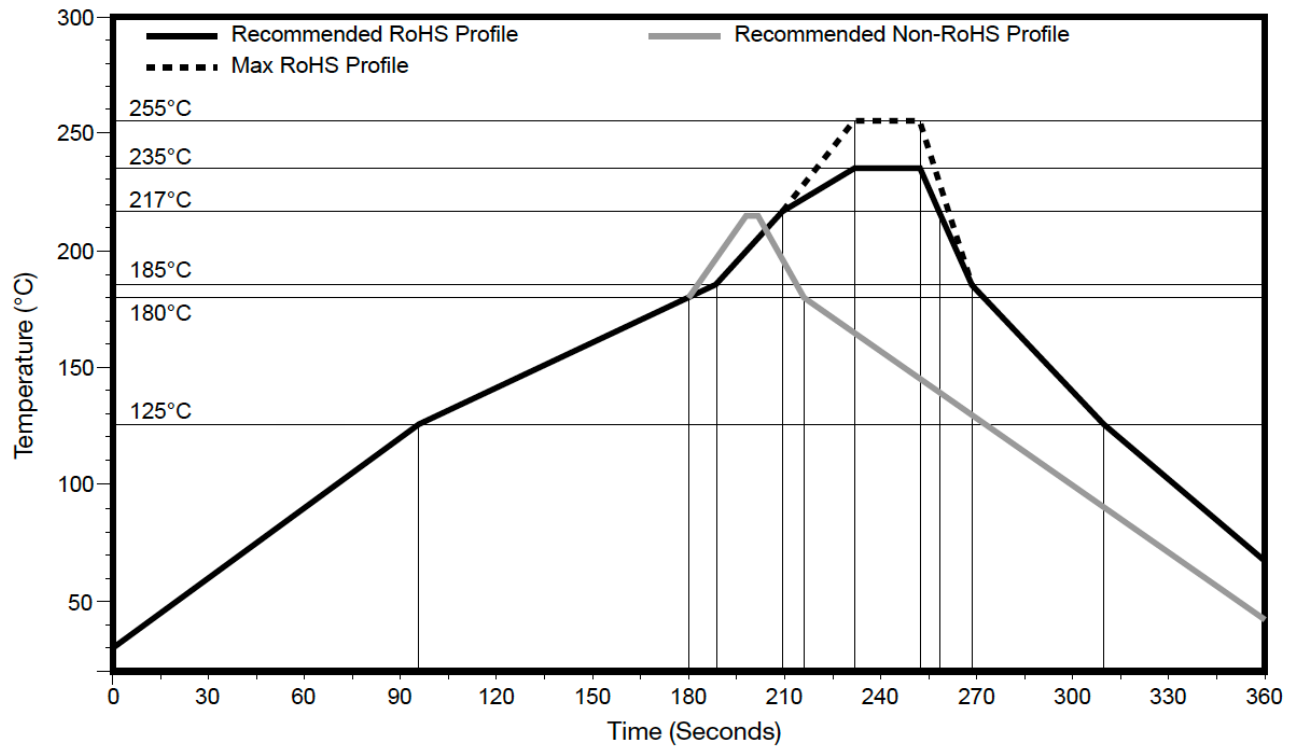


Figure 11. Solder Profile for the ANT-915-VHETH Antenna

## PACKAGING INFORMATION

The ANT-915-VHETH antenna is packaged in a protective plastic tray in quantities of 90 pcs. Distribution channels may offer alternative packaging options.

---

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

### te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

09/22 Original

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antenna Development Tools](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[PCSD.06.A](#) [1002427-02](#) [1004796-01](#) [YC0010AAEVB](#) [1001013-02](#) [1005454-01](#) [1004795-01](#) [1002436-01](#) [ACR1004A-EVB](#) [RAC00024-EVB](#) [RAC00245-EVB](#) [ACR1004GC-EVB](#) [W3012-K](#) [W3006-K](#) [SPD.25A](#) [74889100TB](#) [A10192-U1](#) [DTAD.01.A.50](#) [SR4C033-EVB-1](#) [AEK-LTE-CER](#) [IOT-K](#) [SR4W035-EVB-1](#) [W3010-K](#) [LORA-K](#) [ISM-K](#) [REFLECTOR-EVB-1](#) [ACAG0201-2450-EVB](#) [ACAG0301-15752450-EVB](#) [ACAG0301-1575-EVB](#) [ACAG0301-24505500-EVB](#) [ACAG0301-5500-EVB](#) [ACAG0801-2450-EVB](#) [ACAG1204-433-EVB](#) [ACAG1204-868-EVB](#) [ACAG1204-915-EVB](#) [ACAR0301-SW2-EVB](#) [ACAR3005-C2WB-EVB](#) [ACAR3005-S824-EVB](#) [ACAR3705-S698-EVB](#) [ACAR4008-S698-EVB](#) [ACR0301U-EVB](#) [ACR1504I3-EVB-A](#) [ACR1504I3-EVB-S](#) [ACR2005I4-EVB](#) [ACR4006X-EVB](#) [PRO-EB-450](#) [PRO-EB-453](#) [PRO-EB-472](#) [PRO-EB-476](#) [PRO-EB-550](#)