

# 具有 1.5% 精确负载电流监测和可调节瞬态故障管理功能的 TPS25982 2.7V 至 24V、15A、2.7mΩ 智能电子保险丝

## 1 特性

- 宽输入电压范围：2.7V 至 24V
  - 绝对最大值为 30V
- 低导通电阻：R<sub>ON</sub> = 2.7mΩ（典型值）
- 可调节电流限制阈值
  - 范围：2A 至 15A
  - 精度：± 8%（I<sub>LIM</sub> > 5A 时的典型值）
- 断路器和限流器选项
- 可调节过流消隐计时器
  - 处理负载瞬态而不跳变
- 精确的电流监视器输出
  - ± 1.5%（25°C 且 I<sub>OUT</sub> > 3A 时的典型值）
- 用户可配置的故障响应
  - 闭锁或自动重试
  - 重试次数（有限或无限）
  - 重试之间的延迟
- 强大的短路保护
  - 快速跳变响应时间 < 400ns（典型值）
  - 完成 100 万次电源短路事件测试
  - 不受线路瞬变影响 - 无干扰性跳变
- 可调节的输出压摆率控制 (dVdt) 控制
- 可调节的欠压锁定
- 过压锁定（固定 3.7V、7.6V 和 16.9V 且无 OVLO 选项）
- 集成式过热保护
- 电源正常状态指示
- 可调节的负载检测和握手计时器
- UL 2367 认证
  - 文件编号 E339631
  - R<sub>ILIM</sub> ≥ 182Ω
- 经 IEC 62368 CB 认证
- 小尺寸：4mm × 4mm QFN 封装

## 2 应用

- 热插拔
- 服务器待机电源轨、PCIe 转接卡、附加卡和风扇模块保护
- 路由器和开关光学模块保护
- 工业 PC
- 数字电视

## 3 说明

TPS25982 系列电子保险丝是采用小型封装的高度集成电路保护和电源管理解决方案。这些器件可在宽输入电压范围内工作。单个器件适用于需要最小 I<sup>2</sup>R 压降的低电压系统以及需要低功率耗散的高电压、高电流系统。它们能够非常有效地抵御过载、短路、电压浪涌和过多浪涌电流。

过压事件受内部截止电路的限制，可通过多个器件选项来选择过压阈值。

存在多种器件选项，可在过流情况响应、断路器或有源限流器之间进行选择。可以使用单个外部电阻器来设置过流限值和快速跳变（短路）阈值。这些器件通过区分瞬态事件和实际故障来智能地管理过流响应，从而允许系统在线路和负载瞬变期间不间断运行，而不会影响故障保护的稳健性。可将该器件配置为在故障关闭后保持闭锁或自动重试。可使用电容器来配置自动重试次数和重试延迟。这使远程系统能够自动从临时故障中恢复，同时确保电源不会因持续的故障而无限期地承受应力。


TPS25982 器件采用 4mm × 4mm 小型 QFN 封装。这些器件的额定工作结温范围为 -40°C 至 125°C。

### 器件信息(1)

| 器件型号     | 封装       | 封装尺寸（标称值）     |
|----------|----------|---------------|
| TPS25982 | QFN (24) | 4.0mm × 4.0mm |

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

### 简化电路原理图

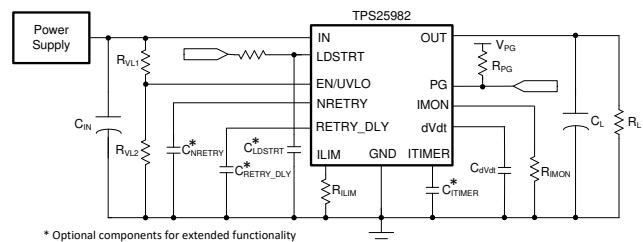

## 目录

|          |  |           |           |   |           |
|----------|--|-----------|-----------|---|-----------|
| 1        | 特性 .....                                     | 1         | 8.5       | Device Functional Modes .....   | 29        |
| 2        | 应用 .....                                     | 1         | <b>9</b>  | <b>Application and Implementation .....</b>                                       | <b>31</b> |
| 3        | 说明 .....                                     | 1         | 9.1       | Application Information .....   | 31        |
| 4        | 修订历史记录 .....                                 | 2         | 9.2       | Typical Application: Standby Power Rail Protection in<br>Datacenter Servers ..... | 31        |
| 5        | 器件比较表 .....                                  | 3         | 9.3       | System Examples .....   | 38        |
| <b>6</b> | <b>Pin Configuration and Functions .....</b> | <b>4</b>  | <b>10</b> | <b>Power Supply Recommendations .....</b>   | <b>42</b> |
| <b>7</b> | <b>Specifications .....</b>                  | <b>5</b>  | 10.1      | Transient Protection .....  | 42        |
| 7.1      | Absolute Maximum Ratings .....               | 5         | 10.2      | Output Short-Circuit Measurements .....   | 43        |
| 7.2      | ESD Ratings .....                            | 5         | <b>11</b> | <b>Layout .....</b>   | <b>44</b> |
| 7.3      | Recommended Operating Conditions .....       | 6         | 11.1      | Layout Guidelines .....   | 44        |
| 7.4      | Thermal Information .....                    | 6         | 11.2      | Layout Example .....  | 45        |
| 7.5      | Electrical Characteristics .....             | 7         | <b>12</b> | <b>器件和文档支持 .....</b>  | <b>46</b> |
| 7.6      | Timing Requirements .....                    | 8         | 12.1      | 文档支持 .....  | 46        |
| 7.7      | Switching Characteristics .....              | 9         | 12.2      | 接收文档更新通知 .....  | 46        |
| 7.8      | Typical Characteristics .....                | 10        | 12.3      | 社区资源 .....  | 46        |
| <b>8</b> | <b>Detailed Description .....</b>            | <b>17</b> | 12.4      | 商标 .....  | 46        |
| 8.1      | Overview .....                               | 17        | 12.5      | 静电放电警告 .....  | 46        |
| 8.2      | Functional Block Diagram .....               | 17        | 12.6      | Glossary .....  | 46        |
| 8.3      | Feature Description .....                    | 18        | <b>13</b> | <b>机械、封装和可订购信息 .....</b>  | <b>46</b> |
| 8.4      | Fault Response .....                         | 27        |           |   |           |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。


| Changes from Revision A (June 2019) to Revision B  | Page |
|--|------|
| • Change Overtemperature Protection $I_{dVdt}$ min from 3.55 $\mu$ A to 2 $\mu$ A in the <i>Electrical Characteristics</i> table ..... | 5    |

| Changes from Original (October 2018) to Revision A | Page |
|--|------|
| • 已更改 将“高级信息”更改为“生产数据” .....                       | 1    |

## 5 器件比较表

| 器件型号           | 过压锁定阈值  | 过流响应  |
|----------------|---------|-------|
|                | 典型值 (V) |       |
| TPS259822LNRGE | 3.7     | 有源限流器 |
| TPS259823LNRGE | 7.6     | 有源限流器 |
| TPS259824LNRGE | 16.9    | 有源限流器 |
| TPS259827LNRGE | 无 OVLO  | 有源限流器 |
| TPS259822ONRGE | 3.7     | 断路器   |
| TPS259823ONRGE | 7.6     | 断路器   |
| TPS259824ONRGE | 16.9    | 断路器   |
| TPS259827ONRGE | 无 OVLO  | 断路器   |

## 6 Pin Configuration and Functions

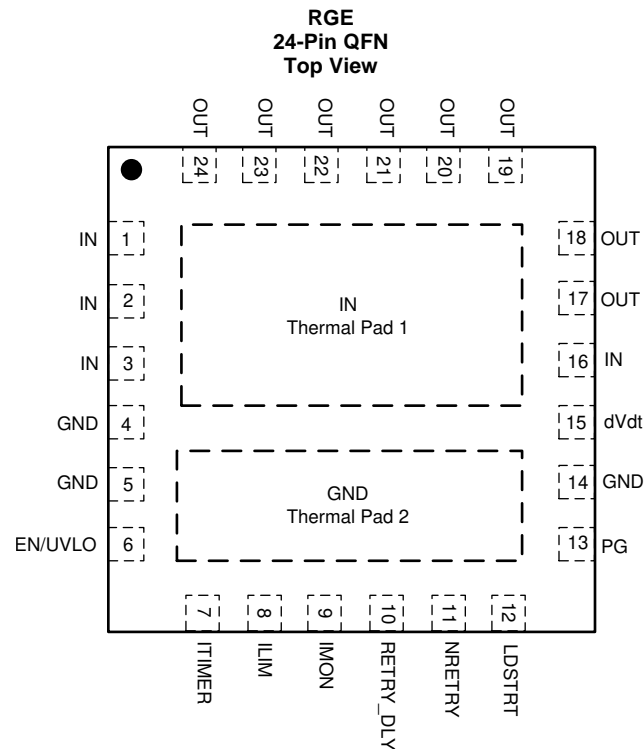

### Pin Functions

| PIN       |                                | TYPE            | DESCRIPTION  |
|-----------|--------------------------------|-----------------|--|
| NAME      | NO.                            |                 |  |
| OUT       | 17, 18, 19, 20, 21, 22, 23, 24 | Power           | Power Output   |
| IN        | 1, 2, 3, 16, Pad 1             | Thermal / Power | Power Input. The exposed pad must be soldered to input power plane uniformly to ensure proper heat dissipation and to maintain optimal current distribution through the device.  |
| GND       | 4, 5, 14, Pad 2                | Ground          | Connect to System Ground   |
| EN/UVLO   | 6                              | Analog Input    | Active High Enable for the device. A resistor divider on this pin from input supply to GND can be used to adjust the Undervoltage Lockout threshold. <b>Do not leave floating.</b>   |
| ITIMER    | 7                              | Analog Output   | A capacitor from this pin to GND sets the overcurrent blanking interval during which the output current can temporarily exceed set current limit (but lower than fast-trip threshold) before the device overcurrent response takes action. Leave this pin open for fastest response to overcurrent events. Refer to <a href="#">ITIMER Functional Mode Summary</a> for more details. |
| ILIM      | 8                              | Analog Output   | An external resistor from this pin to GND sets the output current limit threshold and fast trip threshold. <b>Do not leave floating.</b>   |
| IMON      | 9                              | Analog Output   | Analog output load current monitor. This pin sources a current proportional to the load current. This can be converted to a voltage signal by connecting an appropriate resistor from this pin to GND.   |
| RETRY_DLY | 10                             | Analog Output   | A capacitor from this pin to GND sets the time period that has to elapse after a fault shutdown before the device attempts to restart automatically. Connect this pin to GND for latch-off operation (no auto-retries) after a fault. Refer to <a href="#">Fault Response</a> section for more details.  |
| NRETRY    | 11                             | Analog Output   | A capacitor from this pin to GND sets the number of times the part attempts to restart automatically after shutdown due to fault. Connect this pin to GND if the part should retry indefinitely. Refer to <a href="#">Fault Response</a> section for more details.   |

### Pin Functions (continued)

| PIN    |     | TYPE           | DESCRIPTION  |
|--------|-----|----------------|--|
| NAME   | NO. |                |  |
| LDSTRT | 12  | Analog Input   | Load Detect/Handshake Signal. A capacitor from this pin to GND sets the time period after PG assertion within which the pin has to be pulled low for the device to remain ON. Connect to GND if the load detect/handshake feature is not used. Refer to <a href="#">Load Detect/Handshake (LDSTRT)</a> section for more details. <b>Do not leave floating.</b> |
| PG     | 13  | Digital Output | Active High Power Good Indication. This pin is asserted when the FET is fully enhanced and output has reached maximum voltage. It is an open drain output that requires an external pull-up resistor to an external supply. This pin remains logic low when $V_{IN} < V_{UVLP}$ .  |
| dVdt   | 15  | Analog Output  | A capacitor from this pin to GND sets the output turn on slew rate. Leave this pin floating for the fastest slew rate during start up.   |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

| Parameter        |                                     | Pin       | MIN                | MAX                        | UNIT |
|------------------|-------------------------------------|-----------|--------------------|----------------------------|------|
| $V_{IN}$         | Maximum Input Voltage Range         | IN        | -0.3               | 30                         | V    |
| $V_{OUT}$        | Maximum Output Voltage Range        | OUT       | -0.8               | min (30V, $V_{IN} + 0.3$ ) | V    |
| $V_{EN/UVLO}$    | Maximum Enable Pin Voltage Range    | EN/UVLO   | -0.3               | 7                          | V    |
| $V_{LDSTRT}$     | Maximum LDSTRT Pin Voltage Range    | LDSTRT    |                    | 7                          | V    |
| $V_{dVdt}$       | Maximum dVdt Pin Voltage Range      | dVdt      | Internally Limited |                            | V    |
| $V_{PG}$         | Maximum PG Pin Voltage Range        | PG        | -0.3               | 7                          | V    |
| $V_{ITIMER}$     | Maximum ITIMER Pin Voltage Range    | ITIMER    | Internally Limited |                            | V    |
| $V_{NRETRY}$     | Maximum NRETRY Pin Voltage Range    | NRETRY    | Internally Limited |                            | V    |
| $V_{RETRY\_DLY}$ | Maximum RETRY_DLY Pin Voltage Range | RETRY_DLY | Internally Limited |                            | V    |
| $I_{MAX}$        | Maximum Continuous Switch Current   | IN to OUT | Internally Limited |                            | A    |
| $T_J$            | Junction temperature                |           | Internally Limited |                            | °C   |
| $T_{LEAD}$       | Maximum Soldering Temperature       |           |                    | 300                        | °C   |
| $T_{stg}$        | Storage temperature                 |           | -65                | 150                        | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|             |                         |  | VALUE  | UNIT |
|-------------|-------------------------|--|--------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ± 2000 | V    |
|             |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | ± 1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| Parameter              |  | Pin       | MIN                   | MAX  | UNIT |
|------------------------|--|-----------|-----------------------|------|------|
| V <sub>IN</sub>        | Input Voltage Range                    | IN        | 2.7                   | 24   | V    |
| V <sub>OUT</sub>       | Output Voltage Range                   | OUT       | V <sub>IN</sub> + 0.3 |      | V    |
| V <sub>EN/UVLO</sub>   | Enable Pin Voltage Range               | EN/UVLO   | 6 <sup>(1)</sup>      |      | V    |
| V <sub>LDSTRT</sub>    | LDSTRT Pin Capacitor Voltage Rating    | LDSTRT    | 4                     |      | V    |
| V <sub>dVdT</sub>      | dVdT Pin Capacitor Voltage Rating      | dVdT      | V <sub>IN</sub> + 4   |      | V    |
| V <sub>PG</sub>        | PG Pin Voltage Range                   | PG        | 6 <sup>(2)</sup>      |      | V    |
| V <sub>ITIMER</sub>    | ITIMER Pin Capacitor Voltage Rating    | ITIMER    | 4                     |      | V    |
| V <sub>NRETRY</sub>    | NRETRY Pin Capacitor Voltage Rating    | NRETRY    | 4                     |      | V    |
| V <sub>RETRY_DLY</sub> | RETRY_DLY Pin Capacitor Voltage Rating | RETRY_DLY | 4                     |      | V    |
| R <sub>ILIM</sub>      | ILIM Pin Resistor                      | ILIM      | 82                    | 1650 | Ω    |
| I <sub>MAX</sub>       | Continuous Switch Current              | IN to OUT | 15                    |      | A    |
| T <sub>J</sub>         | Junction temperature                   |           | -40                   | 125  | °C   |

- (1) For supply voltages below 6V, it is okay to pull up the EN pin to IN directly. For supply voltages greater than 6V, it is recommended to use an appropriate resistor divider between IN, EN and GND to ensure the voltage at the EN pin is within the specified limits.
- (2) For supply voltages below 6V, it is okay to pull up the PG pin to IN/OUT through a resistor. For supply voltages greater than 6V, it is recommended to use a stepped down power supply to ensure the voltage at the PG pin is within the specified limits.

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> (2) |  | TPS25982X | UNIT |
|-----------------------------------|--|-----------|------|
|                                   |  | RGE (QFN) |      |
|                                   |  | 24 PINS   |      |
| R <sub>θJA</sub>                  | Junction-to-ambient thermal resistance       | 34.6      | °C/W |
| R <sub>θJC(top)</sub>             | Junction-to-case (top) thermal resistance    | 36.7      | °C/W |
| R <sub>θJB</sub>                  | Junction-to-board thermal resistance         | 11.2      | °C/W |
| Ψ <sub>JT</sub>                   | Junction-to-top characterization parameter   | 3         | °C/W |
| Ψ <sub>JB</sub>                   | Junction-to-board characterization parameter | 11.2      | °C/W |
| R <sub>θJC(bot)</sub>             | Junction-to-case (bottom) thermal resistance | 1.6       | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.
- (2) Based on simulations conducted with the device mounted on a JEDEC 4-layer PCB (2s2p) with minimum recommended pad size (2 oz Cu) and 3x2 via array.

## 7.5 Electrical Characteristics

(Test conditions unless otherwise noted)  $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ ,  $V_{IN} = 12\text{ V}$  for TPS259824x/7x,  $5\text{ V}$  for TPS259823x,  $3.3\text{ V}$  for TPS259822x,  $V_{EN/UVLO} = 2\text{ V}$ ,  $R_{ILIM} = 1650\ \Omega$ ,  $C_{dVdT} = \text{Open}$ ,  $\text{OUT} = \text{Open}$ . All voltages referenced to GND.

| PARAMETER                                      |   | TEST CONDITIONS  | MIN   | TYP   | MAX   | UNIT             |
|--|---|--|-------|-------|-------|------------------|
| <b>INPUT SUPPLY (IN)</b>                       |   |  |       |       |       |                  |
| $V_{IN}$                                       | Input Voltage Range   |  | 2.7   |       | 24    | V                |
| $I_Q$  | IN Quiescent Current  | $V_{EN} \geq V_{UVLO(R)}$  |       | 800   | 1200  | $\mu\text{A}$    |
| $I_{SD}$                                       | IN Shutdown Current   | $V_{SD} < V_{EN} < V_{UVLO}$   |       | 204   | 300   | $\mu\text{A}$    |
|  |   | $V_{EN} < V_{SD}$  |       | 3.67  | 20    | $\mu\text{A}$    |
| $V_{UVP}$                                      | IN Undervoltage Protection Threshold  | $V_{IN}$ Rising  | 2.46  | 2.53  | 2.6   | V                |
|  |   | $V_{IN}$ Falling   | 2.35  | 2.42  | 2.49  | V                |
| <b>OVERVOLTAGE PROTECTION (IN)</b>             |   |  |       |       |       |                  |
| $V_{OVP(R)}$                                   | Overvoltage Protection Threshold  | TPS259822x, $V_{IN}$ Rising  | 3.62  | 3.7   | 3.76  | V                |
|  |   | TPS259823x, $V_{IN}$ Rising  | 7.39  | 7.6   | 7.76  | V                |
|  |   | TPS259824x, $V_{IN}$ Rising  | 16.32 | 16.9  | 17.31 | V                |
| $V_{OVP(F)}$                                   |   | TPS259822x, $V_{IN}$ Falling   | 3.52  | 3.6   | 3.66  | V                |
|  |   | TPS259823x, $V_{IN}$ Falling   | 7.22  | 7.4   | 7.55  | V                |
|  |   | TPS259824x, $V_{IN}$ Falling   | 15.80 | 16.4  | 16.81 | V                |
| <b>OUTPUT CURRENT MONITOR (IMON)</b>           |   |  |       |       |       |                  |
| $G_{IMON}$                                     | Current Monitor Gain ( $I_{IMON}:I_{OUT}$ )   | $3\text{ A} \leq I_{OUT} \leq \min(15\text{ A}, I_{LIM})$ , $-40^{\circ}\text{C} \leq T_A \leq 75^{\circ}\text{C}$ | 238.6 | 246   | 253.4 | $\mu\text{A/A}$  |
| <b>OUTPUT CURRENT LIMIT (ILIM)</b>             |   |  |       |       |       |                  |
| $I_{LIM}$                                      | $I_{OUT}$ Current Limit Threshold   | $R_{ILIM} = 773\ \Omega$ , $T_J = 25^{\circ}\text{C}$  | 1.76  | 2     | 2.17  | A                |
|  |   | $R_{ILIM} = 773\ \Omega$ , $T_J = -40$ to $125^{\circ}\text{C}$  | 1.53  | 2     | 2.43  | A                |
|  |   | $R_{ILIM} = 300\ \Omega$ , $T_J = 25^{\circ}\text{C}$  | 4.75  | 4.98  | 5.23  | A                |
|  |   | $R_{ILIM} = 300\ \Omega$ , $T_J = -40$ to $125^{\circ}\text{C}$  | 4.36  | 4.98  | 5.66  | A                |
|  |   | $R_{ILIM} = 182\ \Omega$ , $T_J = 25^{\circ}\text{C}$  | 7.77  | 8.13  | 8.54  | A                |
|  |   | $R_{ILIM} = 182\ \Omega$ , $T_J = -40$ to $125^{\circ}\text{C}$  | 7.23  | 8.13  | 9.07  | A                |
|  |   | $R_{ILIM} = 100\ \Omega$ , $T_J = 25^{\circ}\text{C}$  | 13.56 | 14.71 | 15.66 | A                |
|  |   | $R_{ILIM} = 100\ \Omega$ , $T_J = -40$ to $125^{\circ}\text{C}$  | 12.85 | 14.71 | 15.99 | A                |
|  | $R_{ILIM} = \text{Open}$  |  | 0     |       | A     |                  |
| $I_{CB}$                                       | $I_{OUT}$ Circuit Breaker Threshold During ILIM pin Short to GND Condition (Single point failure) | $R_{ILIM} = \text{Short to GND}$ , $T_J = 25^{\circ}\text{C}$  |       |       | 20    | A                |
| $I_{SC}$                                       | Short-circuit Fast Trip Threshold   |  |       | 210   |       | $\% I_{LIM}$     |
| <b>ON-RESISTANCE (IN - OUT)</b>                |   |  |       |       |       |                  |
| $R_{ON}$                                       | ON State Resistance   | $T_J = 25^{\circ}\text{C}$ , $I_{OUT} = 2\text{ A}$  |       | 2.7   | 3.2   | $\text{m}\Omega$ |
|  |   | $T_J = -40$ to $125^{\circ}\text{C}$ , $I_{OUT} = 2\text{ A}$  |       |       | 4.5   | $\text{m}\Omega$ |
| <b>ENABLE / UNDERVOLTAGE LOCKOUT (EN/UVLO)</b> |   |  |       |       |       |                  |
| $V_{UVLO(R)}$                                  | EN/UVLO Pin Voltage Threshold   | $V_{EN}$ Rising  | 1.18  | 1.2   | 1.23  | V                |
| $V_{UVLO(F)}$                                  |   | $V_{EN}$ Falling   | 1.08  | 1.1   | 1.13  | V                |
| $V_{SD}$                                       | EN/UVLO Pin Voltage Threshold for Lowest Shutdown Current   | $V_{EN}$ Falling   | 0.59  | 0.8   |       | V                |
| $I_{ENLKG}$                                    | EN/UVLO Pin Leakage Current   |  |       |       | 0.1   | $\mu\text{A}$    |
| <b>POWER GOOD INDICATION (PG)</b>              |   |  |       |       |       |                  |
| $V_{PGD}$                                      | PG Pin Low Voltage (PG de-asserted)   | $V_{IN} < V_{UVP}$ , $V_{EN} < V_{SD}$ , $I_{PG} = 26\ \mu\text{A}$  |       | 651   | 786   | $\text{mV}$      |
|  |   | $V_{IN} = 3.3\text{V}$ , $I_{PG} \leq 5\text{ mA}$   |       | 320   |       | $\text{mV}$      |
|  |   | $V_{IN} \geq 5\text{V}$ , $I_{PG} \leq 5\text{ mA}$  |       | 100   |       | $\text{mV}$      |
| $I_{PGLKG}$                                    | PG Pin Leakage Current (PG asserted)  | PG pulled up to $5\text{ V}$ through $10\text{ k}\Omega$   |       |       | 1.7   | $\mu\text{A}$    |
| $R_{ON(PGA)}$                                  | $R_{ON}$ When PG is asserted  |  |       | 4.2   |       | $\text{m}\Omega$ |

## Electrical Characteristics (continued)

(Test conditions unless otherwise noted)  $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ ,  $V_{\text{IN}} = 12\text{ V}$  for TPS259824x/7x, 5 V for TPS259823x, 3.3 V for TPS259822x,  $V_{\text{ENUVLO}} = 2\text{ V}$ ,  $R_{\text{ILIM}} = 1650\ \Omega$ ,  $C_{\text{dVdT}} = \text{Open}$ ,  $\text{OUT} = \text{Open}$ . All voltages referenced to GND.

| PARAMETER                                    |   | TEST CONDITIONS  | MIN   | TYP   | MAX   | UNIT               |
|--|---|--|-------|-------|-------|--------------------|
| $V_{\text{PGTHD}}$                           | $V_{\text{IN}} - V_{\text{OUT}}$ Threshold when PG is de-asserted |  | 0.224 | 0.326 | 0.450 | V                  |
| <b>AUTO-RETRY DELAY INTERVAL (RETRY_DLY)</b> |   |  |       |       |       |                    |
| $V_{\text{RETRY\_DLY(R)}}$                   | RETRY_DLY Oscillator Comparator Threshold                         |  |       | 1.1   |       | V                  |
| $V_{\text{RETRY\_DLY(F)}}$                   |   |  |       | 0.35  |       | V                  |
| $V_{\text{RETRY\_DLY\_HYS}}$                 | RETRY_DLY Oscillator Hysteresis                                   |  | 0.65  | 0.75  | 0.85  | V                  |
| $I_{\text{RETRY\_DLY}}$                      | RETRY_DLY Pin Bias Current  |  | 1.7   | 2.05  | 2.5   | $\mu\text{A}$      |
| <b>NUMBER OF AUTO-RETRIES (NRETRY)</b>       |   |  |       |       |       |                    |
| $V_{\text{NRETRY(R)}}$                       | NRETRY Oscillator Comparator Threshold                            |  |       | 1.1   |       | V                  |
| $V_{\text{NRETRY(F)}}$                       |   |  |       | 0.35  |       | V                  |
| $V_{\text{NRETRY\_HYS}}$                     | NRETRY Oscillator Hysteresis                                      |  | 0.65  | 0.75  | 0.85  | V                  |
| $I_{\text{NRETRY}}$                          | NRETRY Pin Bias Current   |  | 1.7   | 2.05  | 2.5   | $\mu\text{A}$      |
| <b>CURRENT FAULT TIMER (ITIMER)</b>          |   |  |       |       |       |                    |
| $I_{\text{ITIMER}}$                          | ITIMER Discharge Current  | $I_{\text{SC}} > I_{\text{OUT}} > I_{\text{LIM}}$                          | 1.4   | 2.1   | 2.8   | $\mu\text{A}$      |
| $R_{\text{ITIMER}}$                          | ITIMER Internal Pull-up Resistance                                | $I_{\text{OUT}} < I_{\text{LIM}}$  |       | 23    |       | k $\Omega$         |
| $V_{\text{INT}}$                             | ITIMER Pin Default Voltage  | $I_{\text{OUT}} < I_{\text{LIM}}$  |       | 2.5   |       | V                  |
| $V_{\text{ITIMER}}$                          | ITIMER Comparator Falling Threshold                               | $I_{\text{SC}} > I_{\text{OUT}} > I_{\text{LIM}}$ , ITIMER Voltage Rising  |       | 1.53  |       | V                  |
| $\Delta V_{\text{ITIMER}}$                   | ITIMER Comparator Voltage Threshold Delta                         | $I_{\text{SC}} > I_{\text{OUT}} > I_{\text{LIM}}$ , ITIMER Voltage Falling | 0.7   | 0.98  | 1.3   | V                  |
| <b>LDSTRT</b>                                |   |  |       |       |       |                    |
| $V_{\text{LDSTRT}}$                          | LDSTRT Rising Threshold   | LDSTRT voltage rising  | 1.1   | 1.21  | 1.3   | V                  |
| $I_{\text{LDSTRT}}$                          | LDSTRT Charging Current   | PG asserted  | 1.7   | 2.05  | 2.4   | $\mu\text{A}$      |
| $R_{\text{LDSTRT}}$                          | LDSTRT Internal Pull-down Resistance                              |  |       | 31    |       | $\Omega$           |
| <b>OVERTEMPERATURE PROTECTION</b>            |   |  |       |       |       |                    |
| TSD  | Thermal Shutdown Threshold  | $T_J$ Rising   |       | 150   |       | $^{\circ}\text{C}$ |
| TSDHys                                       | Thermal Shutdown Hysteresis                                       | $T_J$ Falling  |       | 10    |       | $^{\circ}\text{C}$ |
| <b>dVdt</b>                                  |   |  |       |       |       |                    |
| $I_{\text{dVdt}}$                            | dVdt Pin Charging Current   |  | 2     | 4.6   | 6.33  | $\mu\text{A}$      |

## 7.6 Timing Requirements

| PARAMETER        |   | TEST CONDITIONS   | MIN | TYP | MAX | UNIT          |
|------------------|---|---|-----|-----|-----|---------------|
| $t_{\text{OVP}}$ | Overvoltage Protection Response Time <sup>(1)</sup> | $V_{\text{IN}} > V_{\text{OVLO(R)}}$ to $V_{\text{OUT}\downarrow}$ , TPS259822x   |     | 1.5 |     | $\mu\text{s}$ |
|                  |   | $V_{\text{IN}} > V_{\text{OVLO(R)}}$ to $V_{\text{OUT}\downarrow}$ , TPS259823x   |     | 5   |     | $\mu\text{s}$ |
|                  |   | $V_{\text{IN}} > V_{\text{OVLO(R)}}$ to $V_{\text{OUT}\downarrow}$ , TPS259824x   |     | 5   |     | $\mu\text{s}$ |
| $t_{\text{LIM}}$ | Current Limit Response Time <sup>(2)</sup>          | $I_{\text{OUT}} > I_{\text{LIM}} + 30\%$ and ITIMER expired to $I_{\text{OUT}} \leq I_{\text{LIM}}$   |     | 270 |     | $\mu\text{s}$ |
| $t_{\text{SC}}$  | Short Circuit Response Time                         | $I_{\text{OUT}} > 3 \times I_{\text{LIM}}$ to $V_{\text{OUT}}$ turned OFF   |     | 400 |     | ns            |
| $t_{\text{PGD}}$ | PG Assertion/De-assertion De-glitch <sup>(3)</sup>  | $V_{\text{G}} > (V_{\text{IN}} + 3.6\text{V})$ to $\text{PG}\uparrow$ or $(V_{\text{IN}} - V_{\text{OUT}}) > V_{\text{PGTHD}}$ to $\text{PG}\downarrow$ |     | 120 |     | $\mu\text{s}$ |

(1) Please refer to Fig. 43

(2) Please refer to Fig. 45

(3) Please refer to Fig. 47



### 7.7 Switching Characteristics

The output rising slew rate is internally controlled and constant across the entire operating voltage range to ensure the turn on timing is not affected by the load conditions. The rising slew rate can be adjusted by adding capacitance from the dVdt pin to ground. As  $C_{dVdt}$  is increased it will slow the rising slew rate (SR). See Slew Rate and Inrush Current Control (dVdt) section for more details. The Turn-Off Delay and Fall Time, however, are dependent on the RC time constant of the load capacitance ( $C_{OUT}$ ) and Load Resistance ( $R_L$ ). The Switching Characteristics are only valid for the power-up sequence where the supply is available in steady state condition and the load voltage is completely discharged before the device is enabled. Typical Values are taken at  $T_J = 25^\circ\text{C}$  unless specifically noted otherwise.  $R_L = 3.6 \Omega$ ,  $C_{OUT} = 1 \text{ mF}$

| PARAMETER   |                         | $V_{IN}$ | $C_{dVdt} = \text{Open}$ | $C_{dVdt} = 3300\text{pF}$ | $C_{dVdt} = 6800\text{pF}$ | UNIT          |
|-------------|-------------------------|----------|--------------------------|----------------------------|----------------------------|---------------|
| $SR_{ON}$   | Output Rising slew rate | 2.7 V    | 6.26                     | 1.39                       | 0.68                       | V/ms          |
|             |                         | 12 V     | 7.35                     | 1.4                        | 0.68                       |               |
|             |                         | 24 V     | 7.4                      | 1.4                        | 0.68                       |               |
| $t_{D,ON}$  | Turn on delay           | 2.7 V    | 1.3                      | 1.49                       | 1.7                        | ms            |
|             |                         | 12 V     | 1.24                     | 2.1                        | 3.01                       |               |
|             |                         | 24 V     | 1.2                      | 2.91                       | 4.74                       |               |
| $t_R$       | Rise time               | 2.7 V    | 0.67                     | 1.63                       | 3.35                       | ms            |
|             |                         | 12 V     | 1.35                     | 6.99                       | 14.41                      |               |
|             |                         | 24 V     | 2.66                     | 13.77                      | 28.41                      |               |
| $t_{ON}$    | Turn on time            | 2.7 V    | 1.97                     | 3.12                       | 5.05                       | ms            |
|             |                         | 12 V     | 2.59                     | 9.09                       | 17.42                      |               |
|             |                         | 24 V     | 3.86                     | 16.68                      | 33.15                      |               |
| $t_{D,OFF}$ | Turn off delay          | 2.7 V    | 151                      | 152                        | 152                        | $\mu\text{s}$ |
|             |                         | 12 V     | 212                      | 212                        | 212                        |               |
|             |                         | 24 V     | 262                      | 262                        | 262                        |               |

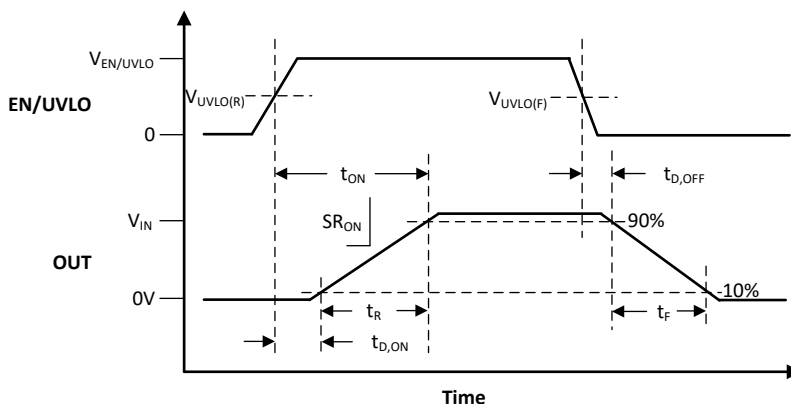


图 1. TPS25982 Switching Times

## 7.8 Typical Characteristics

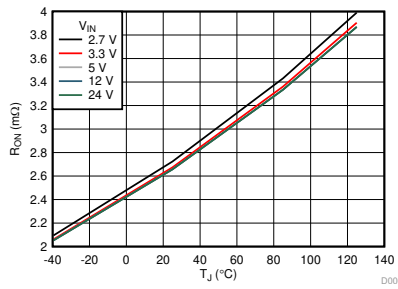


图 2. ON Resistance vs Temperature



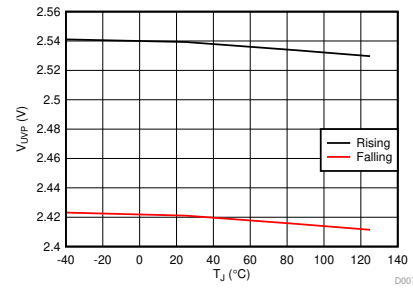


图 3. Supply UVP Threshold vs Temperature

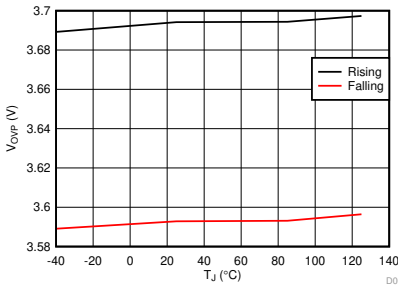


TPS259822x Variants

图 4. Supply OVP Threshold vs Temperature

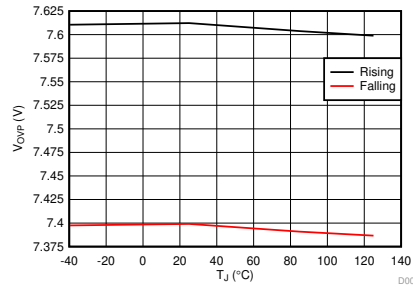

TPS259823x Variants

图 5. Supply OVP Threshold vs Temperature

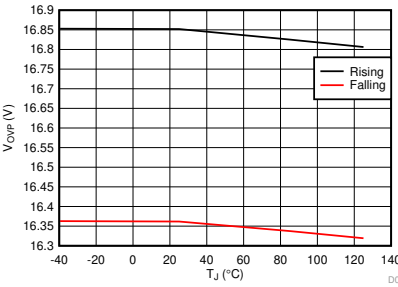

TPS259824x Variants

图 6. Supply OVP Threshold vs Temperature


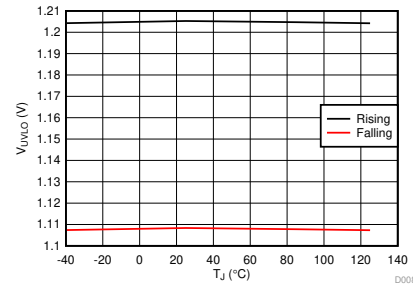


图 7. EN/UVLO Threshold vs Temperature

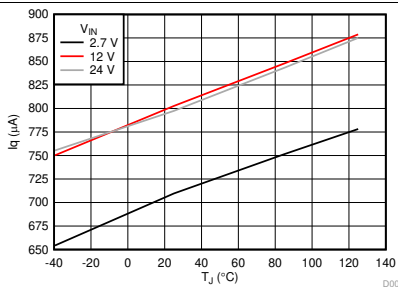

$V_{\text{ENUVLO}} = 2 \text{ V}$ , OUT = Open

图 8. Quiescent Current vs Temperature










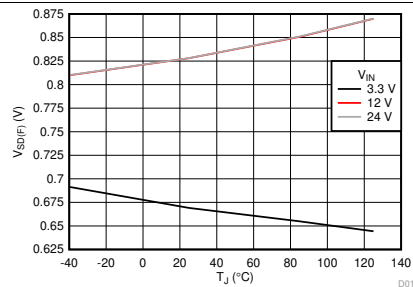


图 9. EN/UVLO Falling Threshold for Lowest Current Consumption

Typical Characteristics (接下页)

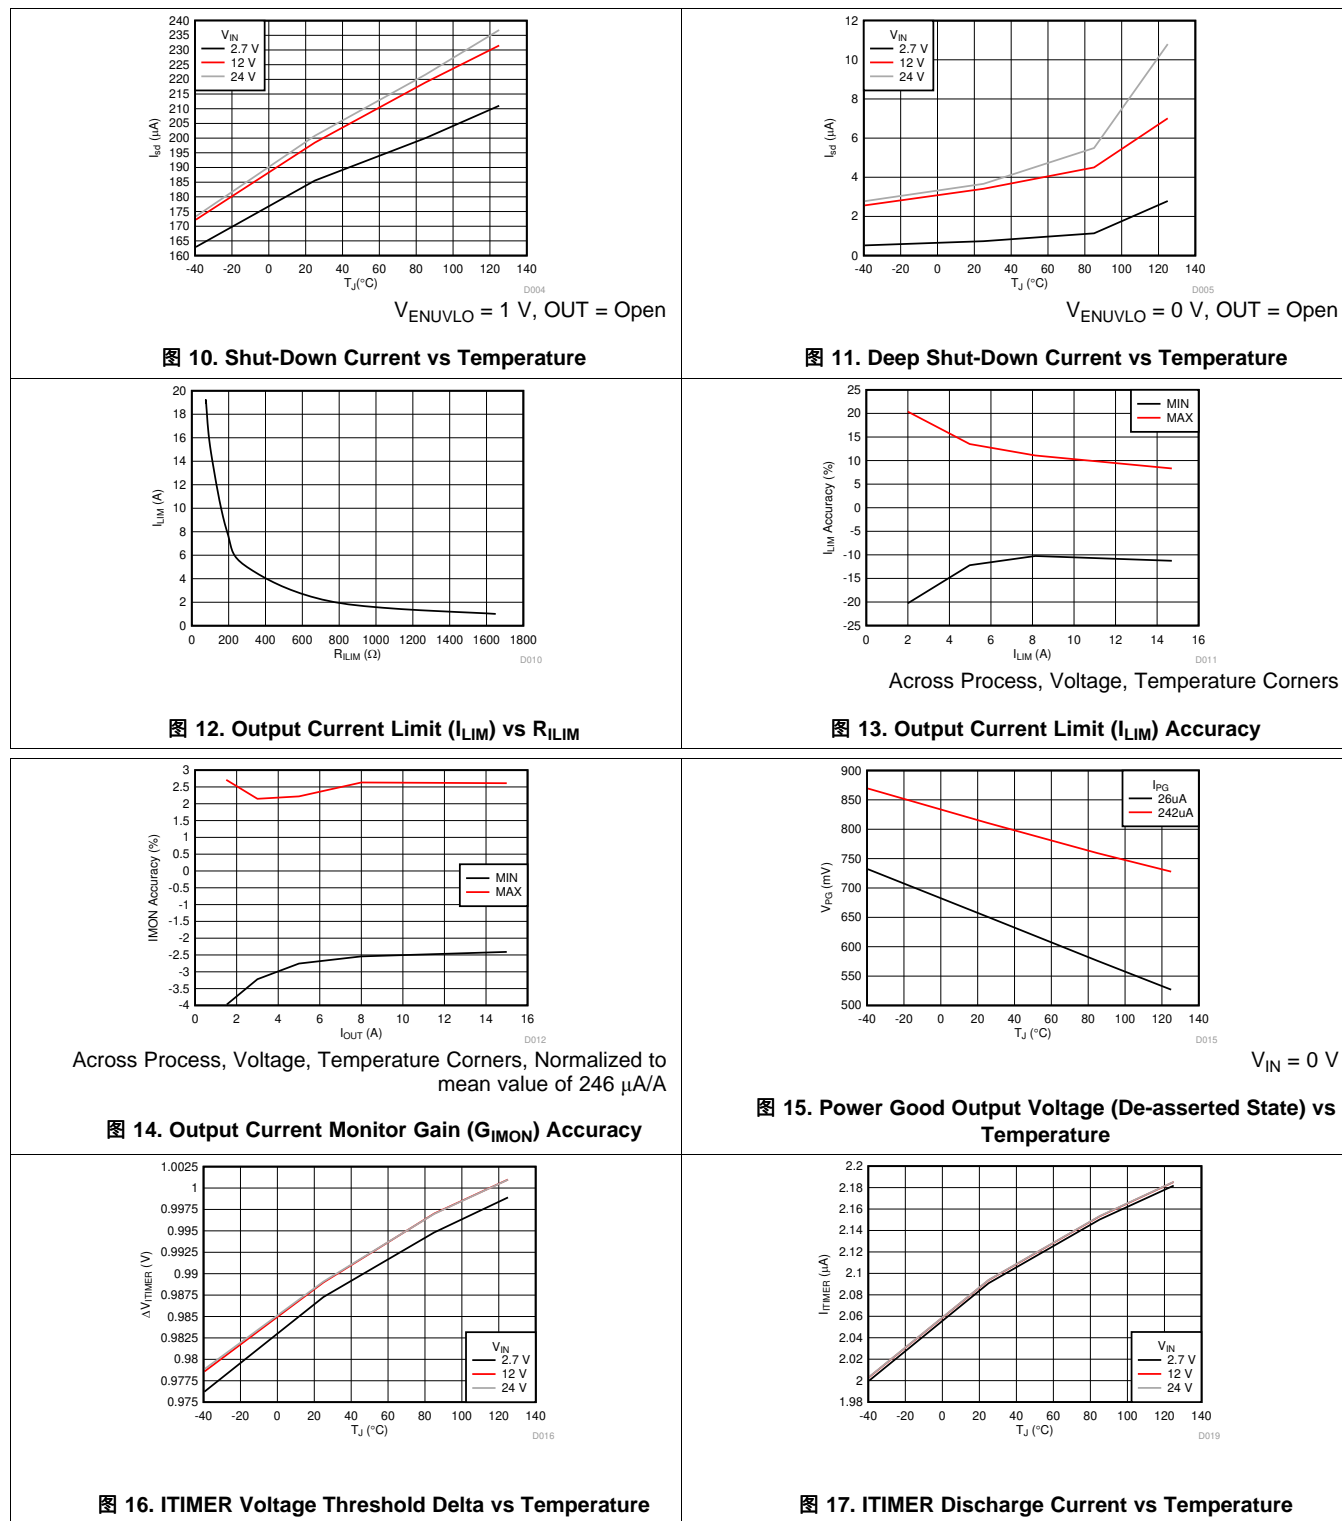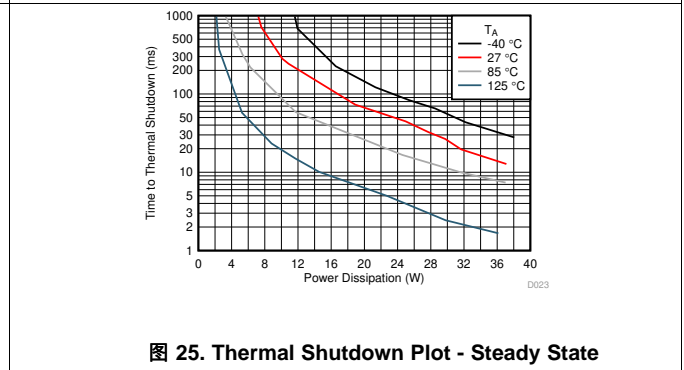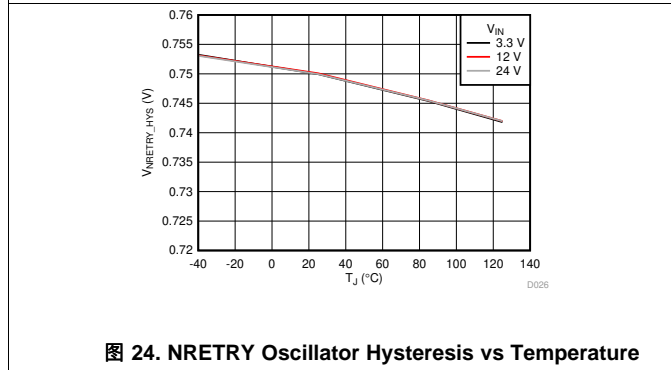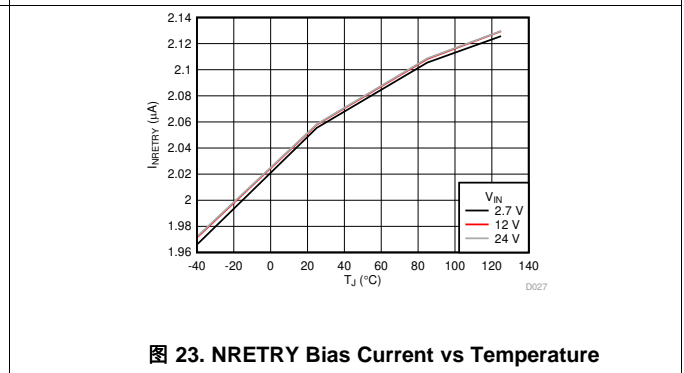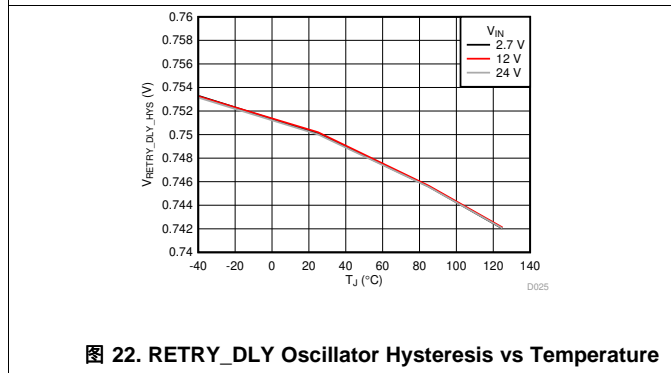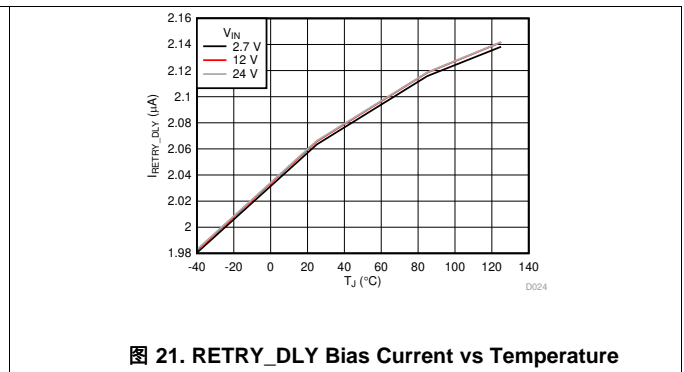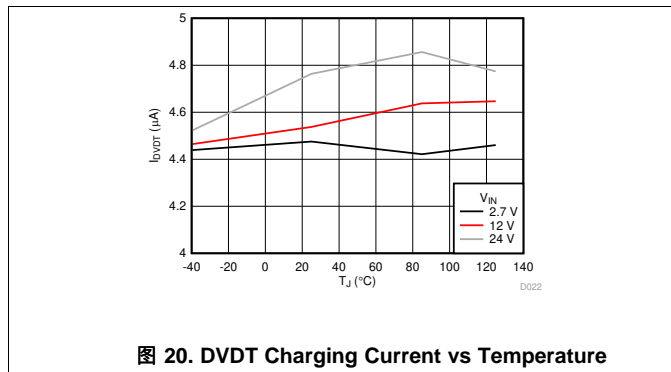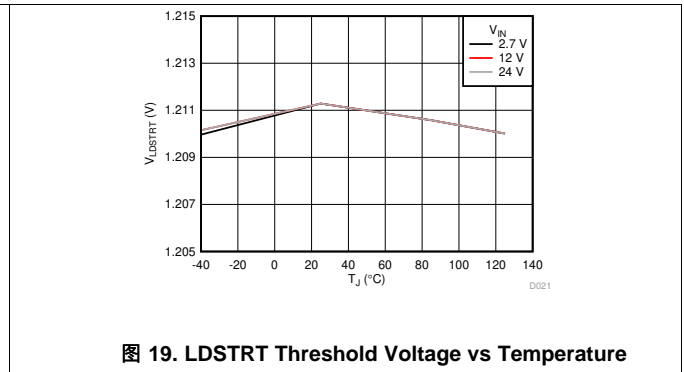

Typical Characteristics (接下页)

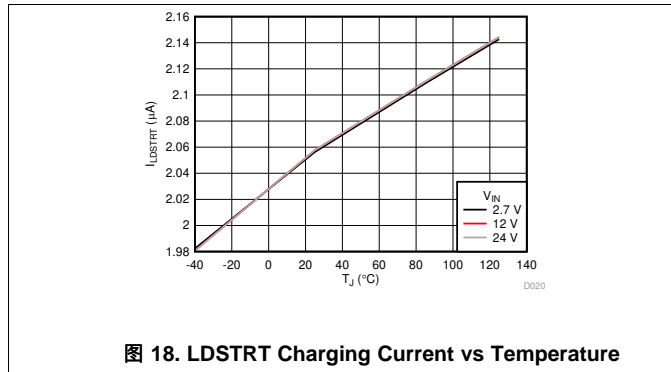

Typical Characteristics (接下页)

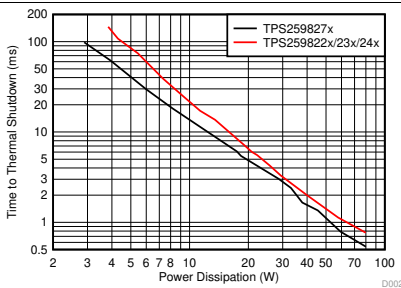


图 26. Thermal Shutdown Plot - Inrush/Overload

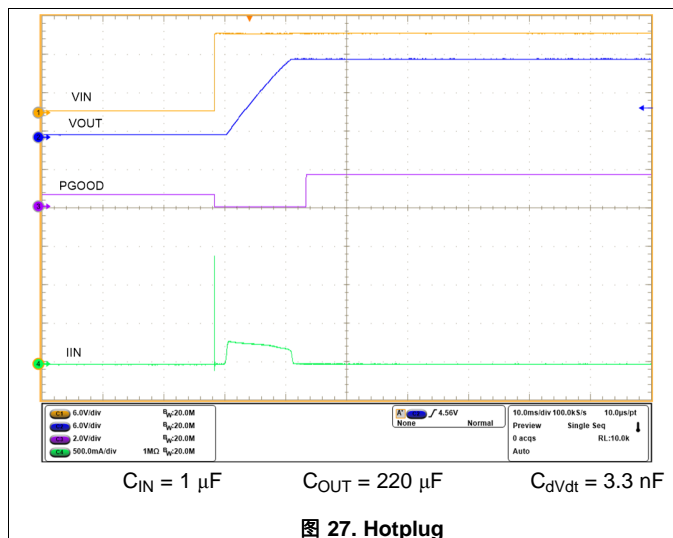


图 27. Hotplug

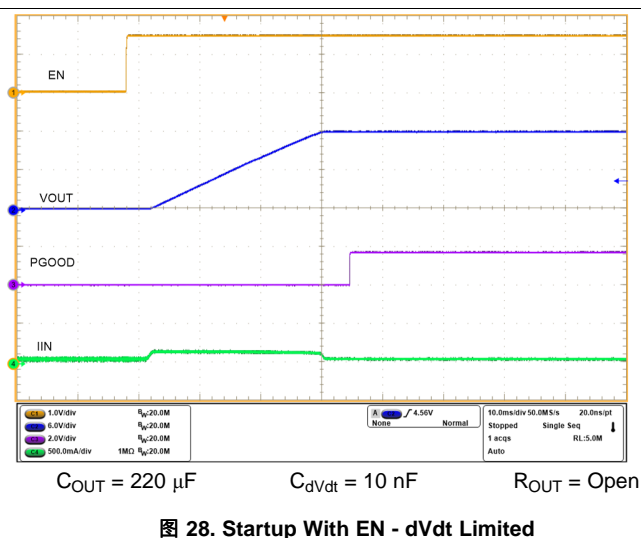


图 28. Startup With EN - dVdt Limited

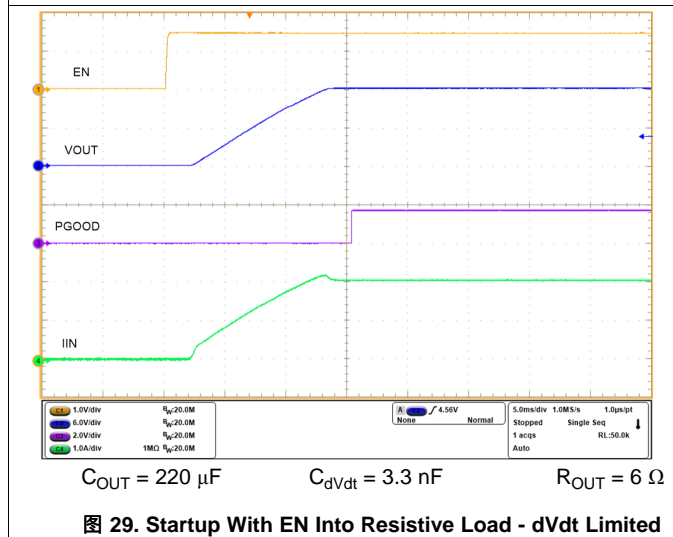


图 29. Startup With EN Into Resistive Load - dVdt Limited






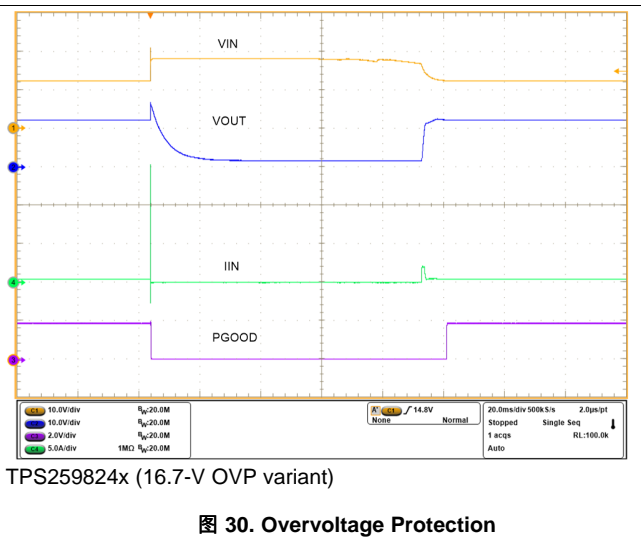


图 30. Overvoltage Protection

Typical Characteristics (接下页)

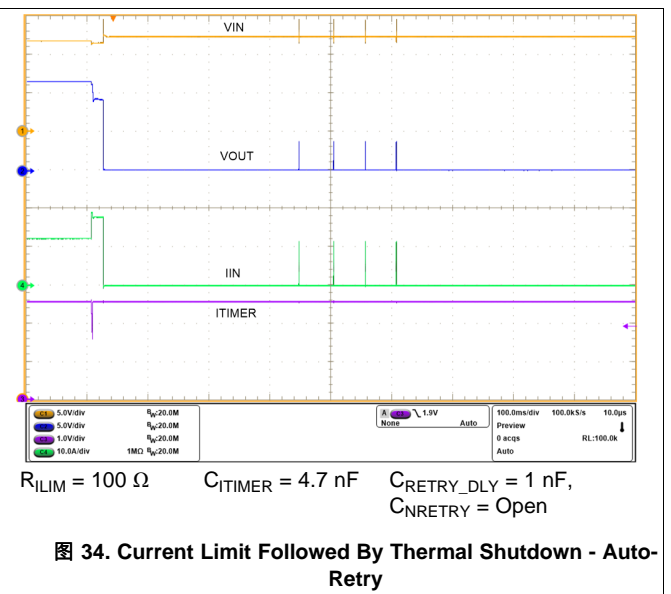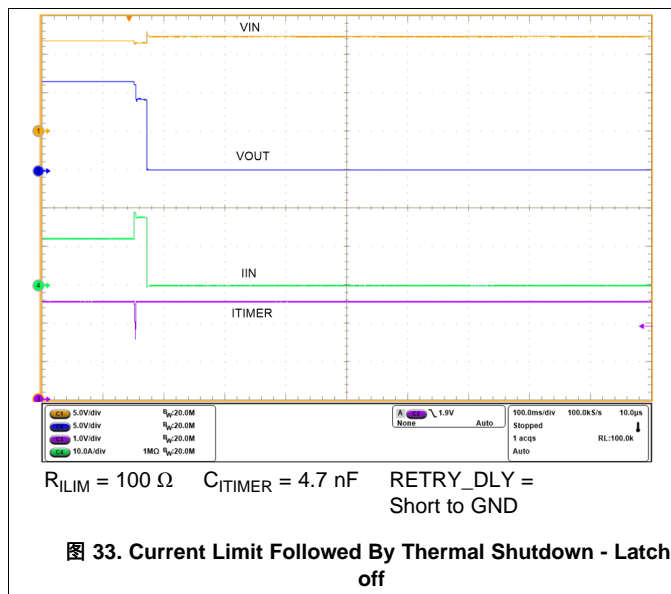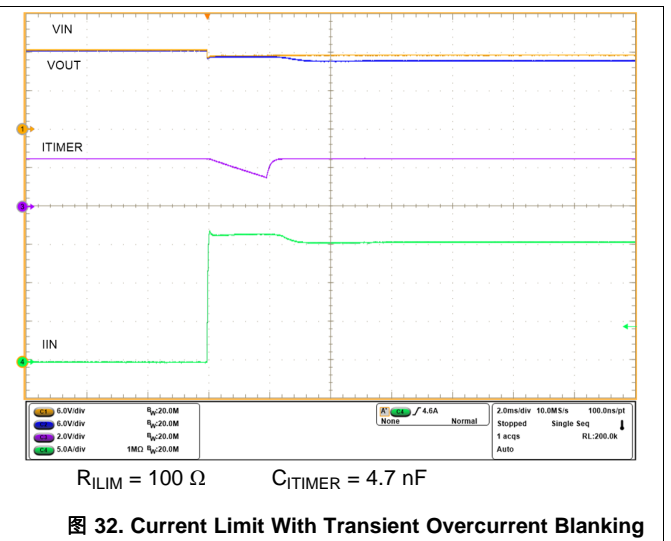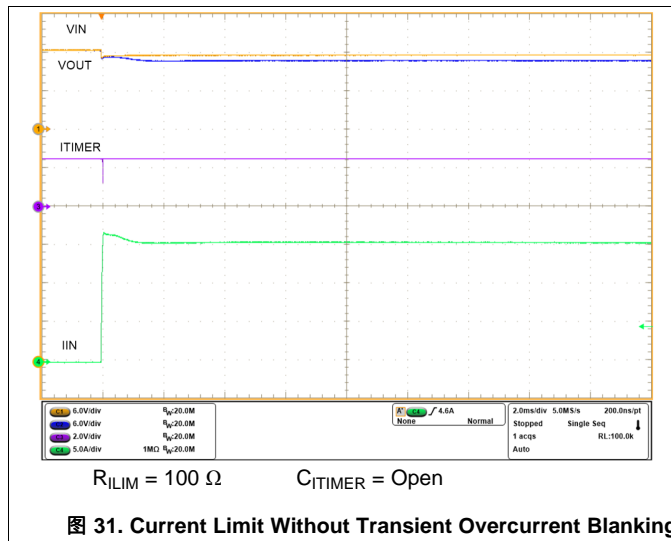

Typical Characteristics (接下页)

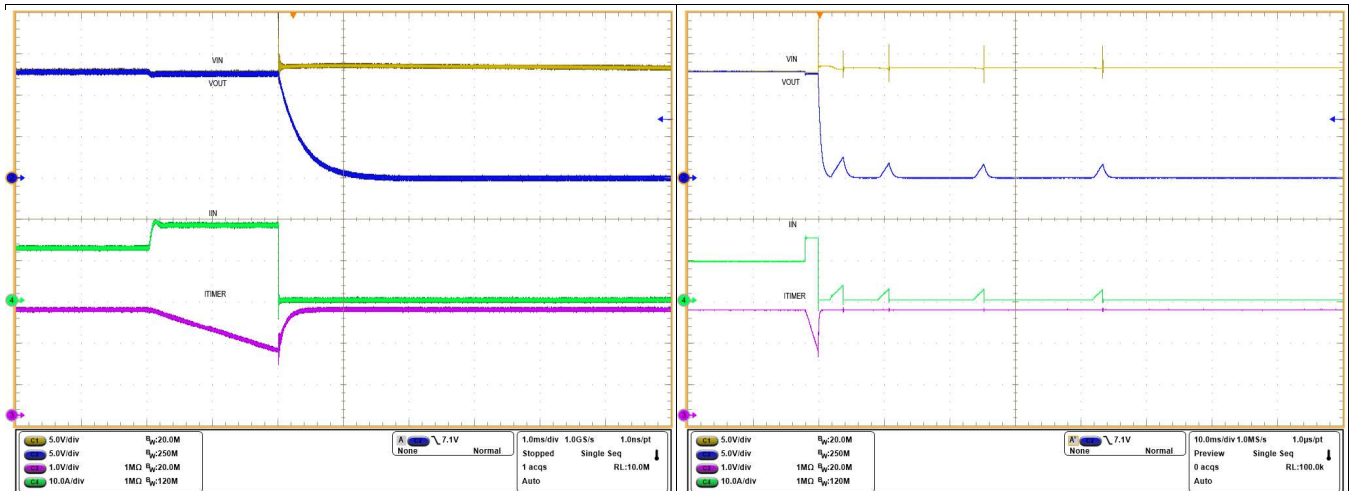


$R_{LIM} = 100 \Omega$        $C_{ITIMER} = 4.7 \text{ nF}$


$R_{LIM} = 100 \Omega$        $C_{ITIMER} = 4.7 \text{ nF}$        $C_{RETRY\_DLY} = \text{Open}$ ,  
 $C_{NRETRY} = \text{Open}$

图 35. Circuit Breaker With Transient Overcurrent Blanking

图 36. Circuit Breaker - Auto-Retry

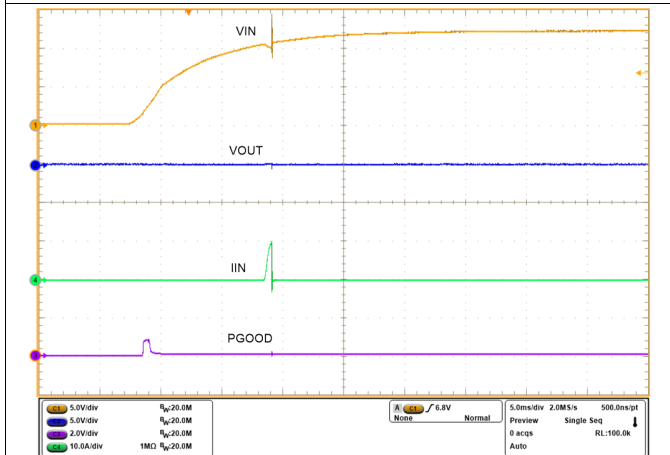

$R_{LIM} = 100 \Omega$

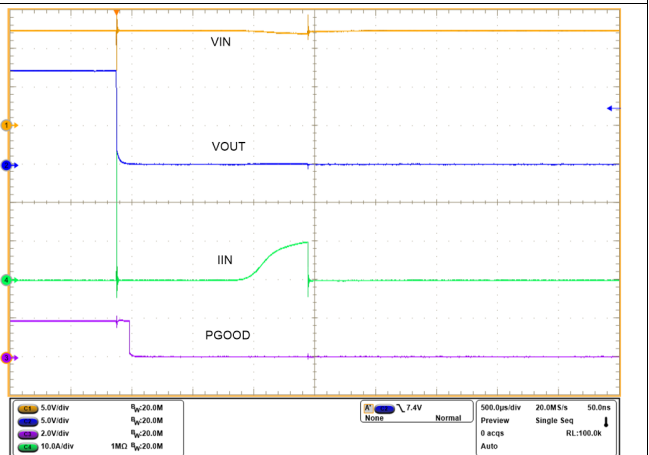


$R_{LIM} = 100 \Omega$

图 37. Power Up Into Output Short-Circuit


图 38. Output Hard Short-Circuit While ON

Typical Characteristics (接下页)

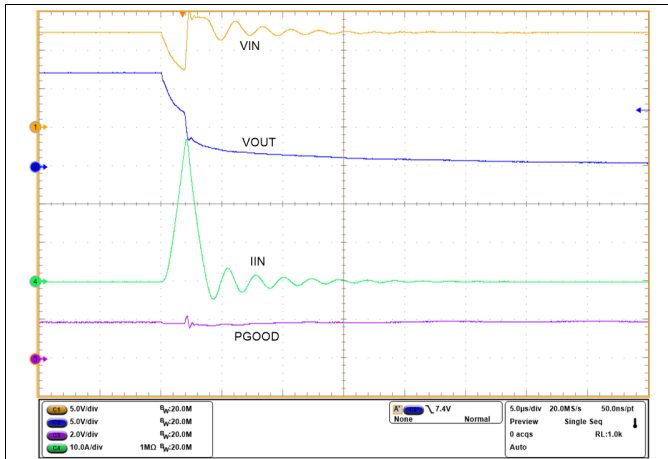


$R_{ILIM} = 100 \Omega$

图 39. Output Hard Short-Circuit While ON (Zoomed In)

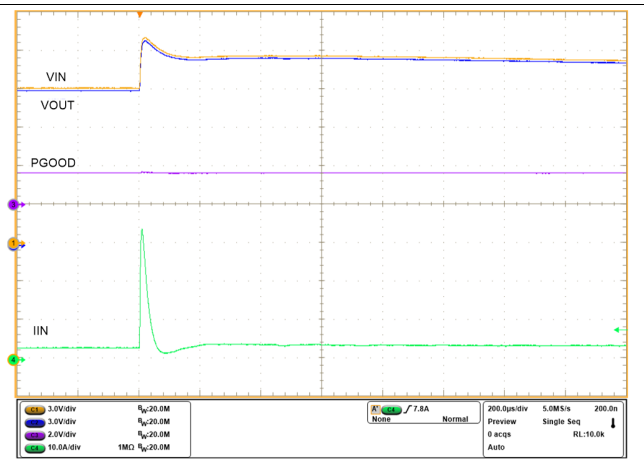

$R_{ILIM} = 332 \Omega$

图 40. Supply Line Transient Immunity - Input Voltage Step

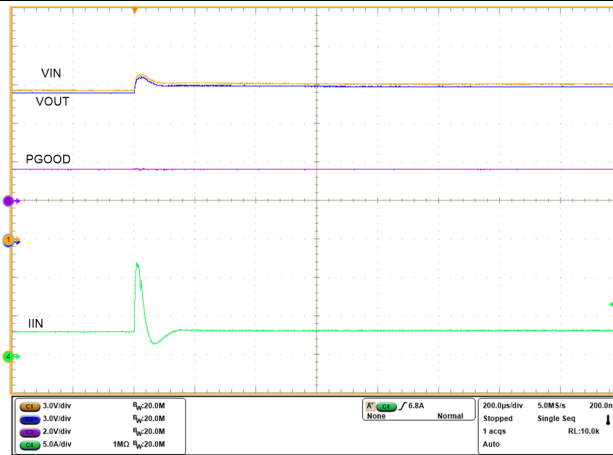

$R_{ILIM} = 511 \Omega$

图 41. Supply Line Transient Immunity - Adjacent Load Hot Unplug




## 8 Detailed Description

### 8.1 Overview

The TPS25982 device is a smart eFuse with integrated power switch that is used to manage load voltage and load current. The device starts its operation by monitoring the IN bus. When  $V_{IN}$  is above the Undervoltage Protection threshold ( $V_{UVP}$ ) and below the Overvoltage Protection threshold ( $V_{OVP}$ ), the device samples the EN/UVLO pin. A high level on this pin enables the internal MOSFET to start conducting and allow current to flow from IN to OUT. When EN/UVLO is held low, the internal MOSFET is turned off. After a successful start-up sequence, the device now actively monitors its load current, input voltage and protects the load from harmful overcurrent and overvoltage conditions. The device also relies on a built-in thermal sense circuit to shut down and protect itself in case the device internal temperature ( $T_j$ ) exceeds the safe operating conditions.

### 8.2 Functional Block Diagram

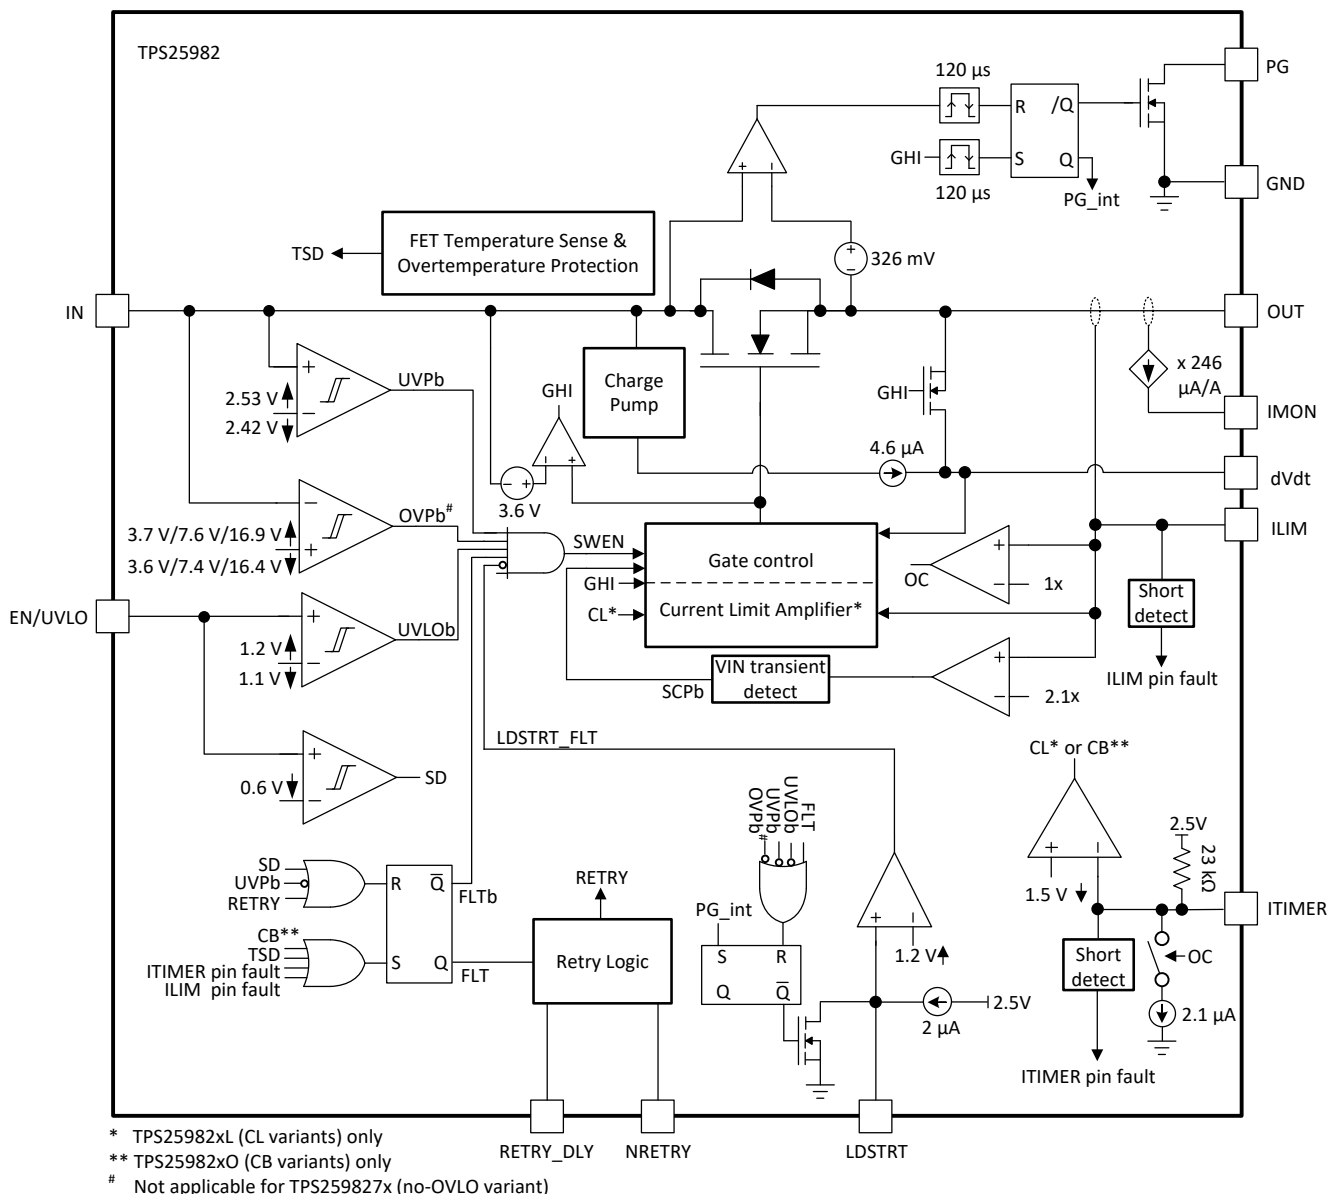

## 8.3 Feature Description

The TPS25982 eFuse is a compact, feature rich power management device that provides detection, protection and indication in the event of system faults.

### 8.3.1 Undervoltage Protection (UVLO and UVP)

The TPS25982 implements Undervoltage Protection on IN to turn off the output in case the applied voltage becomes too low for the downstream load or the device to operate correctly. The Undervoltage Protection has a default internal threshold of  $V_{UVLP}$ . If needed, it is also possible to set a user defined Undervoltage Protection threshold higher than  $V_{UVLP}$  using the UVLO comparator on the EN/UVLO pin. 图 42 和 公式 1 show how a resistor divider from supply to GND can be used to set the UVLO set point for a given voltage supply level.

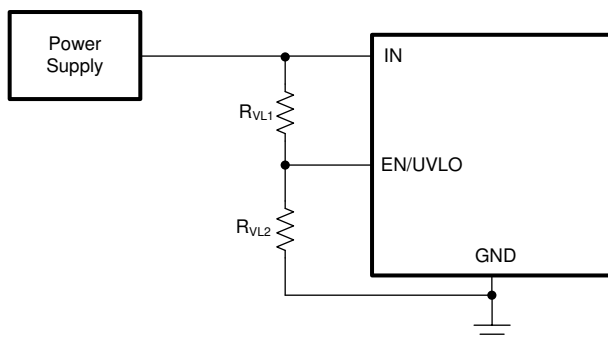


图 42. Adjustable Supply UVLO Threshold

$$V_{INUVLO} = \frac{V_{UVLO(R)} \times (R_{VL1} + R_{VL2})}{R_{VL2}} \quad (1)$$

The resistors must be sized large enough to minimize the constant leakage from supply to ground through the resistor divider network. At the same time, keep the current through the resistor network sufficiently larger (20x) than the leakage current on the EN/UVLO pin to minimize the error in the resistor divider ratio.

### 8.3.2 Overvoltage Protection (OVP)

The TPS25982 implements Overvoltage Lock-Out (OVLO) on IN to protect the output load in the event of input overvoltage. When the input exceeds the Overvoltage Protection threshold ( $V_{OVLP(R)}$ ) the device turns off the output within  $t_{OVP}$ . As long as an overvoltage condition is present on the input, the device stays disabled and the output will be turned off. Once the input voltage returns to the normal operating range, the device attempts to start up normally.

Feature Description (接下页)

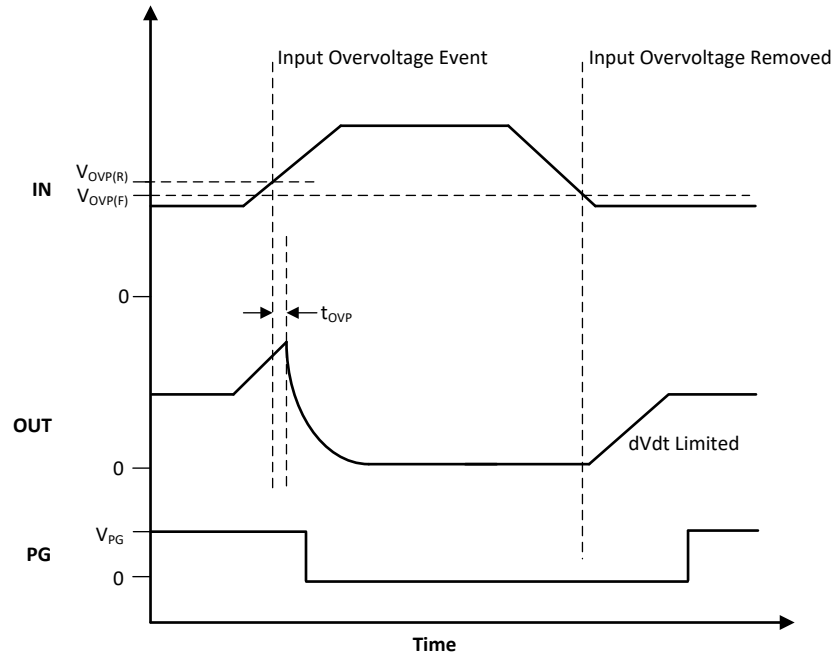


图 43. Overvoltage Response

There are multiple device options with different fixed overvoltage thresholds to choose from, including one without internal overvoltage protection. See the [Device Comparison Table](#) for a list of available options.

8.3.3 Inrush Current, Overcurrent, and Short-Circuit Protection

TPS25982 devices incorporate three levels of protection against overcurrent:

- Adjustable slew rate (dVdt) for inrush current control
- Adjustable overcurrent protection (with adjustable blanking timer) - Circuit Breaker or Active Current Limiter to protect against soft overload conditions
- Adjustable fast-trip response to quickly protect against severe overcurrent (short-circuit) faults

8.3.3.1 Slew Rate and Inrush Current Control (dVdt)

During hot-plug events or while trying to charge a large output capacitance, there can be a large inrush current. If the inrush current is not controlled, it can damage the input connectors and/or cause the system power supply to droop leading to unexpected restarts elsewhere in the system. The TPS25982 provides integrated output slew rate (dVdt) control to manage the inrush current during start-up. The inrush current is directly proportional to the load capacitance and rising slew rate. The following equation can be used to calculate the slew rate (SR) required to limit the inrush current ( $I_{INRUSH}$ ) for a given load capacitance ( $C_{OUT}$ ):

$$SR(V/ms) = \frac{I_{INRUSH}(mA)}{C_{OUT}(\mu F)} \tag{2}$$

An external capacitance can be connected to the dVdt pin to control the rising slew rate and lower the inrush current during turn on. The required  $C_{dVdt}$  capacitance to produce a given slew rate can be calculated using the following formula:

$$C_{dVdt}(pF) = \frac{4600}{SR(V/ms)} \tag{3}$$

The fastest output slew rate is achieved by leaving the dVdt pin open.

## Feature Description (接下页)

### 8.3.3.2 Circuit Breaker

The TPS25982xO (Circuit Breaker) variants respond to output overcurrent conditions by turning off the output after a user adjustable transient fault blanking interval. When the load current exceeds the programmed current limit threshold ( $I_{LIM}$  set by the ILIM pin resistor  $R_{ILIM}$ ), but lower than the fast-trip threshold ( $2.1 \times I_{LIM}$ ), the device starts discharging the ITIMER pin capacitor using an internal pull-down current ( $I_{ITIMER}$ ). If the load current drops below the current limit threshold before the ITIMER capacitor drops by  $\Delta V_{ITIMER}$ , the circuit breaker action is not engaged and the ITIMER is reset by pulling it up to  $V_{INT}$  internally. This allows short transient overcurrent pulses to pass through the device without tripping the circuit. If the overcurrent condition persists, the ITIMER capacitor continues to discharge and once it falls by  $\Delta V_{ITIMER}$ , the circuit breaker action turns off the FET immediately. The following equation can be used to calculate the  $R_{ILIM}$  value for a desired current limit threshold.

$$R_{ILIM}(\Omega) = \frac{1460}{I_{LIM}(A) - 0.11} \quad (4)$$

#### 注

Leaving the ILIM pin Open sets the current limit to zero and causes the FET to shut off as soon as any load current is detected. Shorting the ILIM pin to ground at any point during normal operation is detected as a fault and the part shuts down. The ILIM pin Short to GND fault detection circuit requires a minimum amount of load current ( $I_{CB}$ ) to flow through the device. This ensures robust eFuse behavior even under single point failure conditions. Refer to the [Fault Response](#) section for details on the device behavior after a fault.

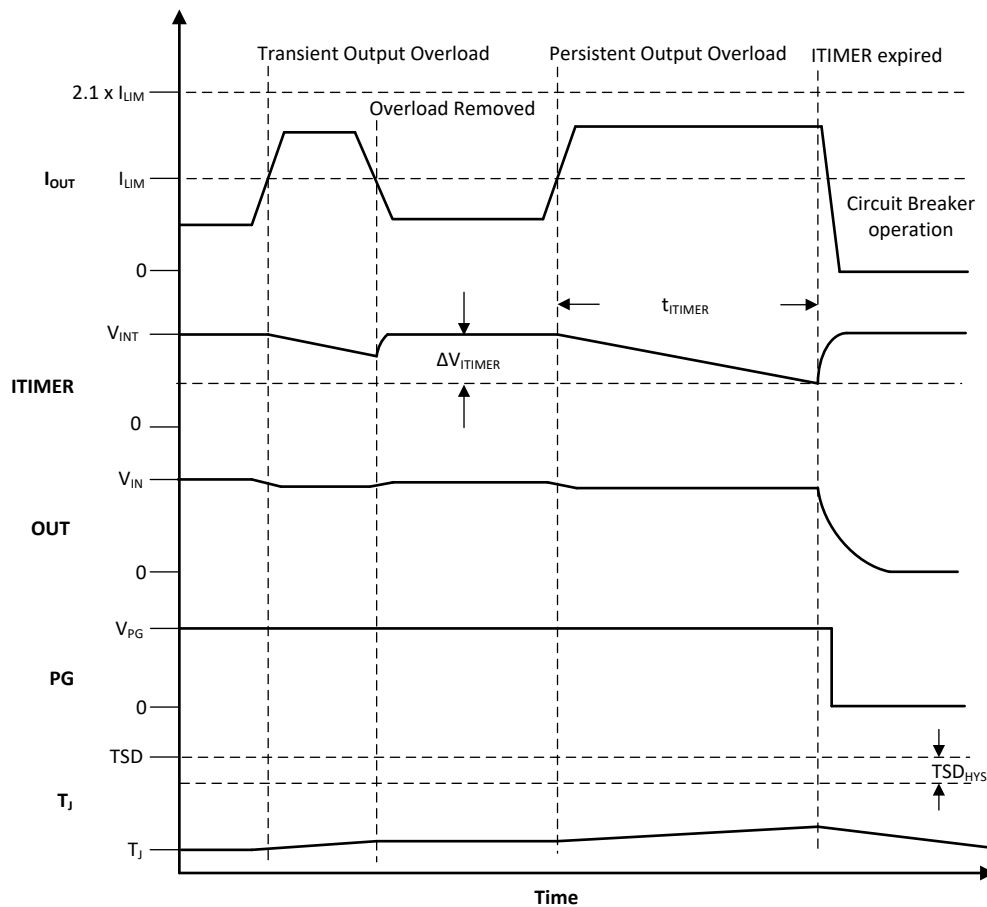


图 44. Circuit Breaker Response

## Feature Description (接下页)

The duration for which load transients are allowed can be adjusted using an appropriate capacitor value from ITIMER pin to ground. The transient overcurrent blanking interval can be calculated using [公式 5](#).

$$t_{\text{ITIMER}} (\text{ms}) = \frac{C_{\text{ITIMER}} (\text{nF}) \times \Delta V_{\text{ITIMER}} (\text{V})}{I_{\text{ITIMER}} (\mu\text{A})} \quad (5)$$

Leave the ITIMER pin open to allow the part to break the circuit with the minimum possible delay.

**表 1. Device ITIMER Functional Mode Summary**

| ITIMER Pin Connection | Timer Delay before Overcurrent response |
|-----------------------|---|
| OPEN                  | 0 s                                     |
| Capacitor to ground   | As per <a href="#">公式 5</a>             |
| Short to GND          | ITIMER Pin Fault - Part Shuts Off       |

### 注

1. Shorting the ITIMER pin to ground is detected as a fault and the part shuts down. This ensures robust eFuse behavior even in case of single point failure conditions. Refer to the [Fault Response](#) section for details on the device behavior after a fault.

2. Larger ITIMER capacitors take longer to charge during start-up and may lead to incorrect fault assertion if the ITIMER voltage is still below the pin short detection threshold after the device has reached steady state. To avoid this, it is recommended to limit the maximum ITIMER capacitor to the value suggested by the equation below.

$$C_{\text{ITIMER}} < \frac{t_{\text{GHI}}}{53000}$$

$$t_{\text{GHI}} = t_{\text{D,ON}} + C_{\text{dvdt}} \times \left( \frac{V_{\text{IN}} + 3.6\text{V}}{I_{\text{dvdt}}} \right)$$

Where

- $t_{\text{GHI}}$  is the time taken by the device to reach steady state
- $t_{\text{D,ON}}$  is the device turn-on delay
- $C_{\text{dvdt}}$  is the dVdt capacitance
- $I_{\text{dvdt}}$  is the dVdt charging current

It is possible to avoid incorrect ITIMER pin fault assertion and achieve higher ITIMER intervals if needed by increasing the dVdt capacitor value accordingly, but at the expense of higher start-up time.

Once the part shuts down due to a Circuit Breaker fault, it can be configured to either stay latched off or restart automatically. Refer to the [Fault Response](#) section for details.

### 8.3.3.3 Active Current Limiting

The TPS25982xL (Current Limiter) variants respond to output overcurrent conditions by actively regulating the current to a set limit after a user adjustable fault blanking interval. When the load current exceeds the programmed current limit threshold ( $I_{\text{LIM}}$  set by the ILIM pin resistor  $R_{\text{ILIM}}$ ), but lower than the fast-trip threshold ( $2.1 \times I_{\text{LIM}}$ ), the device starts discharging the ITIMER pin capacitor using an internal pull-down current ( $I_{\text{ITIMER}}$ ). If the load current drops below the current limit threshold before the ITIMER capacitor voltage drops by  $\Delta V_{\text{ITIMER}}$ , the current limit action is not engaged and the ITIMER is reset by pulling it up to  $V_{\text{INT}}$  internally. This allows short transient overcurrent pulses to pass through the device without limiting the current. If the overcurrent condition persists, the ITIMER capacitor continues to discharge and once it falls by  $\Delta V_{\text{ITIMER}}$ , the device regulates the FET gate voltage to actively limit the output current to the set  $I_{\text{LIM}}$  level. The device will exit current limiting when the load current falls below  $I_{\text{LIM}}$ . [公式 6](#) can be used to calculate the  $R_{\text{ILIM}}$  value for a desired current limit.

$$R_{ILIM}(\Omega) = \frac{1460}{I_{LIM}(A) - 0.11} \tag{6}$$

注

Leaving the ILIM pin Open sets the current limit to zero and causes the FET to shut off as soon as any load current is detected. Shorting the ILIM pin to ground at any point during normal operation is detected as a fault and the part shuts down. The ILIM pin Short to GND fault detection circuit requires a minimum amount of load current ( $I_{CB}$ ) to flow through the device. This ensures robust eFuse behavior even under single point failure conditions. Refer to the [Fault Response](#) section for details on the device behavior after a fault.

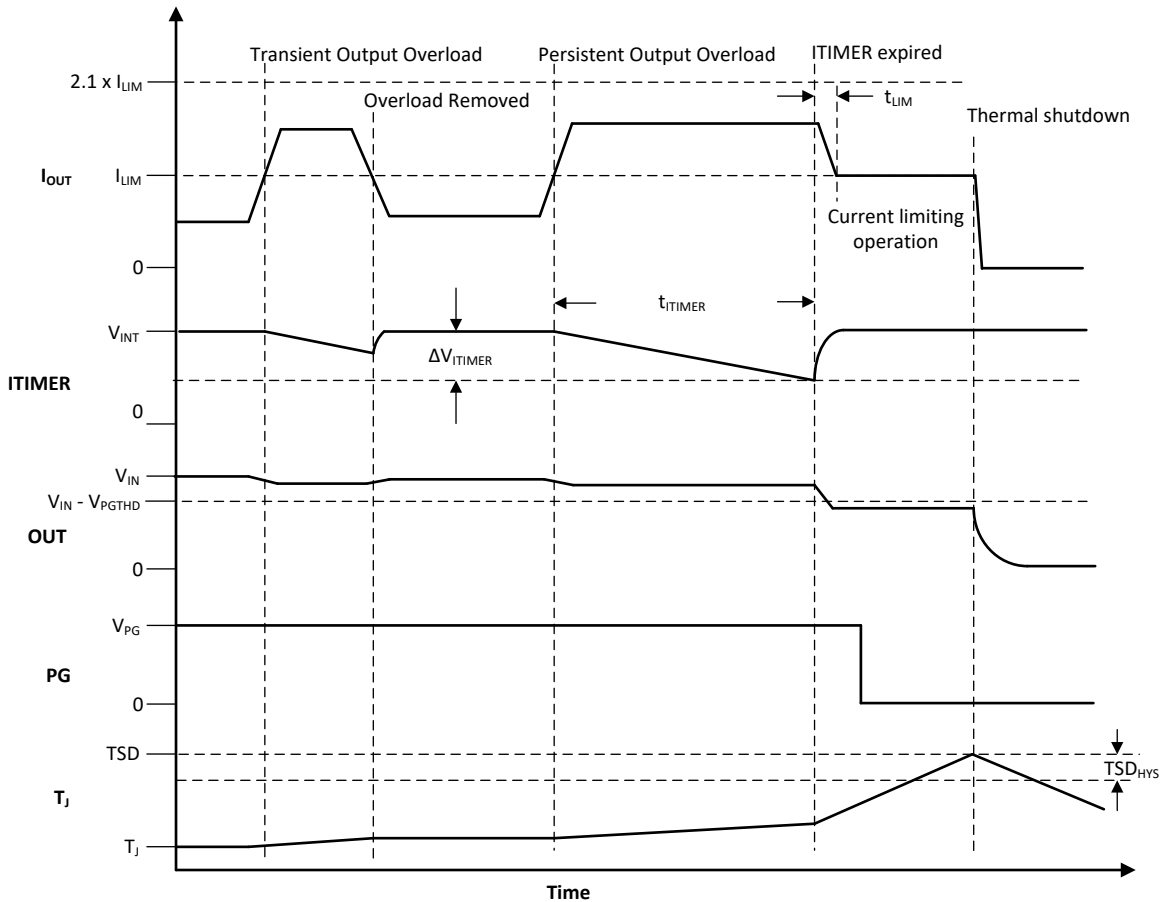


图 45. Active Current Limiter Response

The duration for which load transients are allowed can be adjusted using an appropriate capacitor value from ITIMER pin to ground. The transient overcurrent blanking interval can be calculated using 公式 7.

$$t_{TIMER} (ms) = \frac{C_{ITIMER} (nF) \times \Delta V_{ITIMER} (V)}{I_{ITIMER} (\mu A)} \tag{7}$$

Leave the ITIMER pin open to allow the part to activate the current limit with the minimum possible delay. Refer to [ITIMER Functional Mode Summary](#) for more details.

**注**

1. Current limiting based on  $R_{LIM}$  is active during startup for both Current Limit and Circuit Breaker variants. In case the startup current exceeds  $I_{LIM}$ , the device regulates the current to the set limit. However, during startup the current limit is engaged without waiting for the ITIMER delay.
2. Shorting the ITIMER pin to ground is detected as a fault and the part shuts down. This ensures robust eFuse behavior even in case of single point failure conditions. Refer to the [Fault Response](#) section for details on the device behavior after a fault.
3. Larger ITIMER capacitors take longer to charge during start-up and may lead to incorrect fault assertion if the ITIMER voltage is still below the pin short detection threshold after the device has reached steady state. To avoid this, it is recommended to limit the maximum ITIMER capacitor to the value suggested by the equation below.

$$C_{ITIMER} < \frac{t_{GHI}}{53000}$$

$$t_{GHI} = t_{D,ON} + C_{dvdt} \times \left( \frac{V_{IN} + 3.6V}{I_{dvdt}} \right)$$

Where

- $t_{GHI}$  is the time taken by the device to reach steady state
- $t_{D,ON}$  is the device turn-on delay
- $C_{dvdt}$  is the dVdt capacitance
- $I_{dvdt}$  is the dVdt charging current


It is possible to avoid incorrect ITIMER pin fault assertion and achieve higher ITIMER intervals if needed by increasing the dVdt capacitor value accordingly, but at the expense of higher start-up time.

During current regulation, the output voltage will drop resulting in increased device power dissipation across the FET. If the device internal temperature ( $T_J$ ) exceeds the thermal shutdown threshold (TSD), the FET is turned off. See [Overtemperature Protection \(OTP\)](#) for more details on device response to overtemperature.

#### 8.3.3.4 Short-Circuit Protection

During an output short-circuit event, the current through the device increases very rapidly. When an output short-circuit is detected, the internal fast-trip comparator turns off the output within the  $t_{SC}$ . The comparator employs a scalable threshold which is equal to  $2.1 \times I_{LIM}$ . This enables the user to adjust the fast-trip threshold as per system needs rather than using a fixed threshold which may not be suitable for all systems. After a fast trip event, the device restarts in a current limited mode to try and restore power to the load quickly in case the fast trip was triggered by a transient event. However, if the fault is persistent, the device will stay in current limit causing the junction temperature to rise and eventually enter thermal shutdown. See [Overtemperature Protection \(OTP\)](#) section for details on the device response to overtemperature.

In some of the systems, for example servers or telecom equipment which house multiple hot-pluggable cards connected to a common supply backplane, there can be transients on the supply due to switching of large currents through the inductive backplane. This can result in current spikes on adjacent cards which could be potentially large enough to inadvertently trigger the fast-trip comparator of the eFuse. The TPS25982 uses a proprietary algorithm to avoid nuisance tripping in such cases thereby facilitating un-interrupted system operation.

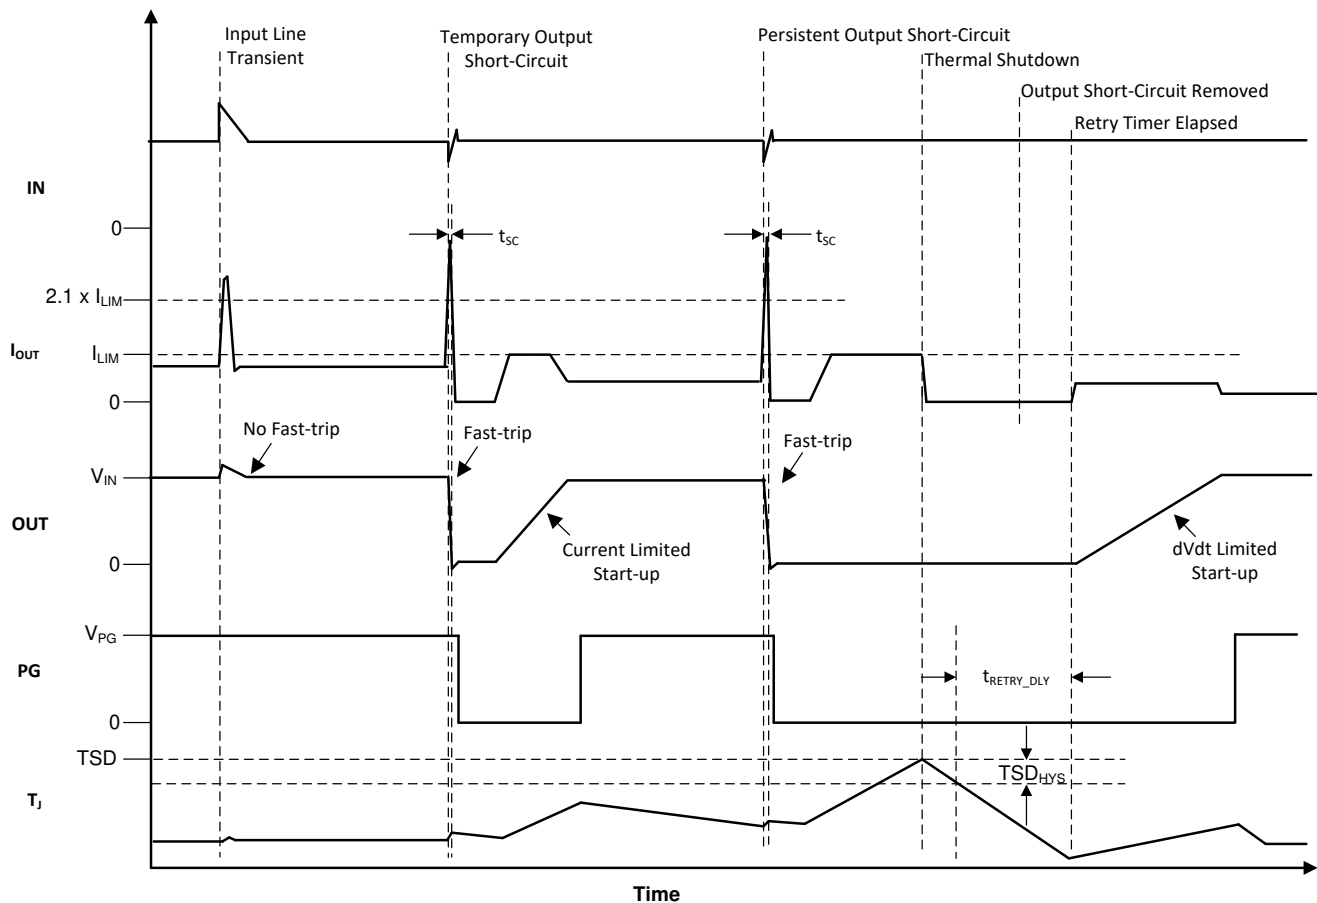
**图 46. Input Line Transient and Output Short-Circuit Response**
**注**

To prevent the current limit/circuit breaker loop from interfering with the input line transient detection logic, TI recommends to set the ITIMER interval higher than 100  $\mu$ s. Refer to [表 1](#) for more details on ITIMER.

### 8.3.4 Overtemperature Protection (OTP)

The device monitors the internal die temperature ( $T_j$ ) at all times and shuts down the part as soon as the temperature exceeds a safe operating level (TSD) thereby protecting the device from damage. The device will not turn back on until the die cools down sufficiently, that is the die temperature falls below ( $TSD - TSD_{Hys}$ ). Thereafter, the part can be configured to either remain latched off or restart automatically. Refer to the [Fault Response](#) section for details.

### 8.3.5 Analog Load Current Monitor (IMON)

The device allows the system to monitor the output load current accurately by providing an analog current on the IMON pin which is proportional to the current through the FET. The user can connect a resistor from IMON to ground to convert this signal to a voltage which can be fed to the input of an Analog-to-Digital Converter. The internal amplifier on the IMON employs chopper based offset cancellation techniques to provide accurate measurement even at lower currents over time and temperature.

$$V_{IMON} (V) = G_{IMON} (\mu A / A) \times I_{OUT} (A) \times R_{IMON} (\Omega) \quad (8)$$



It is recommended to limit the maximum IMON voltage to the values mentioned in *V<sub>IMON(Max)</sub> Recommended Values*. This is to ensure the IMON pin internal amplifier has sufficient headroom to operate linearly.

表 2. V<sub>IMON(MAX)</sub> Recommended Values

| V <sub>IN</sub> | Recommended V <sub>IMON(MAX)</sub> |
|-----------------|------------------------------------|
| 2.7 V           | 1 V                                |
| 3.3 V           | 1.8 V                              |
| > 5 V           | 3.3 V                              |

It is recommended to add a RC low pass filter on the IMON output to filter out any glitches and get a smooth average current measurement. TI recommends a series resistance of 10 kΩ or higher.

### 8.3.6 Power Good (PG)

PG is an active high open drain output which indicates whether the FET is fully turned ON and the output voltage has reached the maximum value. After power-up, PG is pulled low initially. The gate driver circuit starts charging the gate capacitance from the internal charge pump. When the FET gate voltage reaches (V<sub>IN</sub> + 3.6V), PG is asserted after a de-glitch time (t<sub>PGD</sub>). During normal operation, if at any time V<sub>OUT</sub> falls below (V<sub>IN</sub> - V<sub>PGTHD</sub>), PG is de-asserted after a de-glitch time (t<sub>PGD</sub>).

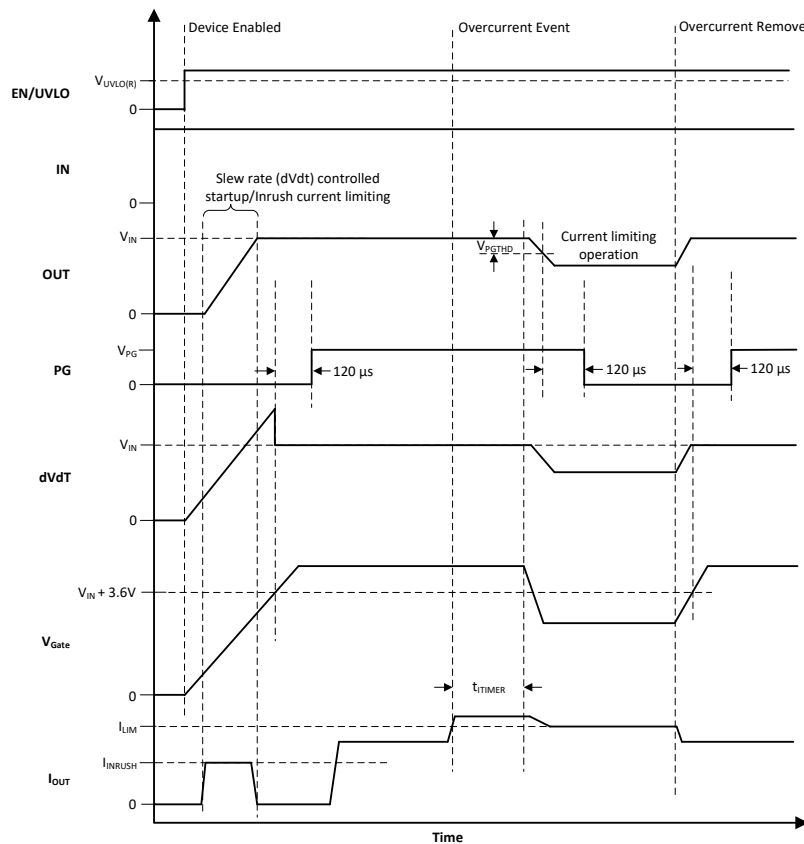


图 47. Power Good Assertion and De-assertion

注

1. When there is no supply to the device, the PG pin is expected to stay low. However, there is no active pull-down in this condition to drive this pin all the way down to 0 V. If the PG pin is pulled up to an independent supply which is present even if the TPS25982 is unpowered, there can be a small voltage seen on this pin depending on the pin sink current, which in turn is a function of the pull-up supply voltage and resistor. Minimize the sink current to keep this pin voltage low enough not to be detected as a logic HIGH by associated external circuits in this condition.

2. The PG pin provides a mechanism to detect a possible failed MOSFET condition during start-up. If the PG does not get asserted for an extended period of time after the device is powered up and enabled, it might be an indication of internal MOSFET failure.

### 8.3.7 Load Detect/Handshake (LDSTRT)

The LDSTRT pin provides a mechanism for the downstream load circuit to indicate to the TPS25982 that the load is present and has powered up successfully. This allows the system to have additional control over the conditions in which power is presented to the load and disconnect the power when the load is not present or unable to provide a valid handshake signal after an expected boot-up time.

Once the TPS25982 completes the startup sequence and the output reaches the full voltage, it asserts the PG signal. At the same time, it also starts charging the capacitor on the LDSTRT pin ( $C_{LDSTRT}$ ) with an internal current source ( $I_{LDSTRT}$ ). If the LDSTRT pin voltage rises above  $V_{LDSTRT}$  before the load circuit pulls it low, the TPS25982 detects the condition as a LDSTRT fault and turns off the FET to power down the load. The time to trigger the LDSTRT fault can be calculated from the following equation:

$$t_{LDSTRT} \text{ (ms)} = \frac{C_{LDSTRT} \text{ (nF)} \times V_{LDSTRT} \text{ (V)}}{I_{LDSTRT} \text{ (\mu A)}} \tag{9}$$

During normal operation, if at any time the load circuit releases the active pull-down on the LDSTRT pin, the capacitor  $C_{LDSTRT}$  would start charging up again and eventually trigger a shutdown due to LDSTRT fault once the capacitor charges up to  $V_{LDSTRT}$ .

Once the TPS25982 turns off due to LDSTRT fault, it can be turned ON again in 3 ways:

- LDSTRT pin is driven low
- Input supply voltage is driven low ( $< V_{UVP(F)}$ ) and then driven high ( $> V_{UVP(R)}$ )
- EN/UVLO voltage is driven low ( $< V_{SD}$ ) and then driven high ( $> V_{UVLO(R)}$ )

Tie the LDSTRT pin to ground if this functionality is not needed.

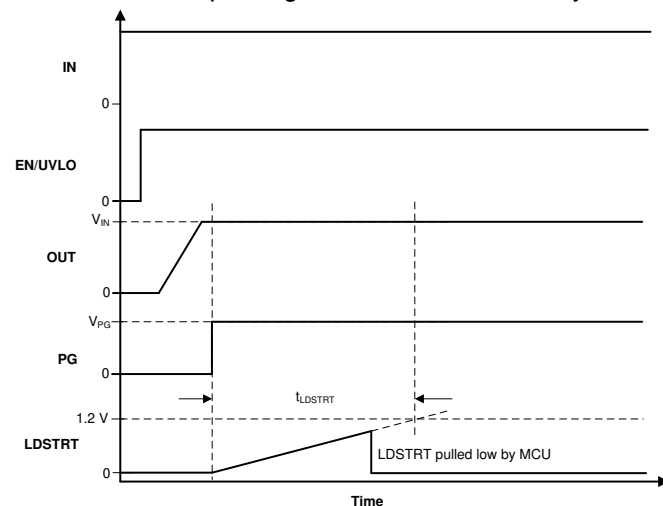


图 48. Successful LDSTRT Handshake

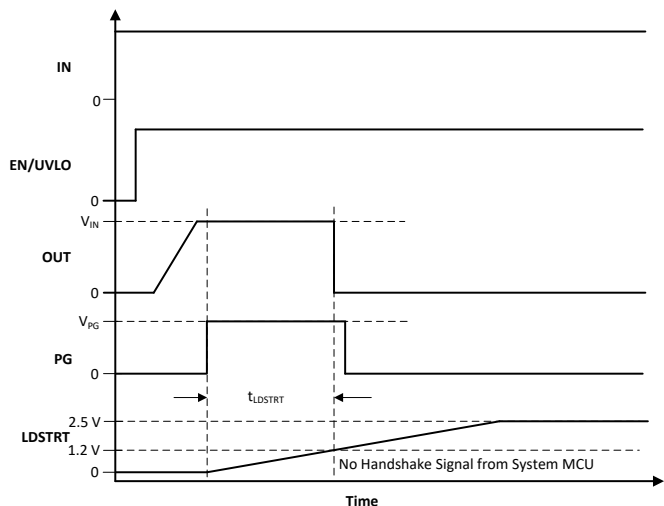


图 49. Unsuccessful LDSTRT Handshake

The LDSTRT pin can also be used to implement a load or module detect function wherein the output power is presented only when the load or module is plugged in. A typical use case for this function is on optical module power supply rails in Switches/Routers or similar networking end equipment. The LDSTRT pin should be tied to a corresponding pin on the module connector which gets pulled low by the module when it is plugged in. An example of such a signal is ModPrsL on QSFP-DD modules.

In this scheme, initially when the TPS25982 is powered up or enabled, the output charges up and PG is asserted. If the module is not plugged in, there is no external pull-down on the LDSTRT pin and the pin voltage starts rising due to internal pull-up. Once the LDSTRT pin voltage exceeds  $V_{LDSTRT}$ , the TPS25982 turns off the output power. If the module is plugged in later, the LDSTRT pin is pulled low by the module and the TPS25982 turns on the output power.

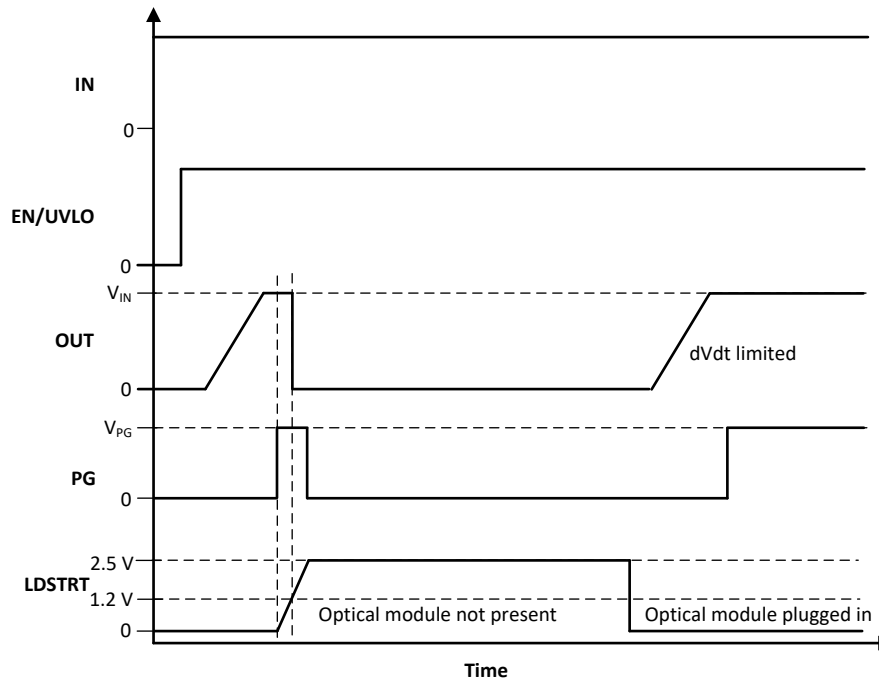


图 50. Optical Module Plug-In Detection Using LDSTRT

## 8.4 Fault Response

The following events trigger an internal fault which causes the device to shut down:

- Overtemperature Protection
- Circuit Breaker Operation
- ITIMER pin Short to GND
- ILIM pin Short to GND

Once the device shuts down due to a fault, even if the associated external fault is subsequently cleared, the fault stays latched internally and the output cannot turn on again until the latch is reset. The fault latch can be externally reset by one of the following methods:

- Input supply voltage is driven low ( $< V_{UVP(F)}$ )
- EN/UVLO voltage is driven low ( $< V_{SD}$ )

The fault latch can also be reset by an internal auto-retry logic. The user can either disable the auto-retry behavior completely (latch-off behavior) or configure the device to auto-retry indefinitely or for a limited number of times before latching off. The auto-retry behavior is controlled by the connections on the RETRY\_DLY and NRETRY pins.

Fault Response (接下页)

表 3. Pin Configurable Fault Response

| EN/UVLO | RETRY_DLY        | NRETRY           | DEVICE STATE   |
|---------|------------------|------------------|--|
| L       | X                | X                | Disabled   |
| H       | Short to GND     | X                | No auto-retry (Latch-off)  |
| H       | Open             | Open             | Auto-retry 4 times with minimum delay between retries and then latch-off             |
| H       | Open             | Short to GND     | Auto-retry indefinitely with minimum delay between retries                           |
| H       | Capacitor to GND | Capacitor to GND | Auto-retry delay and count as per 公式 10 and 公式 11                                    |
| H       | Capacitor to GND | Open             | Auto-retry 4 times with finite delay between retries as per 公式 10 and then latch-off |
| H       | Capacitor to GND | Short to GND     | Auto-retry indefinitely with finite delay between retries as per 公式 10               |

To configure the part for a finite number of auto-retries with a finite auto-retry delay, first choose the capacitor value on RETRY\_DLY pin using the following equation.

$$t_{RETRY\_DLY} (\mu s) = \frac{128 \times (C_{RETRY\_DLY} (pF) + 4 pF) \times V_{RETRY\_DLY\_HYS} (V)}{I_{RETRY\_DLY} (\mu A)} \tag{10}$$

Next, choose the capacitor value on the NRETRY pin using the following equation.

$$N_{RETRY} = \frac{4 \times I_{RETRY\_DLY} (\mu A) \times C_{NRETRY} (pF)}{I_{NRETRY} (\mu A) \times (C_{RETRY\_DLY} (pF) + 4 pF)} \tag{11}$$

The number of auto-retries is quantized to certain discrete levels as shown in 表 4 .

表 4. NRETRY Quantization Levels

| NRETRY Calculated From 公式 11 | NRETRY Actual |
|------------------------------|---------------|
| 0 < N < 4                    | 4             |
| 4 < N < 16                   | 16            |
| 16 < N < 64                  | 64            |
| 64 < N < 256                 | 256           |
| 256 < N < 1024               | 1024          |

表 5. NRETRY and RETRY\_DLY Combination Examples

| Auto Retry Delay    | 915 ms           | 416 ms  | 91.7 ms | 9.3 ms | 3 ms   |
|---------------------|------------------|---------|---------|--------|--------|
| RETRY_DLY Capacitor | 22 nF            | 10 nF   | 2.2 nF  | 220 pF | 68 pF  |
| No. of Auto Retries | NRETRY Capacitor |         |         |        |        |
| 4                   | Open             |         |         |        |        |
| 16                  | 47 nF            | 22 nF   | 4.7 nF  | 1 nF   | 220 pF |
| 64                  | 0.22 μF          | 0.1 μF  | 22 nF   | 2.2 nF | 1 nF   |
| 256                 | 1 μF             | 0.47 μF | 0.1 μF  | 10 nF  | 4.7 nF |
| 1024                | 3.3 μF           | 1.5 μF  | 0.47 μF | 33 nF  | 10 nF  |
| Infinite            | Short to GND     |         |         |        |        |

A spreadsheet design tool [TPS25982xx Design Calculator](#) is also available for simplified calculations.

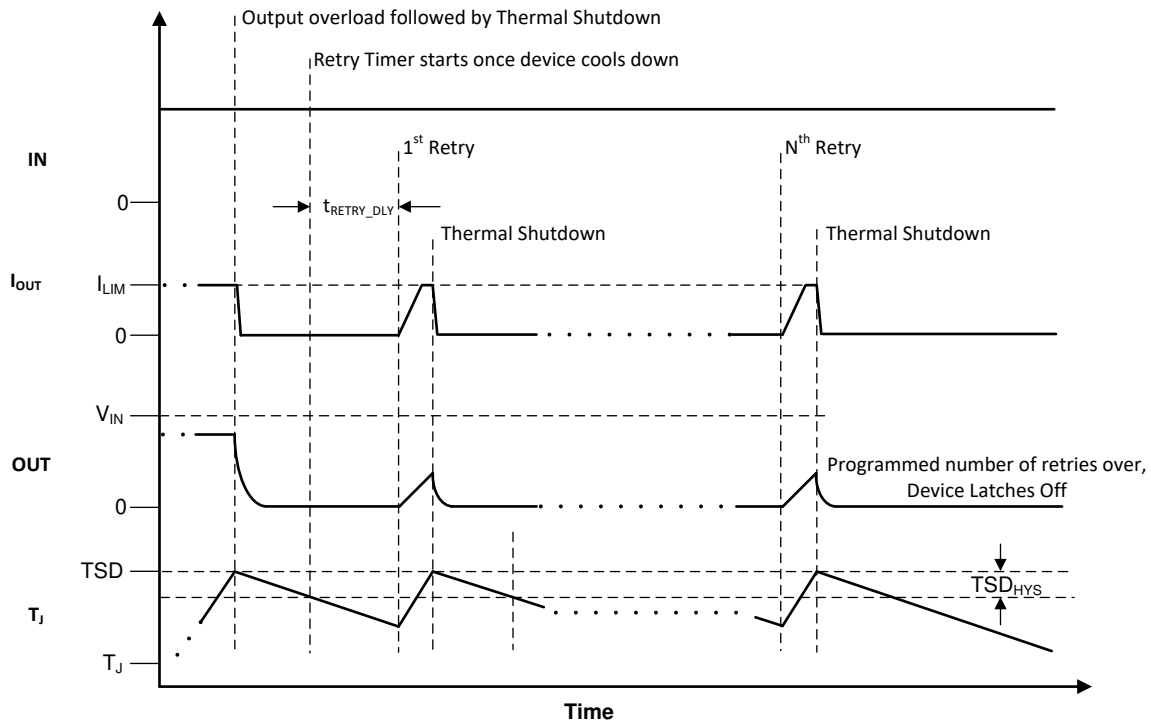


图 51. Auto-Retry After Fault

The auto-retry logic has a mechanism to reset the count to zero if two consecutive faults occur far apart in time. This ensures that the auto-retry response to any later fault is handled as a fresh sequence and not as a continuation of the previous fault. If the fault which triggered the shutdown and subsequent auto-retry cycle is cleared eventually and does not occur again for a duration equal to 7 retry delay timer periods starting from the last fault, the auto-retry logic resets the internal auto-retry count to zero.

### 8.5 Device Functional Modes

The TPS25982 can be pin strapped to support various configurable functional modes.

表 6. LDSTRT Handshake Functional Modes

| EN/UVLO | LDSTRT | DEVICE STATE |
|---------|--------|--------------|
| L       | X      | Disabled     |
| H       | L      | ON           |
| H       | H      | OFF          |

Refer to [Load Detect/Handshake \(LDSTRT\)](#) section for more details.

表 7. Fault Response Functional Modes

| EN/UVLO | RETRY_DLY        | NRETRY           | DEVICE STATE  |
|---------|------------------|------------------|---|
| L       | X                | X                | Disabled  |
| H       | Short to GND     | X                | No auto-retry (Latch-off)   |
| H       | Open             | Open             | Auto-retry 4 times with minimum delay between retries and then latch-off          |
| H       | Open             | Short to GND     | Auto-retry indefinitely with minimum delay between retries                        |
| H       | Capacitor to GND | Capacitor to GND | Auto-retry delay and count as per <a href="#">公式 10</a> and <a href="#">公式 11</a> |

**表 7. Fault Response Functional Modes (接下页)**

| EN/UVLO | RETRY_DLY        | NRETRY       | DEVICE STATE   |
|---------|------------------|--------------|--|
| H       | Capacitor to GND | Open         | Auto-retry 4 times with finite delay between retries as per <a href="#">公式 10</a> and then latch-off |
| H       | Capacitor to GND | Short to GND | Auto-retry indefinitely with finite delay between retries as per <a href="#">公式 10</a>               |

Refer to [Fault Response](#) section for more details.

## 9 Application and Implementation

### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TPS25982 device is an integrated 15-A eFuse that is typically used for hot-swap and power rail protection applications. It operates from 2.7 V to 24 V with adjustable overcurrent and undervoltage protection. It also provides optional overvoltage with various fixed internal thresholds. The device aids in controlling the inrush current and has the flexibility to configure the number of auto-retries and retry delay. The adjustable overcurrent blanking timer provides the functionality to allow transient overcurrent pulses without limiting or tripping. These devices protect source, load and internal MOSFET from potentially damaging events in systems such as Server standby rails, PCIe cards, SSDs, HDDs, Optical Modules, Routers and Switches.

The following design procedure can be used to select the supporting component values based on the application requirement. Additionally, a spreadsheet design tool [TPS25982xx Design Calculator](#) is available in the web product folder.

### 9.2 Typical Application: Standby Power Rail Protection in Datacenter Servers

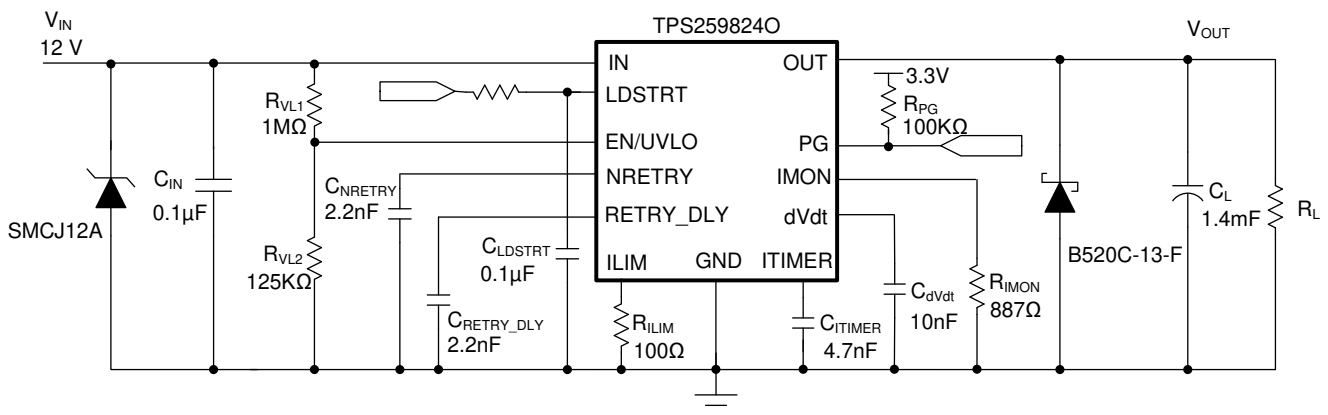


图 52. Typical Application Schematic - Protection for Server Standby Rail

#### 9.2.1 Design Requirements

表 8 shows the design parameters for this application example.

表 8. Design Parameters

| DESIGN PARAMETER   | EXAMPLE VALUE         |
|--|-----------------------|
| Input voltage, $V_{IN}$                                  | 12 V                  |
| Undervoltage lockout set point, $V_{INUVLO}$             | 10.8 V                |
| Maximum load current, $I_{OUT}$                          | 12 A                  |
| Current limit, $I_{LIM}$                                 | 15 A                  |
| Transient overcurrent blanking interval ( $t_{ITIMER}$ ) | 2 ms                  |
| Load capacitance, $C_{OUT}$                              | 1.4 mF                |
| Load at start-up, $R_{L(SU)}$                            | 10 $\Omega$           |
| Output voltage ramp time, $T_{dVdt}$                     | 20 ms                 |
| Maximum ambient temperature, $T_A$                       | 70 $^{\circ}\text{C}$ |

**Typical Application: Standby Power Rail Protection in Datacenter Servers (接下页)**
**表 8. Design Parameters (接下页)**

|                                      |        |
|--------------------------------------|--------|
| LDSTRT handshake delay, $t_{LDSTRT}$ | 60 ms  |
| Retry delay, $t_{RETRY\_DLY}$        | 100 ms |
| No. of retries, $N_{RETRY}$          | 4      |

**9.2.2 Detailed Design Procedure**
**9.2.2.1 Device Selection**

This design example considers a 12-V system operating voltage with a tolerance of  $\pm 10\%$ . The rated load current is 12 A. If the current exceeds 15 A, then the device must allow overload current for 2-ms interval before breaking the circuit and then restart. Accordingly, the TPS259824O variant is chosen. (Refer to [Device Comparison Table](#) for device options.) Ambient temperatures may range from 20 °C to 70 °C. The load has a minimum input capacitance of 1.4 mF and start-up resistive load of 10  $\Omega$ . The downstream load is turned on only after the PG signal is asserted.

**9.2.2.2 Setting the Current Limit Threshold:  $R_{ILIM}$  Selection**

The  $R_{ILIM}$  resistor at the ILIM pin sets the overload current limit, whose value can be calculated using [公式 12](#).

$$R_{ILIM}(\Omega) = \frac{1460}{I_{LIM(A)} - 0.11} \quad (12)$$

For  $I_{LIM} = 15$  A,  $R_{ILIM}$  value is calculated to be 98.05  $\Omega$ . Choose the closest available standard value: 100  $\Omega$ , 1%. Referring to the Electrical Characteristics table, it can be verified that the minimum current limit across temperature for  $R_{ILIM}$  value of 100  $\Omega$  is 12.85 A, which is higher than the nominal rated load current (12 A), thereby ensuring stable operation under normal conditions.

**9.2.2.3 Setting the Undervoltage Lockout Set Point**

The undervoltage lockout (UVLO) trip point is adjusted using the external voltage divider network of  $R_{VL1}$  and  $R_{VL2}$  connected between IN, EN/UVLO and GND pins of the device. The resistor values required for setting the undervoltage are calculated using [公式 13](#).

$$V_{INUVLO} = \frac{V_{UVLO(R)} \times (R_{VL1} + R_{VL2})}{R_{VL2}} \quad (13)$$

For minimizing the input current drawn from the power supply, TI recommends to use higher values of resistance for  $R_{VL1}$  and  $R_{VL2}$ . However, leakage currents due to external active components connected to the resistor string can add error to these calculations. So, the resistor string current,  $I_{RVL12}$  must be 20 times greater than the leakage current ( $I_{ENLKG}$ ).

From the device electrical specifications, UVLO rising threshold  $V_{UVLO(R)} = 1.2$  V. From design requirements,  $V_{INUVLO} = 10.8$  V. First choose the value of  $R_{VL1} = 1$  M $\Omega$  and use [公式 13](#) to calculate  $R_{VL2} = 125$  k $\Omega$ .

Use the closest standard 1% resistor values:  $R_{VL1} = 1$  M $\Omega$ , and  $R_{VL2} = 125$  k $\Omega$

**9.2.2.4 Choosing the Current Monitoring Resistor:  $R_{IMON}$** 

Voltage at IMON pin  $V_{IMON}$  is proportional to the output load current. This can be connected to an ADC of the downstream system for monitoring the operating condition and health of the system. The  $R_{IMON}$  must be selected based on the maximum load current and the maximum IMON pin voltage at full-scale load current. The maximum IMON pin voltage must be selected based on the input voltage range of the ADC used or the value suggested in [VIMON\(Max\) Recommended Values](#), whichever is lower.  $R_{IMON}$  is set using [公式 14](#).

$$R_{IMON}(\Omega) = \frac{V_{IMONmax}(V)}{I_{OUTmax}(A) \times 246 \times 10^{-6}} \quad (14)$$

For  $I_{LIM} = 15$  A and considering the operating range of ADC to be 0 V to 3.3 V,  $R_{IMON}$  can be calculated as



$$R_{\text{IMON}} = \frac{3.3}{15 \times 246 \times 10^{-6}} = 894 \, \Omega \quad (15)$$

Selecting  $R_{\text{IMON}}$  value less than shown in [公式 15](#) ensures that ADC limits are not exceeded for maximum value of load current. Choose closest available standard value: 887  $\Omega$ , 1 %.

### 9.2.2.5 Setting the Output Voltage Ramp Time ( $T_{\text{dVdt}}$ )

For a successful design, the junction temperature of device must be kept below the absolute maximum rating during both dynamic (start-up) and steady state conditions. Dynamic power stresses often are an order of magnitude greater than the static stresses, so it is important to determine the right start-up time and in-rush current limit required with system capacitance to avoid thermal shutdown during start-up with and without load.

The required ramp-up capacitor  $C_{\text{dVdt}}$  is calculated considering the two possible cases (see [Case 1: Start-Up Without Load: Only Output Capacitance  \$C\_{\text{OUT}}\$  Draws Current](#) and [Case 2: Start-Up With Load: Output Capacitance  \$C\_{\text{OUT}}\$  and Load Draw Current](#))

#### 9.2.2.5.1 Case 1: Start-Up Without Load: Only Output Capacitance $C_{\text{OUT}}$ Draws Current

During start-up, as the output capacitor charges, the voltage drop as well as the power dissipated across the internal FET decreases. The average power dissipated in the device during start-up is calculated using [公式 16](#)

$$P_{\text{D(INRUSH)}} = 0.5 \times V_{\text{IN}} \times I_{\text{INRUSH}} \quad (16)$$

Where  $I_{\text{INRUSH}}$  is the inrush current and is determined by [公式 17](#)

$$I_{\text{INRUSH}} = C_{\text{OUT}} \times \frac{V_{\text{IN}}}{T_{\text{dVdt}}} \quad (17)$$

[公式 16](#) assumes that the load does not draw any current (apart from the capacitor charging current) until the output voltage has reached its final value.

#### 9.2.2.5.2 Case 2: Start-Up With Load: Output Capacitance $C_{\text{OUT}}$ and Load Draw Current

When the load draws current during the turn-on sequence, there is additional power dissipated. Considering a resistive load during start-up  $R_{\text{L(SU)}}$ , load current ramps up proportionally with increase in output voltage during  $T_{\text{dVdt}}$  time. [公式 18](#) shows the average power dissipation in the internal FET during charging time due to resistive load.

$$P_{\text{D(LOAD)}} = \left( \frac{1}{6} \right) \times \frac{V_{\text{IN}}^2}{R_{\text{L(SU)}}} \quad (18)$$

[公式 19](#) gives the total power dissipated in the device during start-up

$$P_{\text{D(STARTUP)}} = P_{\text{D(INRUSH)}} + P_{\text{D(LOAD)}} \quad (19)$$

The power dissipation, with and without load, for selected start-up time must not exceed the start-up thermal shutdown limits as shown in [Thermal Shutdown Plot During Start-up](#)

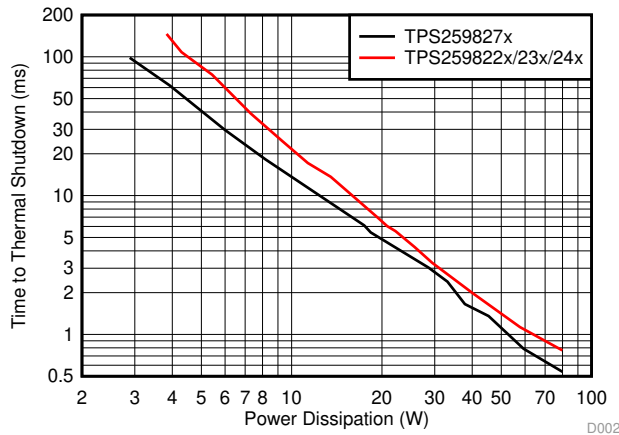


图 53. Thermal Shutdown Plot During Start-up

For the design example under discussion, the output voltage has to be ramped up in 20 ms, which mandates a slew-rate of 0.6 V/ms for a 12 V rail.

The required  $C_{dVdt}$  capacitance on dVdt pin to set 0.6 V/ms slew rate can be calculated using 公式 20

$$C_{dVdt}(\text{pF}) = \frac{4600}{SR(\text{V/ms})} = 7666 \text{ pF} \tag{20}$$

The dVdt capacitor is subjected to typically  $V_{IN} + 4 \text{ V}$  during startup. The high voltage bias leads to a drop in the effective capacitor value. So, it is suggested to choose 20% higher than the calculated value, which gives 9.2 nF. Choose closest 10% standard value: 10 nF

The 10 nF  $C_{dVdt}$  capacitance sets a slew-rate of 0.46 V/ms and output ramp time  $T_{dVdt}$  of 26 ms.

The inrush current drawn by the load capacitance  $C_{OUT}$  during ramp-up can be calculated using 公式 21

$$I_{INRUSH} = 1.4 \text{ mF} \times \frac{12 \text{ V}}{26 \text{ ms}} = 0.65 \text{ A} \tag{21}$$

The inrush power dissipation can be calculated using 公式 22

$$P_{D(INRUSH)} = 0.5 \times 12 \times 0.65 = 3.9 \text{ W} \tag{22}$$

For 3.9 W of power loss, the thermal shutdown time of the device must be greater than the ramp-up time  $T_{dVdt}$  to ensure a successful start-up. 图 53 shows the start-up thermal shutdown limit. For 3.9 W of power, the shutdown time is approximately 100 ms. So it is safe to use 26 ms as the start-up time without any load on the output.

The additional power dissipation when a 10-Ω load is present during start-up is calculated using 公式 23

$$P_{D(LOAD)} = \left(\frac{1}{6}\right) \times \frac{12^2}{10} = 2.4 \text{ W} \tag{23}$$

The total device power dissipation during start-up can be calculated using 公式 24

$$P_{D(STARTUP)} = 3.9 + 2.4 = 6.3 \text{ W} \tag{24}$$

From *Thermal Shutdown Plot During Start-up*, the thermal shutdown time for 6.3 W is approximately 40 ms. It is safe to have 30% margin to allow for variation of system parameters such as load, component tolerance, and input voltage. So it is well within acceptable limits to use the 10 nF for  $C_{dVdt}$  capacitor with start-up load of 10 Ω.

When  $C_{OUT}$  is large, there is a need to decrease the power dissipation during start-up. This can be done by increasing the value of the  $C_{dVdt}$  capacitor. A spreadsheet tool *TPS25982xx Design Calculator* available on the web can be used for iterative calculations.

### 9.2.2.6 Setting the Load Handshake (LDSTRT) Delay

To indicate a successful start-up, the load circuit must provide a handshake signal to TPS25982 by pulling down the LDSTRT pin within the time set by the capacitor  $C_{LDSTRT}$  on the LDSTRT pin. Once the PG asserts, the device sources 2- $\mu$ A current into  $C_{LDSTRT}$ . For a successful handshake, the load circuit must pull-down the LDSTRT pin before  $C_{LDSTRT}$  charges up to 1.2 V.

For the design requirement of 60-ms handshake delay, use [公式 25](#) to calculate  $C_{LDSTRT}$

$$C_{LDSTRT} = I_{LDSTRT} \times \frac{t_{LDSTRT}}{V_{LDSTRT}} = 2\mu\text{A} \times \frac{60\text{ms}}{1.2\text{V}} = 0.1\mu\text{F} \quad (25)$$

Choose closest available standard value: 0.1  $\mu$ F, 10 %.

### 9.2.2.7 Setting the Transient Overcurrent Blanking Interval ( $t_{ITIMER}$ )

For the design example under discussion, overcurrent transients are allowed for 2-ms duration. This blanking interval can be set by selecting appropriate capacitor  $C_{ITIMER}$  from ITIMER pin to ground. The value of  $C_{ITIMER}$  to set 2 ms for  $t_{ITIMER}$  can be calculated using [公式 26](#).

$$C_{ITIMER} (\text{nF}) = \frac{t_{ITIMER} (\text{ms})}{0.47} = 4.255 \text{ nF} \quad (26)$$

Choose closest available standard value: 4.7 nF, 10 %.

### 9.2.2.8 Setting the Auto-Retry Delay and Number of Retries

The time delay between retries can be programmed by selecting capacitor  $C_{RETRY\_DLY}$  on RETRY\_DLY pin. The value of  $C_{RETRY\_DLY}$  to set a 100-ms auto-retry delay can be calculated using [公式 27](#).

$$C_{RETRY\_DLY} (\text{pF}) = \frac{t_{RETRY\_DLY} (\mu\text{s})}{46.83} - 4 \text{ pF} = 2131.38 \text{ pF} \quad (27)$$

Choose closest available standard value: 2.2 nF, 10 %.

The number of auto-retry attempts can be set by a capacitor  $C_{NRETRY}$  on the NRETRY pin using [公式 28](#)

$$N_{RETRY} = \frac{4 \times C_{NRETRY} (\text{pF})}{C_{RETRY\_DLY} (\text{pF}) + 4 \text{ pF}} \quad (28)$$

For this design example, the requirement is to retry 4 times after the device shuts down due to a fault. Since, the number of auto-retries can be adjusted in discrete steps as explained in [Fault Response](#), choose  $C_{NRETRY}$  such that  $N_{RETRY}$  is less than 4. Use [公式 29](#) to calculate  $C_{NRETRY}$ .

$$C_{NRETRY} (\text{pF}) < \frac{N_{RETRY} \times (C_{RETRY\_DLY} (\text{pF}) + 4 \text{ pF})}{4} < 2204 \text{ pF} \quad (29)$$

Choose closest available standard value: 2.2 nF, 10 %.

9.2.3 Application Curves

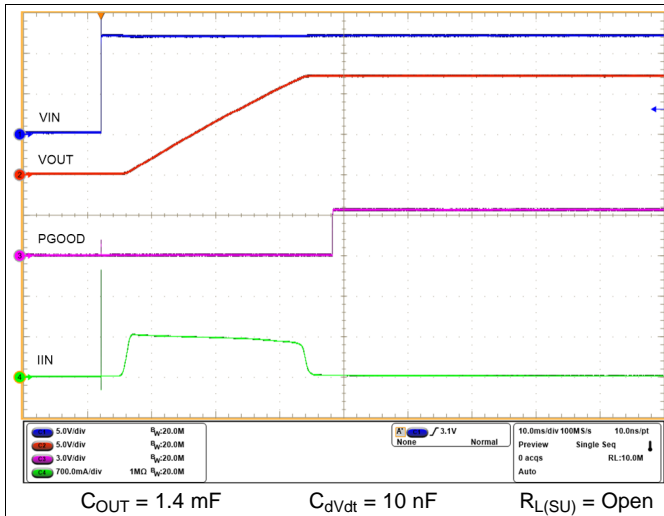


图 54. Hot-Plug Start-Up Without Load on Output - dVdt Limited

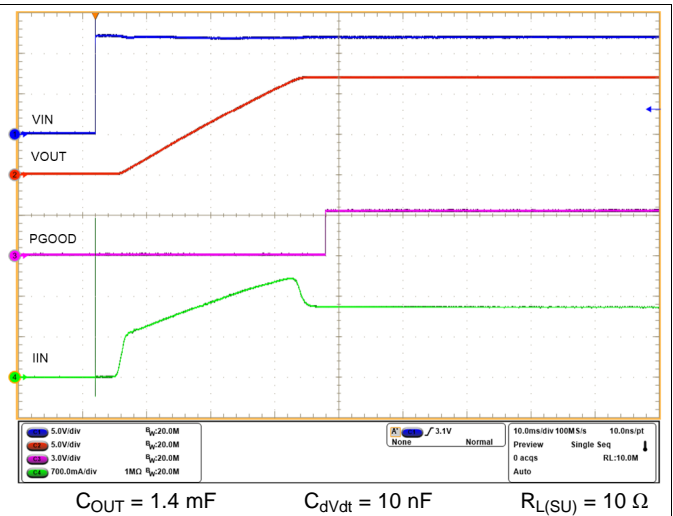


图 55. Hot-Plug Start-Up With Load on Output - dVdt Limited

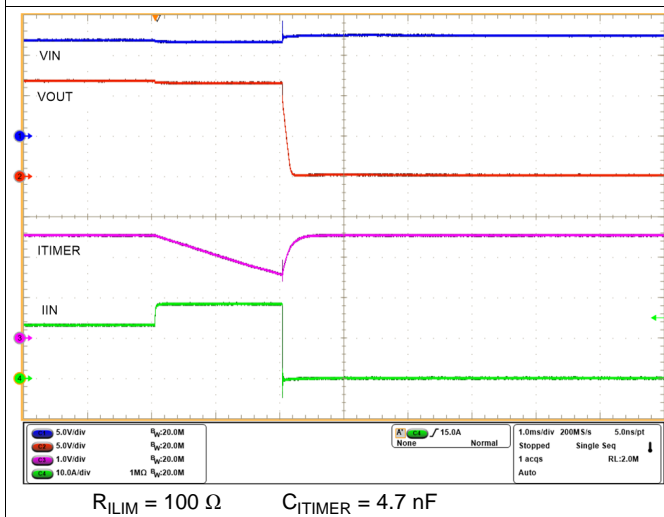


图 56. Circuit Breaker With Transient Overcurrent Blanking Interval of 2 ms



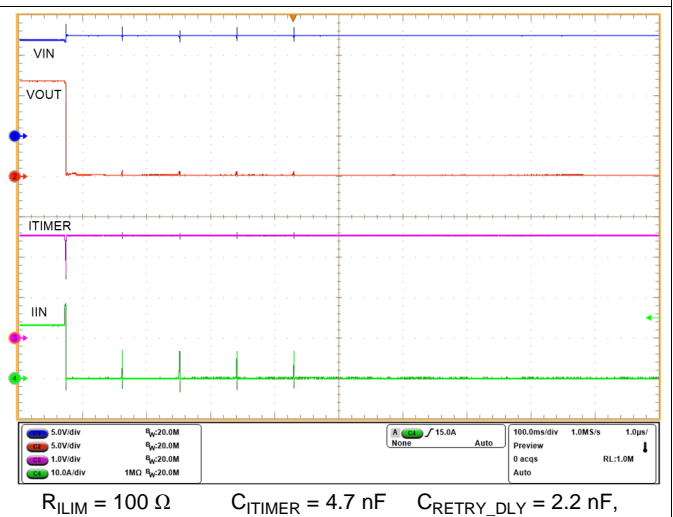


图 57. Circuit Breaker - Auto-Retry 4 Times With Retry Delay of 100 ms

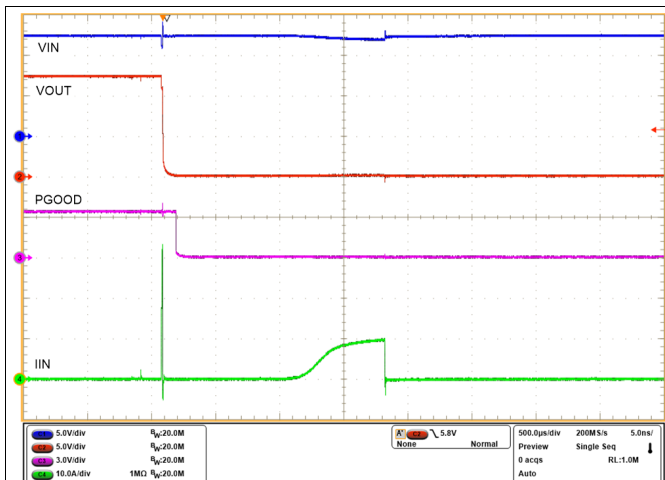

$R_{LIM} = 100 \Omega$

图 58. Output Hard Short-Circuit While ON

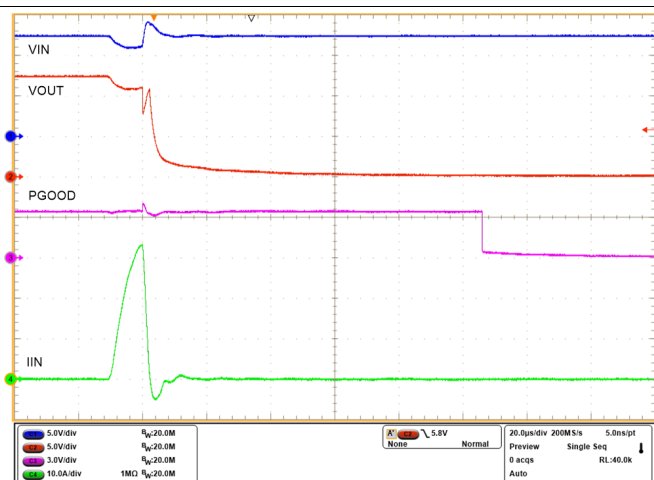

$R_{LIM} = 100 \Omega$

图 59. Output Hard Short-Circuit While ON (Zoomed In)

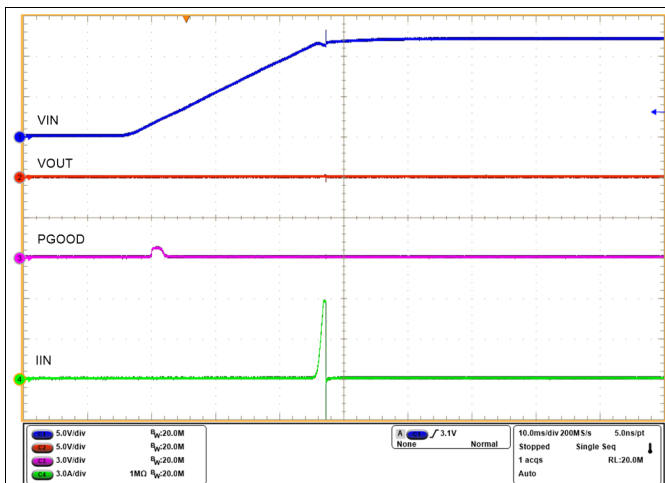


图 60. Power-Up With Short-Circuit on Output



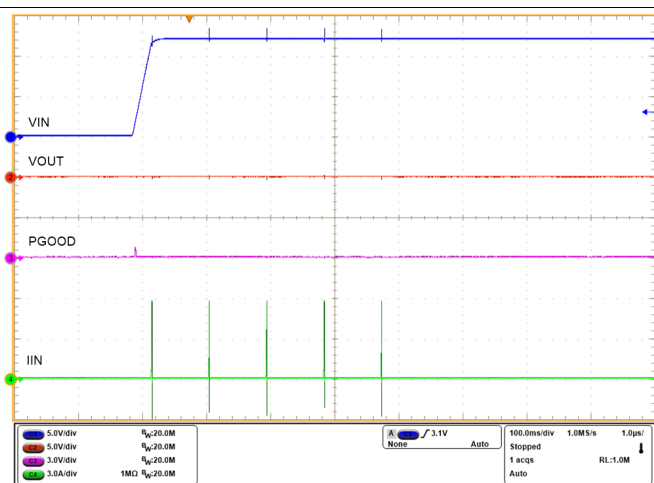


图 61. Power-Up With Short-Circuit on Output - Auto-Retry 4 Times With Retry Delay of 100 ms

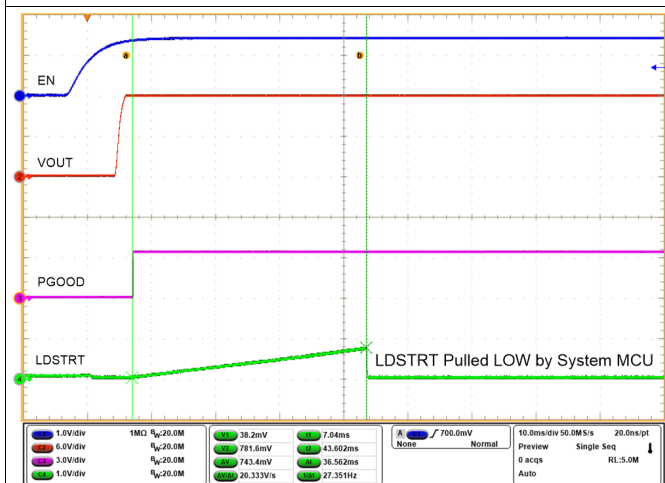

$C_{LDSTRT} = 0.1 \mu F$

图 62. Successful Load Handshake (LDSTRT)

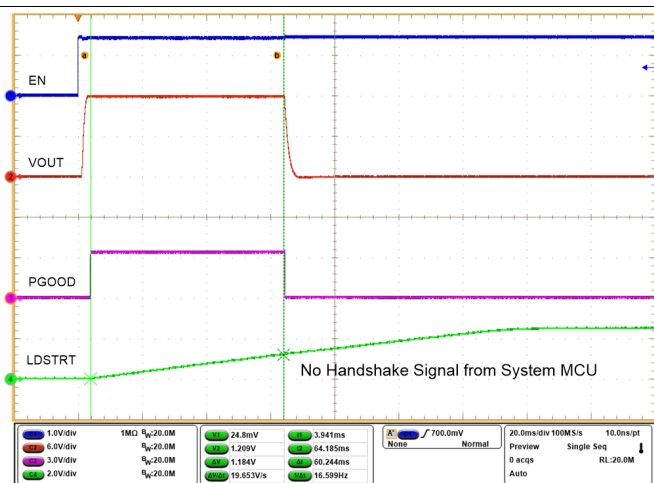

$C_{LDSTRT} = 0.1 \mu F$


图 63. Unsuccessful Load Handshake (LDSTRT)

## 9.3 System Examples

### 9.3.1 Optical Module Power Rail Path Protection

Optical modules are commonly used in high-bandwidth data communication systems such as Optical Networking equipment, Enterprise/Data-Center Switches and Routers. Several variants of optical modules are available in the market, which differ in the form-factor and the data speed support (Gbit/s). Of these, the popular variant Double Dense Quad Small Form-factor Pluggable (QSFP-DD) module supports speeds up to 400 Gbit/s. In addition to the system protection during hot-plug events, the other key requirement for optical module is the tight voltage regulation. The optical module uses 3.3 V supply and requires voltage regulation within  $\pm 5\%$  for proper operation.

A typical power tree of such system is shown in [图 64](#). The optical line card consists of DC-DC converter, protection device (eFuse) and power supply filters. The DC-DC converter steps-down the 12 V to 3.3 V and maintains the 3.3 V rail within  $\pm 2\%$ . The power supply filtering network uses 'LC' components to reduce high frequency noise injection into the optical module. The DC resistance of the inductor 'L' causes voltage drop of around 1.5 % which leaves us with a voltage drop budget of just 1.5 % ( $3.3\text{ V} * 1.5\% = 50\text{ mV}$ ) across the protection device. Considering a maximum load current of 5.5 A per module, the maximum ON-resistance of the protection device should be less than 9 m $\Omega$ . TPS25982 eFuse offers ultra-low ON-resistance of 2.7 m $\Omega$  (typical) and 4.5 m $\Omega$  (maximum, across temperature), thereby meeting the target specification with additional margin to spare and simplifying the overall system design.

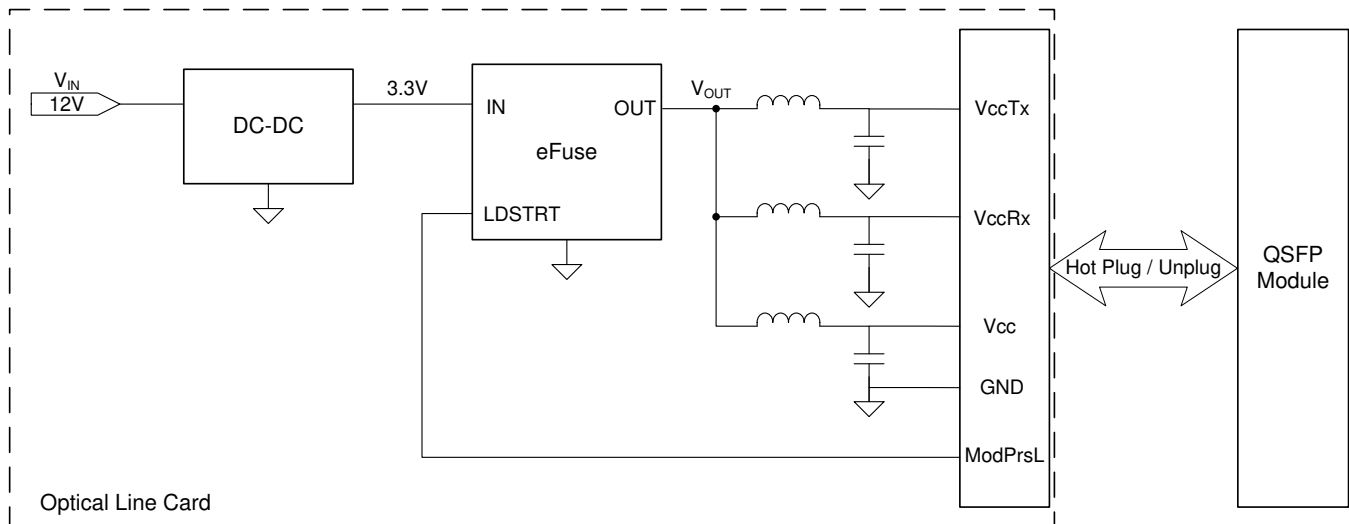

**图 64. Power Tree Block Diagram of a Typical Optical Line Card**

As shown in [图 64](#), ModPrsL signal acts as a handshake signal between the line card and the optical module. ModPrsL is always pulled to ground inside the module. When the module is hot-plugged into the host "Optical Line Card" connector, the ModPrsL signal pulls down the LDSTRT pin and enables the TPS25982 eFuse to power the module. This ensures that power is applied on the port only when a module is plugged in and disconnected when there is no module present.

## System Examples (接下页)

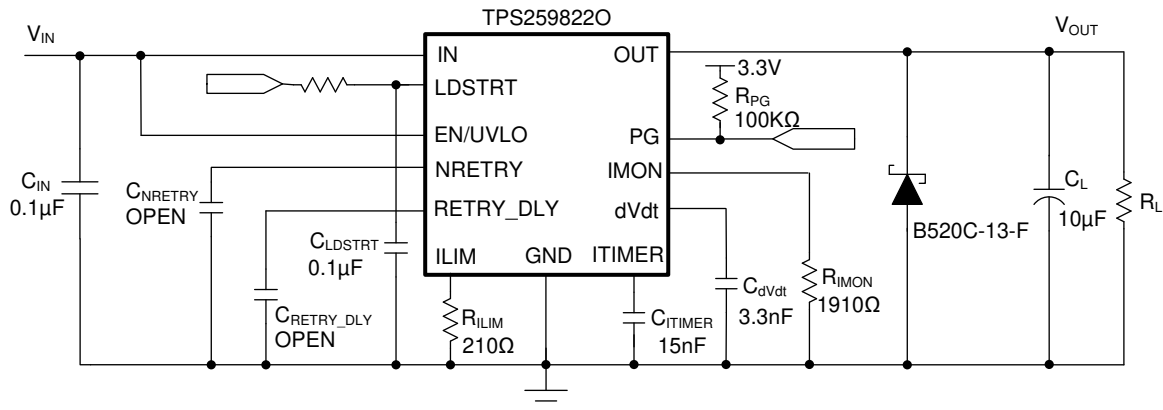


图 65. TPS2598220 Configured for a 3.3-V Power Rail Path Protection in Optical Module

### 9.3.1.1 Design Requirements

表 9 shows the design parameters for this example.

表 9. Design Parameters

| DESIGN PARAMETER   | EXAMPLE VALUE |
|--|---------------|
| Input voltage, $V_{IN}$                                  | 3.3 V         |
| Oversvoltage lockout, $V_{OVP}$                          | 3.7 V         |
| Maximum voltage drop in the path                         | ± 5 %         |
| Maximum load current, $I_{OUT}$                          | 5.5 A         |
| Current limit, $I_{LIM}$                                 | 7 A           |
| Transient overcurrent blanking interval ( $t_{ITIMER}$ ) | 6 ms          |
| Load capacitance, $C_{OUT}$                              | 10 µF         |
| Maximum ambient temperature, $T_A$                       | 85 °C         |
| Module present detection, ModPrsL                        | Yes           |
| Retry delay, $t_{RETRY\_DLY}$                            | 200 µs        |
| No. of retries, $N_{RETRY}$                              | 4             |

### 9.3.1.2 Device Selection

Optical modules are very sensitive to supply voltage variations and thus require input oversvoltage protection. TPS2598220 variant from TPS25982 family is selected to set oversvoltage protection at 3.7 V. TPS2598220 allows overcurrents for a user specified blanking interval  $t_{ITIMER}$  before breaking the circuit path. In this use case,  $t_{ITIMER}$  is set for 6 ms interval.

### 9.3.1.3 External Component Settings

By following similar design procedure as outlined in [Detailed Design Procedure](#), the external component values are calculated as below

- $R_{ILIM} = 210 \Omega$  to set 7-A current limit
- $C_{ITIMER} = 15 \text{ nF}$  to set fault blanking time of 6 ms
- $R_{IMON} = 1910 \Omega$  to set maximum IMON pin voltage  $V_{IMON}$  within ADC range of 3.3 V
- $C_{dVdt}$  capacitance is chosen as 3.3 nF
- Leave RETRY\_DLY and NRETRY pins OPEN to set minimum auto-retry delay of 200 µs and number of retries to 4



### 9.3.1.4 Voltage Drop

表 10 shows the power path voltage drop (%) due to the eFuse in QSFP modules of different power classes.

表 10. Voltage Drop across TPS25982 on QSFP Module Power Rail

| POWER CLASS | MAXIMUM POWER CONSUMPTION PER MODULE (W) | MAXIMUM LOAD CURRENT (A) | TYPICAL VOLTAGE DROP (%) |
|-------------|--|--------------------------|--------------------------|
| 1           | 1.5                                      | 0.454                    | 0.037                    |
| 2           | 3.5                                      | 1.06                     | 0.087                    |
| 3           | 7  | 2.12                     | 0.174                    |
| 4           | 8  | 2.42                     | 0.2                      |
| 5           | 10                                       | 3.03                     | 0.248                    |
| 6           | 12                                       | 3.63                     | 0.3                      |
| 7           | 14                                       | 4.24                     | 0.347                    |
| 8           | 18                                       | 5.45                     | 0.446                    |

### 9.3.1.5 Application Curves

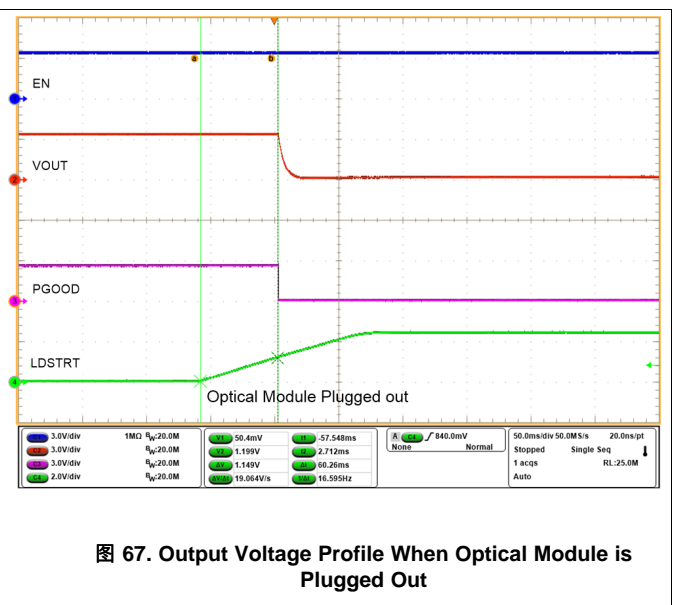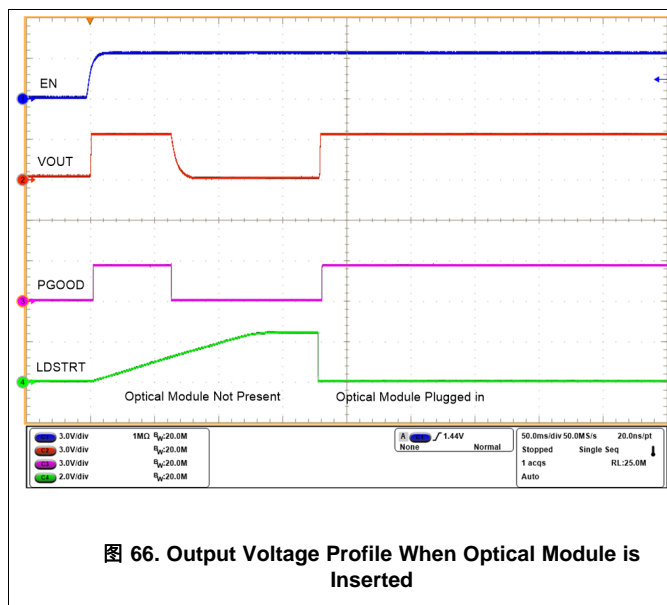



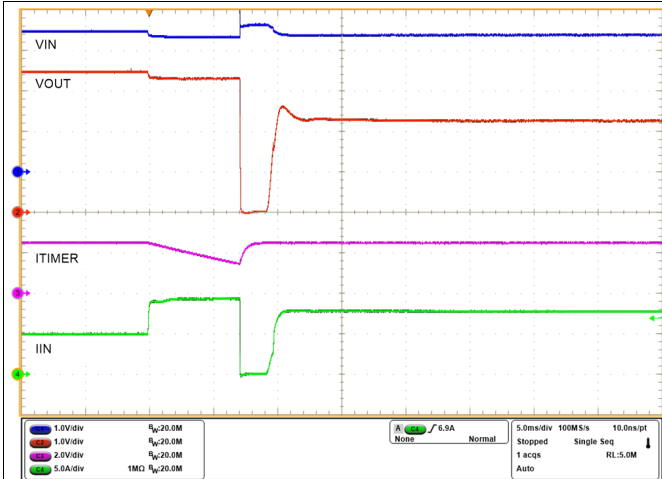


图 68. Circuit Breaker With Transient Overcurrent Blanking Interval of 6 ms; Device Restarts in Current Limit Mode

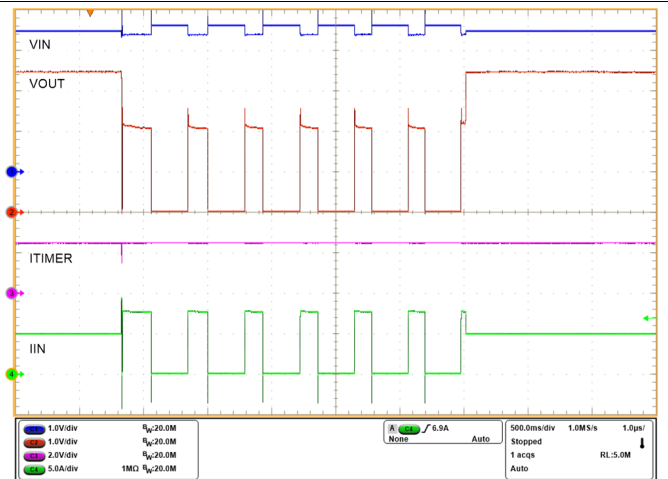


图 69. Overload Response and Recovery

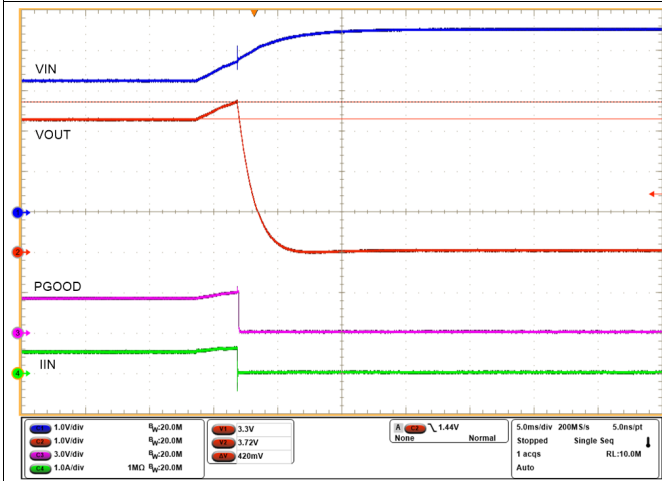


图 70. Overvoltage Cut-off at 3.7 V with TPS2598220 Device

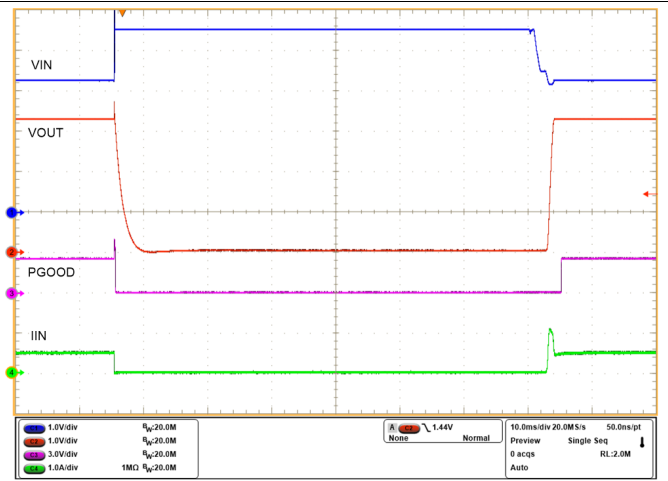


图 71. Overvoltage Protection Response and Recovery with TPS2598220 Device

### 9.3.2 Input Protection for 12-V Rail Applications: PCIe Cards, Storage Interfaces and DC Fans

TPS25982 eFuse provides inrush current management and also protects the system from most common faults such as undervoltage, overvoltage and overcurrents. The combination of high current support along with low ON-resistance makes TPS25982 eFuse an ideal protection solution for PCIe cards, Storage Interfaces and DC Fan loads. The external component values can be calculated by following the design procedure outlined in [Detailed Design Procedure](#). Alternatively, a spreadsheet design tool [TPS25982xx Design Calculator](#) is available for simplified design efforts.

## 10 Power Supply Recommendations

The TPS25982 devices are designed for a supply voltage range of  $2.7\text{ V} \leq V_{IN} \leq 24\text{ V}$ . TI recommends an input ceramic bypass capacitor higher than  $0.1\text{ }\mu\text{F}$  if the input supply is located more than a few inches from the device. The power supply must be rated higher than the set current limit to avoid voltage droops during overcurrent and short-circuit conditions.

### 10.1 Transient Protection

In the case of a short circuit and overload current limit when the device interrupts current flow, the input inductance generates a positive voltage spike on the input, and the output inductance generates a negative voltage spike on the output. The peak amplitude of voltage spikes (transients) is dependent on the value of inductance in series to the input or output of the device. Such transients can exceed the absolute maximum ratings of the device if steps are not taken to address the issue. Typical methods for addressing transients include:

- Minimize lead length and inductance into and out of the device.
- Use a large PCB GND plane.
- Use a Schottky diode across the output to absorb negative spikes.
- Use a low value ceramic capacitor  $C_{IN} = 0.001\text{ }\mu\text{F}$  to  $0.1\text{ }\mu\text{F}$  to absorb the energy and dampen the transients. The approximate value of input capacitance can be estimated using [公式 30](#).


$$V_{\text{SPIKE(Absolute)}} = V_{IN} + I_{\text{LOAD}} \times \sqrt{\frac{L_{IN}}{C_{IN}}}$$

where

- $V_{IN}$  is the nominal supply voltage
- $I_{\text{LOAD}}$  is the load current
- $L_{IN}$  equals the effective inductance seen looking into the source
- $C_{IN}$  is the capacitance present at the input

(30)

Some of the applications may require the addition of a Transient Voltage Suppressor (TVS) to prevent transients from exceeding the absolute maximum ratings of the device. A typical circuit implementation with optional protection components (a ceramic capacitor, TVS and Schottky diode) is shown in [图 72](#).

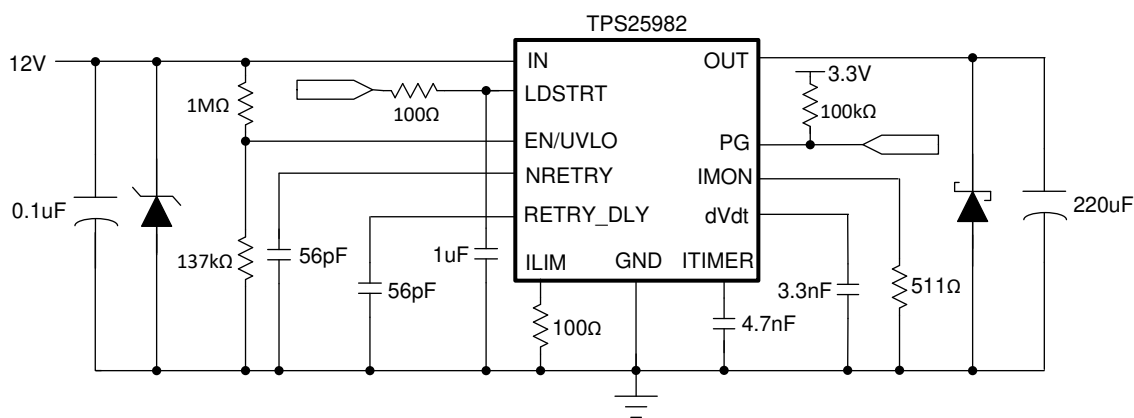

**图 72. Typical Circuit Implementation With Optional Protection Components**

## 10.2 Output Short-Circuit Measurements

It is difficult to obtain repeatable and similar short-circuit testing results. The following contribute to variation in results:

- Source bypassing
- Input leads
- Board layout
- Component selection
- Output shorting method
- Relative location of the short
- Instrumentation

The actual short exhibits a certain degree of randomness because it microscopically bounces and arcs. Ensure that configuration and methods are used to obtain realistic results.

---

### 注

Do not expect to see waveforms exactly like the waveforms in this data sheet because every setup is different.


---

## 11 Layout

### 11.1 Layout Guidelines

- The IN Exposed Thermal Pad is used for Heat Dissipation. Connect to as much copper area as possible using an array of thermal vias. The via array also helps to minimize the voltage gradient across the VIN pad and facilitates uniform current distribution through the internal FET, which improves the current sensing and monitoring accuracy.
- For all applications, TI recommends a ceramic decoupling capacitor of 0.01  $\mu\text{F}$  or greater between IN and GND terminals. For hot-plug applications, where input power-path inductance is negligible, this capacitor can be eliminated or minimized.
- The optimal placement of the decoupling capacitor is closest to the IN and GND terminals of the device. Care must be taken to minimize the loop area formed by the bypass-capacitor connection, the IN terminal, and the GND terminal of the IC.
- High current carrying power path connections must be as short as possible and must be sized to carry at least twice the full-load current. It is recommended to use a minimum trace width of 50 mil for the OUT power connection.
- The GND terminal is the reference for all internal signals and must be isolated from any bounce due to large switching currents in the system power ground plane. It is recommended to connect the device GND to a signal ground island on the board, which in turn is connected to the system power GND plane at one point.
- Locate the support components for the following signals close to their respective connection pins - ILIM, IMON, ITIMER, RETRY\_DLY, NRETRY and dVdT with the shortest possible trace routing to reduce parasitic effects on the respective associated functions. These traces must not have any coupling to switching signals on the board.
- The ILIM pin is highly sensitive to capacitance and TI recommends to pay special attention to the layout to maintain the parasitic capacitance below 30 pF for stable operation.
- Use short traces on the RETRY\_DLY and NRETRY pins to ensure the auto-retry timer delay and number of auto-retries is not altered by the additional parasitic capacitance on these pins.
- Protection devices such as TVS, snubbers, capacitors, or diodes must be placed physically close to the device they are intended to protect. These protection devices must be routed with short traces to reduce inductance. For example, TI recommends a protection Schottky diode to address negative transients due to switching of inductive loads, and it must be physically close to the OUT pins.
- Use proper layout and thermal management techniques to ensure there is no significant steady state thermal gradient between the two thermal pads on the IC. This is necessary for proper functioning of the device overtemperature protection mechanism and successful startup under all conditions.
- Obtaining acceptable performance with alternate layout schemes is possible; the [Layout Example](#) is intended as a guideline and shown to produce good results from electrical and thermal standpoint.

## 11.2 Layout Example

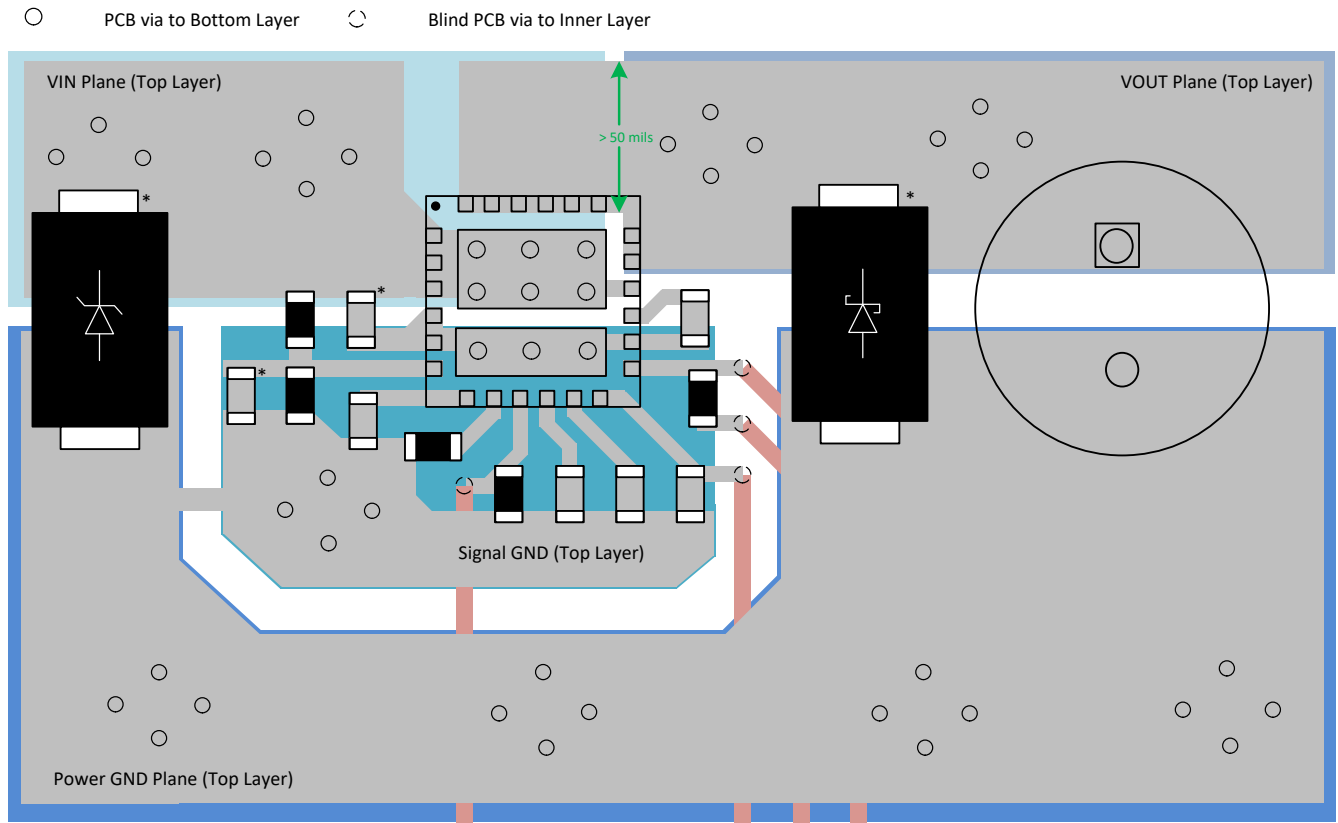

\* Optional components for suppressing transients induced while switching current through inductive elements at input/output

图 73. TPS25982 Example PCB Layout

## 12 器件和文档支持

### 12.1 文档支持

#### 12.1.1 相关文档

请参阅如下相关文档：

- 《TPS259824OEVMM 电子保险丝评估板》
- 《TPS259827LEVMM 电子保险丝评估板》
- 《TPS25982xx 设计计算器》

#### 12.1.1.1 相关链接

下表列出了快速访问链接。类别包括技术文档、支持和社区资源、工具和软件，以及立即订购快速访问。

表 11. 相关链接

| 器件         | 产品文件夹                | 立即订购                 | 技术文档                 | 工具和软件                | 支持和社区                |
|------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| TPS259822L | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TPS259823L | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TPS259824L | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TPS259827L | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TPS259822O | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TPS259823O | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TPS259824O | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TPS259827O | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |

### 12.2 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com.cn](http://ti.com.cn) 上的器件产品文件夹。单击右上角的通知我进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.3 社区资源

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 12.4 商标

E2E is a trademark of Texas Instruments.

### 12.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 12.6 Glossary

[SLYZ022](#) — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请查阅左侧的导航栏。

## 重要声明和免责声明

TI 均以“原样”提供技术性及其可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及ti.com.cn上或随附TI产品提供的其他可适用条款的约束。TI提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2020 德州仪器半导体技术（上海）有限公司

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS259822LNRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>22LN          | <a href="#">Samples</a> |
| TPS259822LNRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>22LN          | <a href="#">Samples</a> |
| TPS259822ONRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>22ON          | <a href="#">Samples</a> |
| TPS259822ONRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>22ON          | <a href="#">Samples</a> |
| TPS259823LNRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>23LN          | <a href="#">Samples</a> |
| TPS259823LNRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>23LN          | <a href="#">Samples</a> |
| TPS259823ONRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>23ON          | <a href="#">Samples</a> |
| TPS259823ONRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>23ON          | <a href="#">Samples</a> |
| TPS259824LNRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>24LN          | <a href="#">Samples</a> |
| TPS259824LNRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>24LN          | <a href="#">Samples</a> |
| TPS259824ONRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>24ON          | <a href="#">Samples</a> |
| TPS259824ONRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>24ON          | <a href="#">Samples</a> |
| TPS259827LNRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>27LN          | <a href="#">Samples</a> |
| TPS259827LNRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>27LN          | <a href="#">Samples</a> |
| TPS259827ONRGER  | ACTIVE        | VQFN         | RGE             | 24   | 3000        | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>27ON          | <a href="#">Samples</a> |
| TPS259827ONRGET  | ACTIVE        | VQFN         | RGE             | 24   | 250         | RoHS & Green    | NIPDAUAG                             | Level-2-260C-1 YEAR  | -40 to 125   | TP2598<br>27ON          | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:



---

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS259822LNRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259822LNRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259822ONRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259822ONRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259823LNRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259823LNRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259823ONRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259823ONRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259824LNRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259824LNRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259824ONRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259824ONRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259827LNRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259827LNRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259827ONRGER | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |
| TPS259827ONRGET | VQFN         | RGE             | 24   | 250  | 180.0              | 12.5               | 4.35    | 4.35    | 1.1     | 8.0     | 12.0   | Q2            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal


| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS259822LNRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259822LNRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |
| TPS259822ONRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259822ONRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |
| TPS259823LNRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259823LNRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |
| TPS259823ONRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259823ONRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |
| TPS259824LNRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259824LNRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |
| TPS259824ONRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259824ONRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |
| TPS259827LNRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259827LNRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |
| TPS259827ONRGER | VQFN         | RGE             | 24   | 3000 | 338.0       | 355.0      | 50.0        |
| TPS259827ONRGET | VQFN         | RGE             | 24   | 250  | 205.0       | 200.0      | 33.0        |

**RGE 24**

**GENERIC PACKAGE VIEW**

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

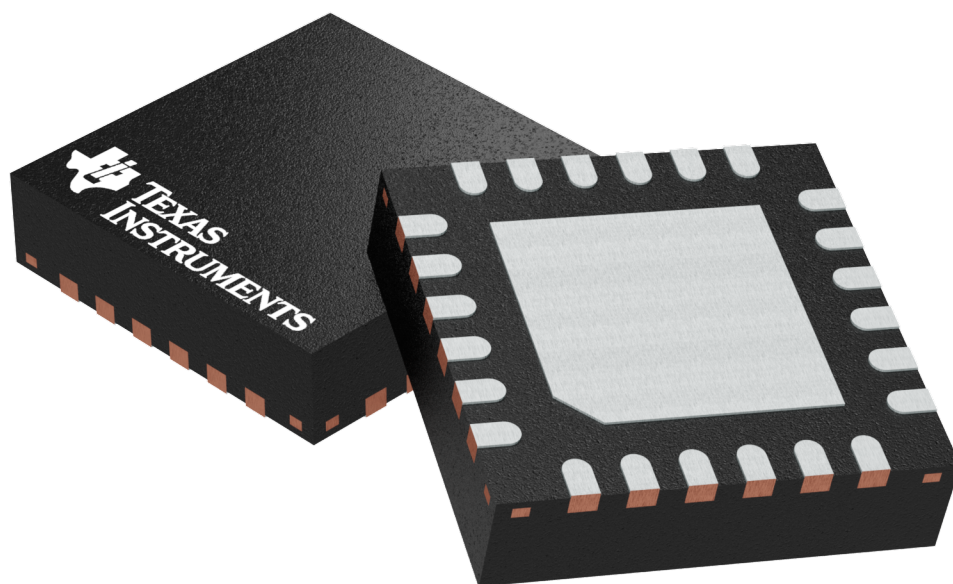

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4204104/H




# EXAMPLE BOARD LAYOUT


RGE0024M

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

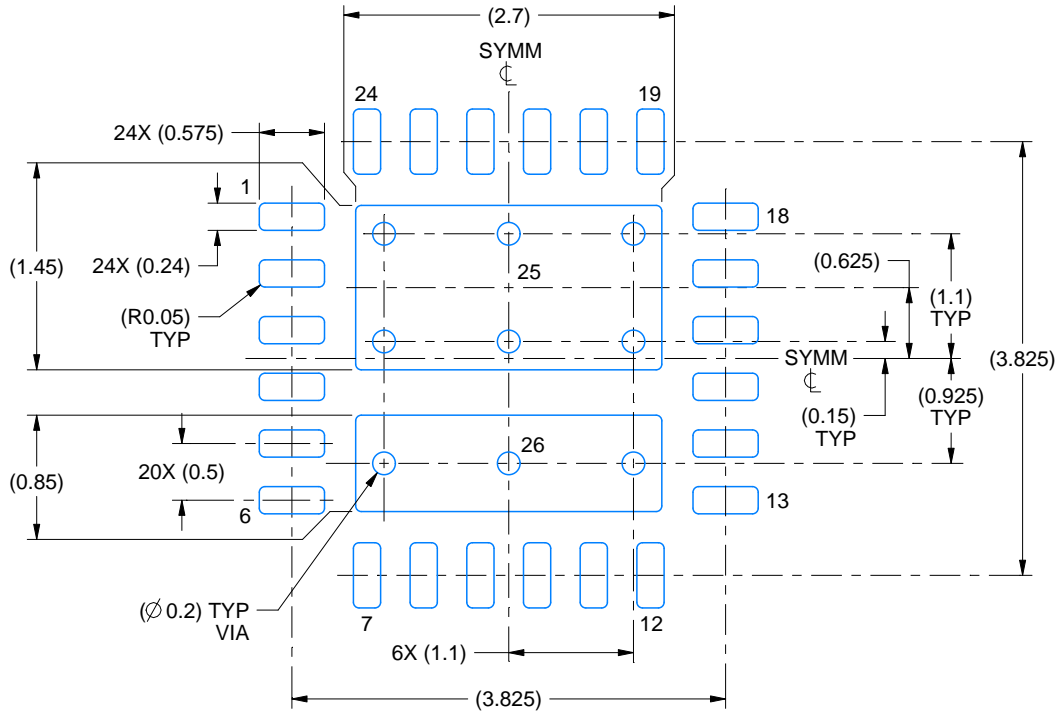

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

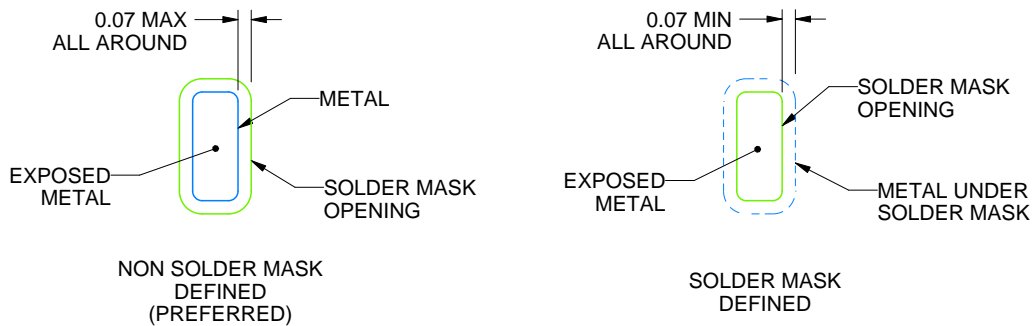

SOLDER MASK DETAILS

4223975/B 03/2018

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RGE0024M

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

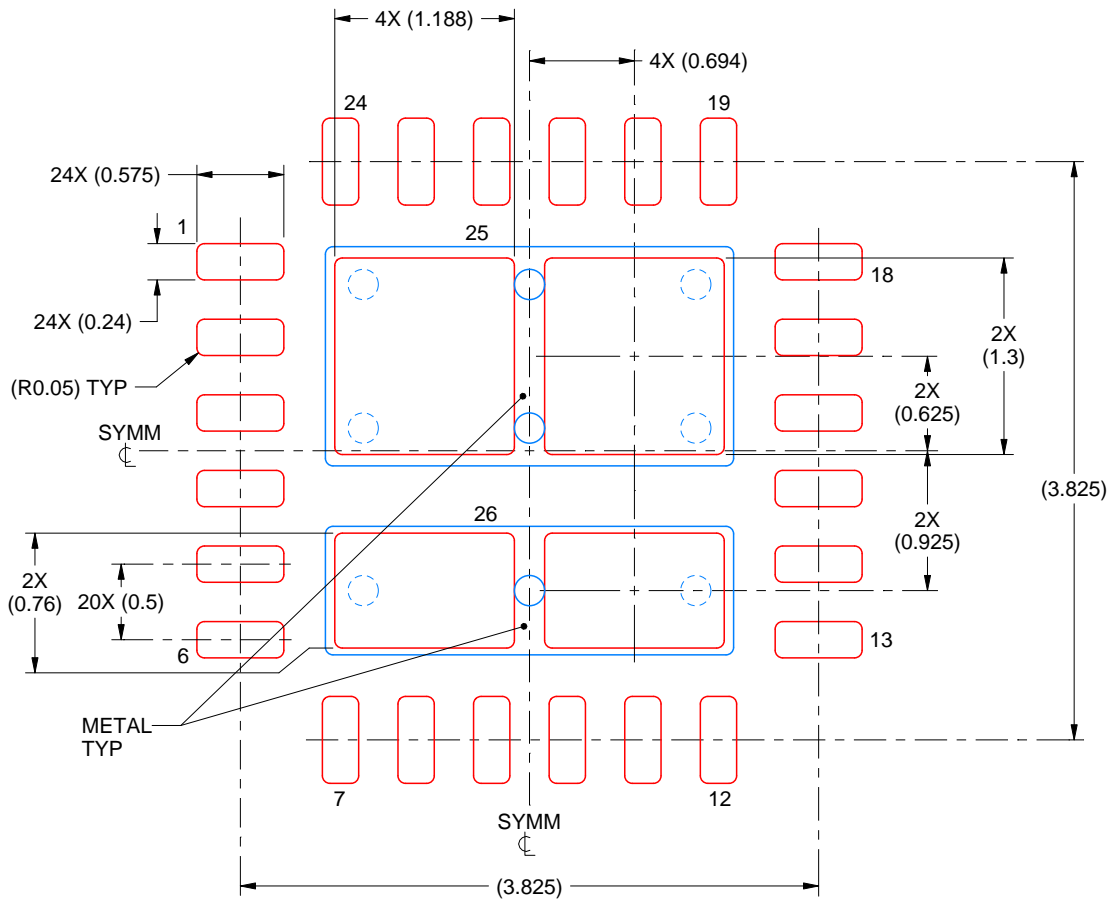

**SOLDER PASTE EXAMPLE**  
 BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 25  
 78% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
 SCALE:20X

4223975/B 03/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122

Copyright © 2020 德州仪器半导体技术（上海）有限公司



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Hot Swap Voltage Controllers](#) category:*

*Click to view products by [Texas Instruments](#) manufacturer:*

Other Similar products are found below :

[LT4256-1CS8#TRPBF](#) [HIP1011BCBZA](#) [ISL6119HIBZA](#) [ISL6141IBZA](#) [ISL6151CBZA-T](#) [ISL61851ACBZ](#) [ISL61851BCBZ](#)  
[ISL61851BIBZ-T](#) [ISL61851CCBZ](#) [ISL61851DCBZ](#) [ISL61851GCBZ](#) [ISL61851HCBZ](#) [ISL61851ICBZ](#) [ISL61851KCBZ](#) [TPS25961DRVR](#)  
[TPS26612DDFR](#) [LM74700MDDFREP](#) [TPS23880RTQR](#) [MP5991GLU-Z](#) [MP5048GU-Z](#) [TPS259822LNRGER](#) [TPS259461ARPWR](#)  
[TPS16530RGER](#) [LT4256-3IGN#TRPBF](#) [LT1641IS8#TRPBF](#) [LTC4218IGN#TRPBF](#) [LTC4210-1CS6#TRPBF](#) [LTC4211IMS8#TRPBF](#)  
[RT1720GF](#) [TPS259827ONRGER](#) [TPS259823ONRGER](#) [LM74502QDDFRQ1](#) [LM5068MMX-2/NOPB](#) [LM74502HQDDFRQ1](#)  
[TPS25210LRPWR](#) [TPS26601RHFR](#) [TPS26611DDFR](#) [TPS259472ARPWR](#) [LM74500QDDFRQ1](#) [TPS26610DDFR](#) [TPS259460ARPWR](#)  
[LM5066IPMHX/NOPB](#) [TPS259824LNRGER](#) [TPS259823LNRGER](#) [NU6-II 60kA/385V 4P](#) [NU6-G 40kA/275V 4P](#) [NU6-II 40kA/385V 2P](#)  
[TPS26635RGER](#) [AL6-NFNFBW-9](#) [AL-ECF504-AA24](#)