



SPECIFICATION of LD-MC-0905P

No.	Item	Unit	Specification	Condition
1	Directivity		Omnidirectional	
2	Sensiivity	dB	-42±3dB	F=1KHz 0dB=1V/Pa
3	Standard operating voltage	V	3V	
4	Output impedance	Ω	2.2K	F=1KHz 1Pa
5	Max. operating voltage	V	10	
6	Sensitivity reduction	dB	-3	At 1.5V to 3.0V
7	Frequency	Hz	50~16000Hz	
8	Max.current consumption	mA	0.5	
9	Signal to noise ration	dB	60	F=1KHz 1Pa A weighted
10	Storage temp	°C	-20°C~+60°C	
11	Dimension	mm	Φ9.7×5.0	See appearance drawing
12	Material		AL	
13	Terminal		Pin Type	See appearance drawing

TYPICAL FREQUENCY RESPONSE CURVE

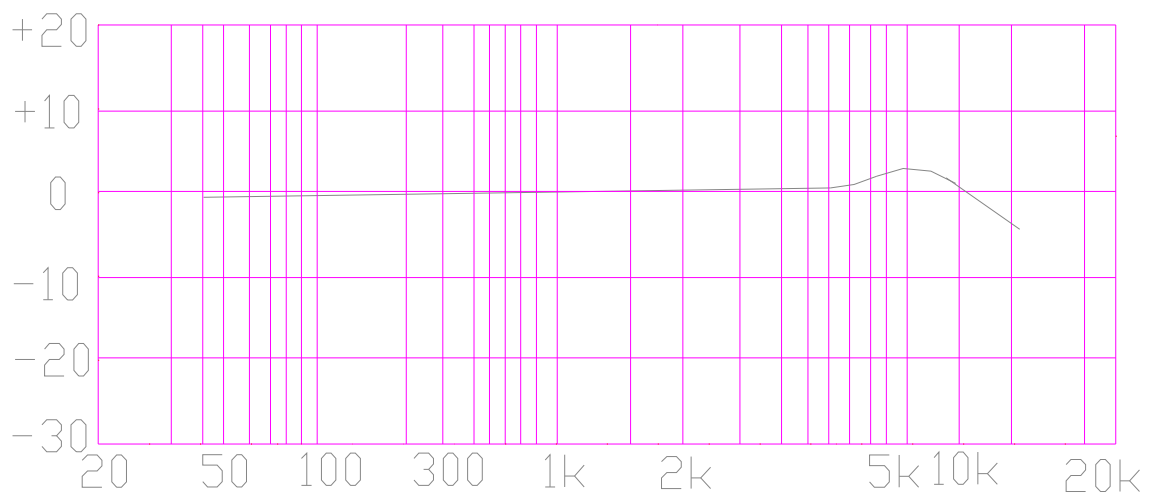


APPEARANCE DRAWING&MEASUREMENT CIRCUIT

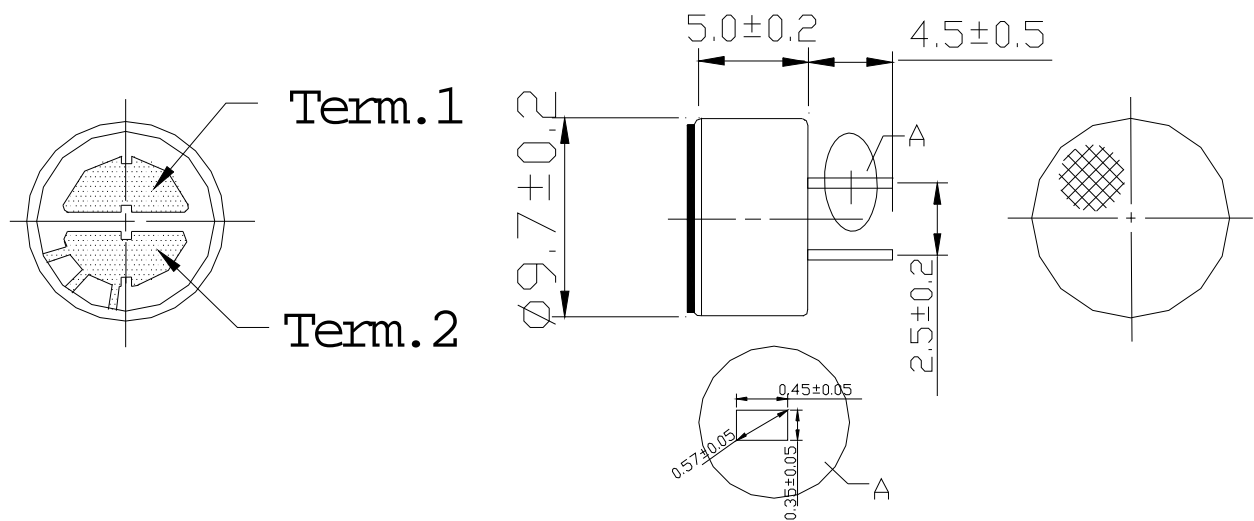

MECHANICAL CHARACTERISTICS

NO.	item	Test condition	Evaluation standard
1	Soldering Heat Resistance	Soldering iron of $+330\pm5^{\circ}\text{C}$ should be placed on the terminal for 2 ± 0.5 seconds.	No interference in operation
2	Vibration Test	The part shall be measured after being applied vibration of amplitude of 1.5mm with 10to 55hz band of vibration frequency to each of 3per-pendicular directions for 2hours.	After any tests, the sensitivity to be within $\pm 3\text{dB}$.
3	Drop Test	The microphone unit without packaged must be subjected to each 3 drops at three axes from the height of 1 meter to 20mm thick wooden board.	

ENVIRONMENTAL TEST

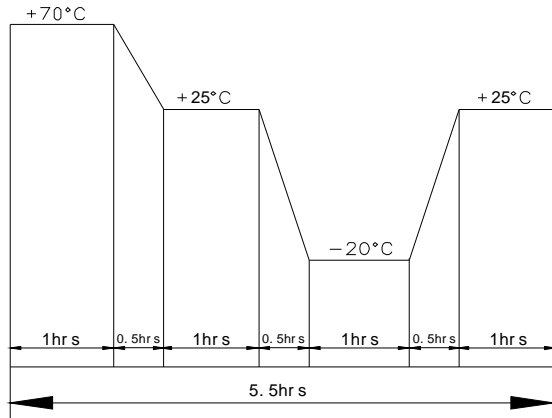NO.	Item	Test conditions	Evaluation standard
1	High temp.test	After being placed in a chamber at $+70^{\circ}\text{C}$ for 72 hours.	After any tests, the sensitivity to be within $\pm 3\text{dB}$ of intial sensitivity after 6 hours of conditioning at $+25^{\circ}\text{C}$
2	Low temp. test	After being placed in a chamber at -25°C for 72 hours.	
3	Humidity test	After being placed in a chamber at $+60^{\circ}\text{C}$ and $90\pm 5\%$ relative humidity for 240 hours.	
4	Temp.cycle test	<p>The part shall be subjected to 10 cycles.One cycle shall be consist of:</p> 	

TEST CONDITION.

Standard Test Condition: a)Temperature: $+5\sim +35^{\circ}\text{C}$ b)Humidity:45-85% c)Pressure:860-1060mbar

Judement Test Condition: a)Temperature: $+25\pm 5^{\circ}\text{C}$ b)Humidity:60-70% c)Pressure:860-1060mbar

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Microphones](#) category:

Click to view products by [Loudity](#) manufacturer:

Other Similar products are found below :

[BCM4013OLFC-42-JST-ZHR-2](#) [TO38-30702-B20](#) [FG-23329-P142](#) [254-ECM6441-RO](#) [AOM-6742P-2-R](#) [SPM04C-38/1186-T/R](#) [POM-2244L-C33-R](#) [AOM-6545P-R](#) [ANM-5254L-R](#) [AOM-6738L-R](#) [AOM-6738P-R](#) [AOM-4546P-R](#) [BCM4013OSBC-42 LF](#) [ANM-5254L-LW100-R](#) [PUM-3046L-R](#) [TOM-1545L-R](#) [POM-2738L-LW100-R](#) [POM-2738P-C33-R](#) [POM-3542P-R](#) [POM-3535L-3-LW100-R](#) [POW-2742P-C3310-B-R](#) [AOM-6742L-R](#) [AOM-6738L-LW100-R](#) [AOW-4544P-C3310-B-R](#) [POM-2735P-R](#) [PUM-5250L-C3310-R](#) [POM-5038P-C3310-R](#) [TOW-1242P-R](#) [POM-5046P-C3310-R](#) [TC-32348-000](#) [TC-32485-000](#) [BCM9745-44](#) [BCM9767P](#) [LD-MC-0905P](#) [LD-MC-6035](#) [LD-MC-9765](#) [CMC-4015-40P](#) [PMO-6022SN-42UQ](#) [PMOF-6027WN-44KDQ](#) [PMO-4015PN-42KDQ](#) [CMC-6027-42L100](#) [PMO-6027P-40KDQ](#) [PMOF-6050S-44UQ](#) [PMO-4530PN-47UQ](#) [PMO-4015MN-42HXQ](#) [CMC-6036-40T](#) [CMC-4015-25T](#) [CMC-6027-24T](#) [PMOF-9767NP-46DQ](#) [PMOF-9745W-42UQ](#)