



**3-TERMINAL 1.5A POSITIVE  
ADJUSTABLE VOLTAGE  
REGULATOR**

**FEATURES**

- \*Output current up to 1.5A
- \*Internal short circuit protection
- \*Internal over temperature protection
- \* Safe-Area compensation for output transistor
- \*Output voltage adjustable from 1.3V to 37V




LM317BT



Pin 1. Input  
2. Ground  
3. Output

LM317KT  
LM317D2TR

**BLOCK DIAGRAM**

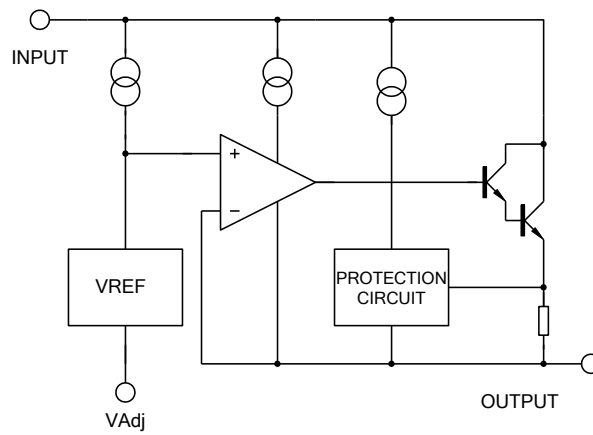

**ABSOLUTE MAXIMUM RATINGS** ( $T_a=25^\circ\text{C}$ , UNLESS OTHERWISE SPECIFIED)

PARAMETERS	SYMBOL	RATING	UNITS
Input – Output Voltage Difference	$V_i-V_o$	40	V
Lead Temperature	$T_{LEAD}$	260	$^\circ\text{C}$
Power Dissipation	$P_d$	Internal limited	—
Operating Temperature Range	$T_{OPR}$	-40 ~+125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65~+150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS**

 ( $V_i-V_o=5\text{V}$ ,  $0^\circ\text{C} < T_j < 125^\circ\text{C}$ ,  $I_o=500\text{mA}$ ,  $I_{MAX}=1.5\text{A}$ ,  $P_{MAX}=20\text{W}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Line Regulation	$\Delta V_o$	$T_a=25^\circ\text{C}$ , $3\text{V} \leq V_i-V_o \leq 40\text{V}$		0.01	0.04	%V
		$T_a=0-125^\circ\text{C}$ , $3\text{V} \leq V_i-V_o \leq 40\text{V}$		0.02	0.07	
Load Regulation	$\Delta V_o$	$T_a=25^\circ\text{C}$	$V_o \leq 5\text{V}$	18	25	mV
		$10\text{mA} \leq I_o \leq I_{MAX}$	$V_o \geq 5\text{V}$	0.4	0.5	%V <sub>O</sub>
		$10\text{mA} \leq I_o \leq I_{MAX}$	$V_o \leq 5\text{V}$	40	70	mV
		$T_a=0-125^\circ\text{C}$	$V_o \geq 5\text{V}$	0.8	1.5	%V <sub>O</sub>
Adjustable Pin current	$I_{ADJ}$			46	100	$\mu\text{A}$
Adjustable Pin Current Change	$\Delta I_{ADJ}$	$2.5\text{V} \leq V_i-V_o \leq 40\text{V}$ , $10\text{mA} \leq I_o \leq I_{MAX}$ , $P_d \leq P_{MAX}$		0.3	5	$\mu\text{A}$
Reference Voltage	$V_{REF}$	$3\text{V} \leq V_i-V_o \leq 40\text{V}$ , $10\text{mA} \leq I_o \leq I_{MAX}$ , $P_d \leq P_{MAX}$	1.20	1.25	1.30	V
Temperature Stability	STT			0.7		%V <sub>O</sub>
Minimum Load Current for regulation	$I_{L(MIN)}$	$V_i-V_o=40\text{V}$		3.5	10	mA
Maximum output Current	$I_{O(MAX)}$	$V_i-V_o \leq 15\text{V}$ , $P_d \leq P_{MAX}$	1.5	2.2		A
		$V_i-V_o=40\text{V}$ , $P_d \leq P_{MAX}$ , $T_a=25^\circ\text{C}$	0.15	0.4		
RMS Noise v.s. %of V <sub>out</sub>	eN	$T_a=25^\circ\text{C}$ , $10\text{Hz} \leq f \leq 10\text{kHz}$		0.003	0.01	%V <sub>O</sub>
Ripple Rejection	RR	$V_o=10\text{V}$ , $f=120\text{Hz}$ , $C_{ADJ}=0$		60		dB
		$V_o=10\text{V}$ , $f=120\text{Hz}$ , $C_{ADJ}=10\mu\text{F}$	66	75		
Long-term Stability, $T_J=T_{HIGH}$	ST	$T_a=25^\circ\text{C}$ , 1000 hr		0.3	1	%

Note: Testing with low duty pulse should be used to avoid heating effect.

TYPICAL CHARACTERISTICS PERFORMANCE

Fig.1 Load Regulation vs temperature




Fig.2 Adjustment Current vs Temperature




Fig.3 Dropout Voltage vs Input-Output Voltage Difference





Fig.4 Reference Voltage vs Temperature

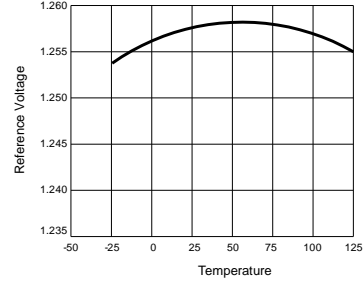

TYPICAL APPLICATION CIRCUITS




Fig.5 Programmable voltage regulator  
 $V_o = 1.25V * (1 + R2/R1) + I_{adj} * R2$   
 C1 is required when regulator is located an appreciated distance from power supply. Co is needed to improve transient response.

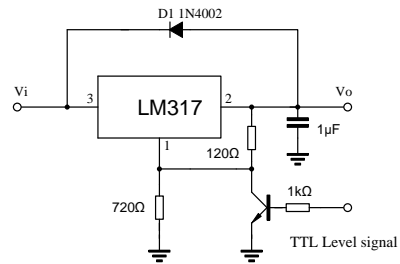


Fig.6 Regulator with On-off control


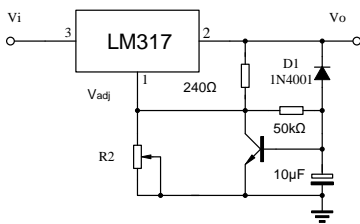


Fig.7 Soft start application

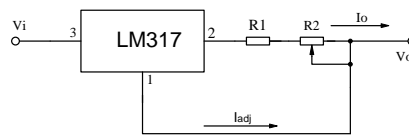

$$I_{omax} = \left( \frac{V_{ref}}{R1} \right) + I_{adj} = \frac{1.25V}{R1}$$

$$I_{omin} = \left( \frac{V_{ref}}{R1+R2} \right) + I_{adj} = \frac{1.25V}{R1+R2}$$

$$5mA < I_o < 100mA$$

Fig.8 Constant current application

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Linear Voltage Regulators](#) category:*

*Click to view products by [Tokmas](#) manufacturer:*

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA](#) [V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [WL9005D4-33](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [L78L33ACUTR](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#) [HLP2985AIM5X-5.0](#)