

XC62FP

Series

Positive Voltage Regulators



◆ CMOS Low Power Consumption

◆ Small Input-Output Voltage Differential

: 0.12V @ 100mA,
0.38V @ 200mA

◆ Maximum Output Current : 250mA (V_{OUT}=5.0V)

◆ Output Voltage Range : 2.0V~6.0V

◆ Highly Accurate : ±2% (±1%)

3

■ Applications

- Battery Powered Equipment
- Palmtops
- Portable Cameras and Video Recorders
- Reference Voltage Sources

■ General Description

The XC62FP series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The XC62FP consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series.

SOT-23 (150mW), SOT-89 (500mW) and TO-92 (300mW) packages are available.

■ Features

Maximum Output Current

: 250mA
(within max. power dissipation, V_{OUT} = 5.0V)

Output Voltage Range

: 2.0V ~ 6.0V in 0.1V increments
(1.5V ~ 1.9V for custom products)

Highly Accurate: Output voltage ±2%
(±1% for semi-custom products)

Low Power Consumption

: Typ. 2.0µA @ V_{OUT}=5.0V

Output Voltage Temperature Characteristics
: Typ. ±100ppm/°C

Input Stability : Typ. 0.2%/V


Small Input-Output Differential

: I_{OUT} = 100mA @ V_{OUT} = 5.0V with a
0.12V differential.


Ultra Small Packages

: SOT-23 (150mW) mini-mold,
SOT-89 (500mW) mini-power mold
TO-92 (300mW)


■ Typical Application Circuit

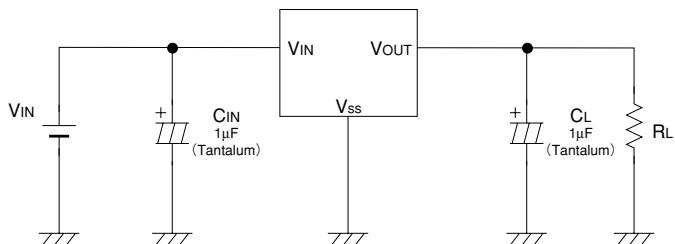

■ Typical Performance Characteristic

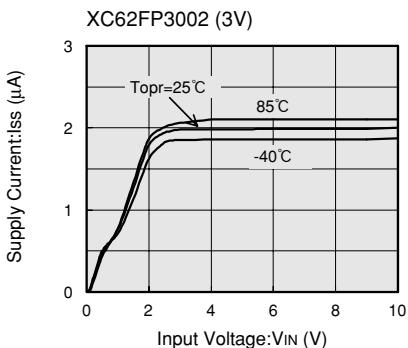

■ Pin Configuration

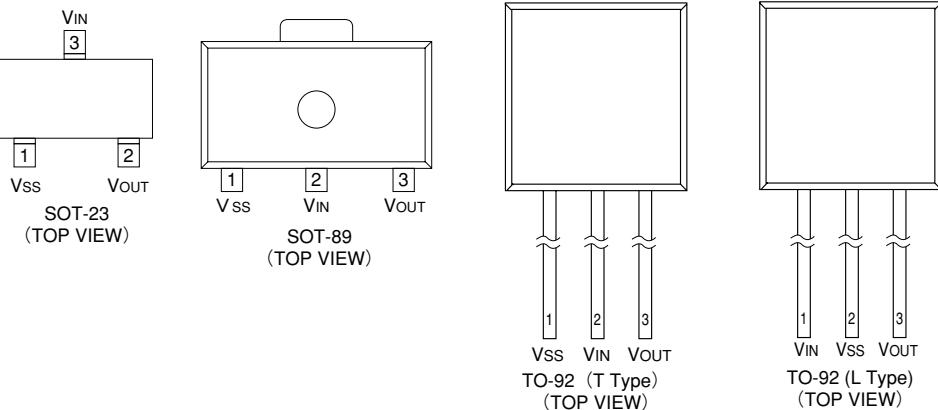

3

■ Pin Assignment

PIN NUMBER				PIN NAME	FUNCTION
SOT-23	SOT-89	TO-92 (T)	TO-92 (L)		
1	1	1	2	Vss	Ground
3	2	2	1	Vin	Supply voltage input
2	3	3	3	Vout	Regulated voltage output

■ Product Classification


● Ordering Information

X C 6 2 F X X X X X X X X X
 ↓ ↓ ↑ ↑ ↑ ↑
 a b c d e f

DESIGNATOR	DESCRIPTION	DESIGNATOR	DESCRIPTION
a	Polarity of Output Voltage: P: + (Positive)	e	Package Type M=SOT-23 P=SOT-89 T=TO-92 (Standard) L=TO-92 (Custom pin configuration)
b	Output Voltage 30=3.0V 50=5.0V	f	Device Orientation R=Embossed Tape (Standard Feed) L=Embossed Tape (Reverse Feed) H=Paper Tape (TO-92) B=Bag (TO-92)
c	Temperature Coefficients: 0=±100ppm (typical)		
d	Output Voltage Accuracy: 1=±1.0% (Semi-custom) 2=±2.0%		


■Packaging Information

●SOT-23

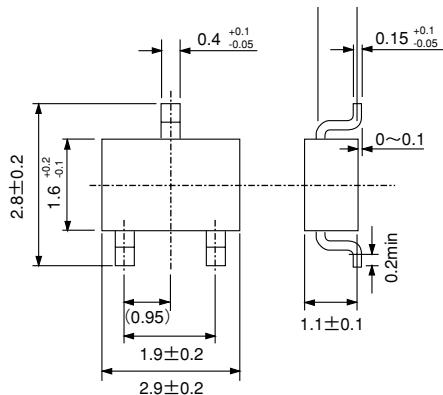


3


●SOT-89

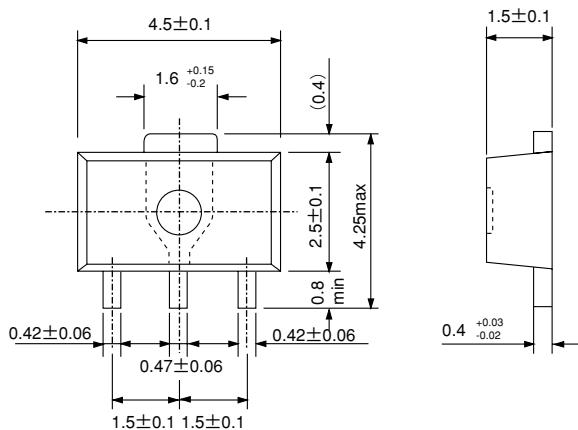

●TO-92

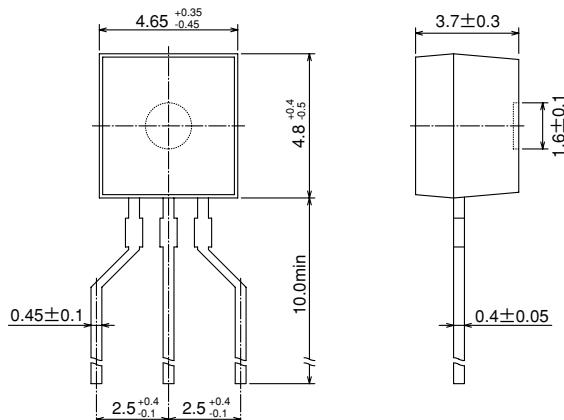


3



■Marking

●SOT-23, SOT-89

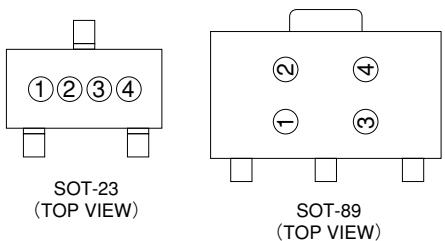

② Represents the decimal number of the Output Voltage

SYMBOL	VOLTAGE(V)	SYMBOL	VOLTAGE(V)
A	①.0	F	①.5
B	①.1	H	①.6
C	①.2	K	①.7
D	①.3	L	①.8
E	①.4	M	①.9

① Represents the integer of the Output Voltage


SYMBOL	VOLTAGE(V)	SYMBOL	VOLTAGE(V)
1	1.②	5	5.②
2	2.②	6	6.②
3	3.②		
4	4.②		

③ Based on internal standards

SYMBOL
0

④ Represents the assembly lot no.
Based on internal standards

●TO-92

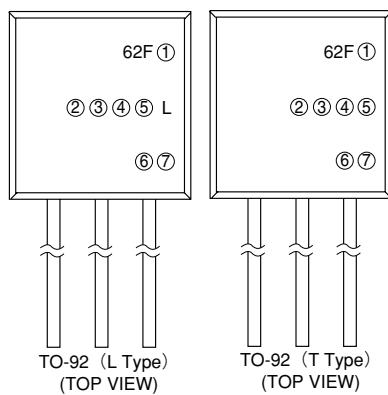

① Represents the polarity of Output Voltage

DESIGNATOR	CONFIGURATION	
P	CMOS	
②	③	VOLTAGE (V)
3	3	3.3
5	0	5.0

④ Represents the temperature characteristics

DESIGNATOR	TEMPERATURE CHARACTERISTICS	
②	③	TPY±100ppm

⑤ Represents the Detect Voltage Accuracy


DESIGNATOR	DETECT VOLTAGE ACCURACY	
②	③	TPY±100ppm
1	within ±1% (semi-custom)	TPY±100ppm
2	within ±2%	TPY±100ppm

⑥ Represents a least significant digit of the produced year

DESIGNATOR	PRODUCED YEAR	
②	③	2000
0	2000	TPY±100ppm
1	2001	TPY±100ppm

⑦ Denotes the production lot number
0 to 9, A to Z repeated (G.I.J.O.Q.W excepted)

■ Block Diagram

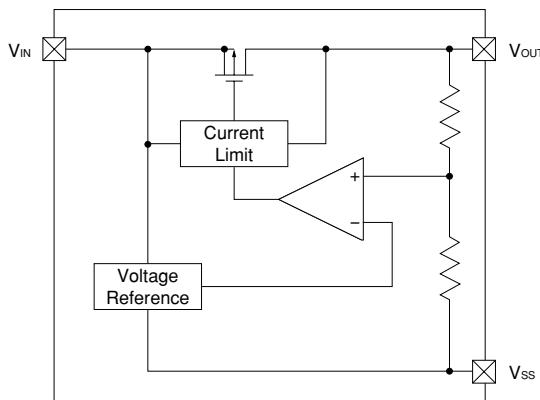

■ Absolute Maximum Ratings

T_a=25°C

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V _{IN}	12	V
Output Current		I _{OUT}	500	mA
Output Voltage		V _{OUT}	V _{ss} -0.3 ~ V _{IN} +0.3	V
Continuous Total Power Dissipation	SOT-23	P _d	150	mW
	SOT-89		500	
	TO-92		300	
Operating Ambient Temperature		T _{opr}	-40 ~ +85	°C
Storage Temperature		T _{stg}	-40 ~ +125	°C

■ Electrical Characteristics

XC62FP5002 V_{OUT}(T)=5.0V (Note1)

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	V _{OUT} (E) (Note2)	I _{OUT} =40mA V _{IN} =6.0V	4.900	5.000	5.100	V	1
Maximum Output Current	I _{OUT} max	V _{IN} =6.0V, V _{OUT} (E) ≥ 4.5V	250			mA	1
Load Stability	ΔV _{OUT}	V _{IN} =6.0V 1mA ≤ I _{OUT} ≤ 100mA		40	80	mV	1
Input -Output Voltage Differential (Note3)	Vdif1	I _{OUT} =100mA		120	300	mV	1
	Vdif2	I _{OUT} =200mA		380	600	mV	1
Supply Current	I _{SS}	V _{IN} =6.0V		2.0	4.5	μA	2
Input Stability	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	I _{OUT} =40mA 6.0V ≤ V _{IN} ≤ 10.0V		0.2	0.3	%/V	1
Input Voltage	V _{IN}				10	V	—
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{OPR} \cdot V_{OUT}}$	I _{OUT} =40mA -40°C ≤ T _{OPR} ≤ 85°C		±100		ppm/°C	1

XC62FP4002 V_{OUT}(T)=4.0V (Note1)

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	V _{OUT} (E) (Note2)	I _{OUT} =40mA V _{IN} =5.0V	3.920	4.000	4.080	V	1
Maximum Output Current	I _{OUT} max	V _{IN} =5.0V, V _{OUT} (E) ≥ 3.6V	200			mA	1
Load Stability	ΔV _{OUT}	V _{IN} =5.0V 1mA ≤ I _{OUT} ≤ 100mA		45	90	mV	1
Input -Output Voltage Differential (Note3)	Vdif1	I _{OUT} =100mA		170	330	mV	1
	Vdif2	I _{OUT} =200mA		400	630	mV	1
Supply Current	I _{SS}	V _{IN} =5.0V		2.0	4.5	μA	2
Input Stability	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	I _{OUT} =40mA 5.0V ≤ V _{IN} ≤ 10.0V		0.2	0.3	%/V	1
Input Voltage	V _{IN}				10	V	—
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{OPR} \cdot V_{OUT}}$	I _{OUT} =40mA -40°C ≤ T _{OPR} ≤ 85°C		±100		ppm/°C	1

XC62FP3002 V_{OUT}(T)=3.0V (Note1)

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	V _{OUT} (E) (Note2)	I _{OUT} =40mA V _{IN} =4.0V	2.940	3.000	3.060	V	1
Maximum Output Current	I _{OUT} max	V _{IN} =4.0V, V _{OUT} (E) ≥ 2.7V	150			mA	1
Load Stability	ΔV _{OUT}	V _{IN} =4.0V 1mA ≤ I _{OUT} ≤ 80mA		45	90	mV	1
Input -Output Voltage Differential (Note3)	V _{dif1}	I _{OUT} =80mA		180	360	mV	1
	V _{dif2}	I _{OUT} =160mA		400	700	mV	1
Supply Current	I _{SS}	V _{IN} =4.0V		2.0	4.5	μA	2
Input Stability	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	I _{OUT} =40mA 4.0V ≤ V _{IN} ≤ 10.0V		0.2	0.3	%/V	1
Input Voltage	V _{IN}				10	V	—
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{OPR} \cdot V_{OUT}}$	I _{OUT} =40mA -40°C ≤ T _{OPR} ≤ 85°C		±100		ppm/°C	1

XC62FP2002 V_{OUT}(T)=2.0V (Note1)


Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage	V _{OUT} (E) (Note2)	I _{OUT} =40mA V _{IN} =3.0V	1.960	2.000	2.040	V	1
Maximum Output Current	I _{OUT} max	V _{IN} =3.0V, V _{OUT} (E) ≥ 1.8V	100			mA	1
Load Stability	ΔV _{OUT}	V _{IN} =3.0V 1mA ≤ I _{OUT} ≤ 60mA		45	90	mV	1
Input -Output Voltage Differential (Note3)	V _{dif1}	I _{OUT} =60mA		180	360	mV	1
	V _{dif2}	I _{OUT} =120mA		400	700	mV	1
Supply Current	I _{SS}	V _{IN} =3.0V		2.0	4.5	μA	2
Input Stability	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	I _{OUT} =40mA 3.0V ≤ V _{IN} ≤ 10.0V		0.2	0.3	%/V	1
Input Voltage	V _{IN}				10	V	—
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T_{OPR} \cdot V_{OUT}}$	I _{OUT} =40mA -40°C ≤ T _{OPR} ≤ 85°C		±100		ppm/°C	1

Note: 1. V_{OUT}(T)=Specified Output Voltage .2. V_{OUT}(E)=Effective Output Voltage (i.e. the output voltage when "V_{OUT}(T)+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).3. V_{dif}= {V_{IN1} (Note4)}-V_{OUT} (E)4. V_{IN1}= The input voltage at the time 98% of V_{OUT}(E) is output (input voltage has been gradually reduced).

■ Typical Application Circuit

● Standard Circuit

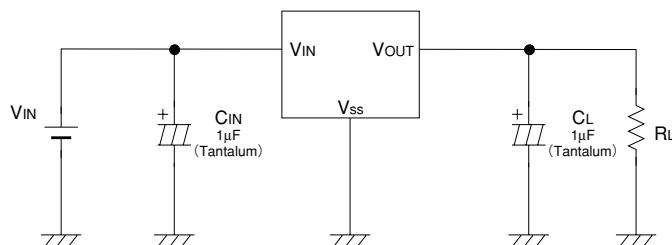

3


■ Directions for use

● Notes on Use

1. Please use this IC within the stipulated absolute maximum ratings as the IC is liable to malfunction outside of such parameters.
2. There is a possibility that oscillation may occur as a result of the impedance present between the power supply and the IC's input. Where impedance is 10Ω or more, please use a capacitor (C_{IN}) of at least $1\mu F$. With a large output current, operations can be stabilised by increasing capacitor size (C_{IN}). If C_{IN} is small and capacitor size (C_L) is increased, there is a possibility of oscillation due to input impedance. In such cases, operations can be stabilised by either increasing the size of C_{IN} or decreasing the size of C_L .
3. Please ensure that output current (I_{OUT}) is less than $P_d \div (V_{IN} - V_{OUT})$ and does not exceed the stipulated Continuous Total Power Dissipation value (P_d) for the package.
4. Should you wish to increase output current (I_{OUT}) and/or have the capability to exceed the stipulated P_d value, using a current boost circuit (similar to the one shown below) is likely to lead to oscillation.


With such applications, we recommend use of a boost type voltage regulator, such as the Torex XC62EP series.

Current Boost Circuit : Poor Example

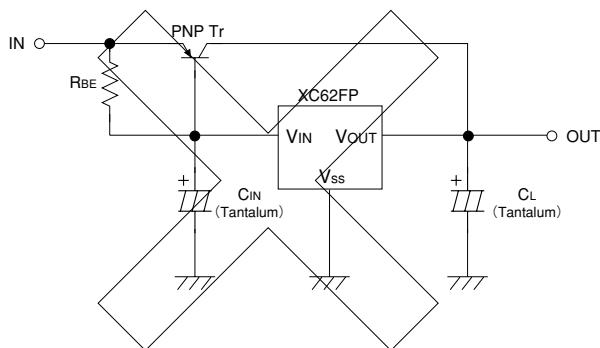


■Test Circuits

Circuit 1

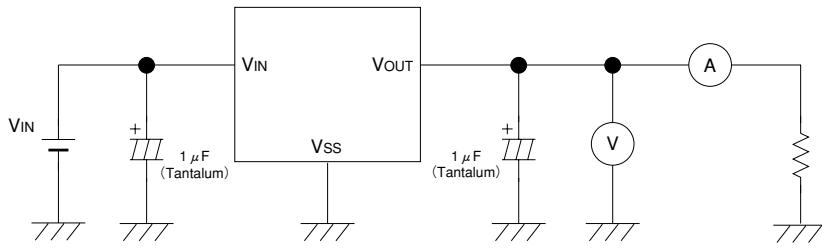

3


Circuit 2

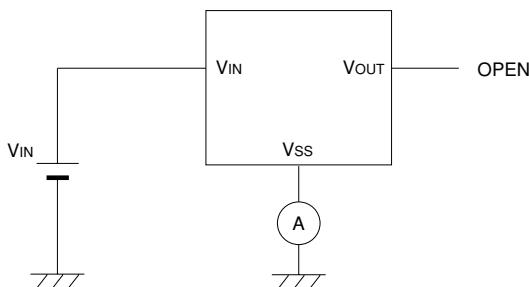


■Typical Performance Characteristics

(1) OUTPUT VOLTAGE vs. OUTPUT CURRENT


XC62FP5002 (5V)

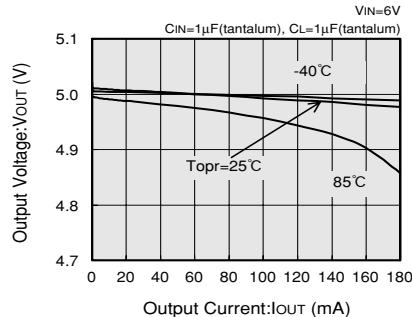


XC62FP4002 (4V)

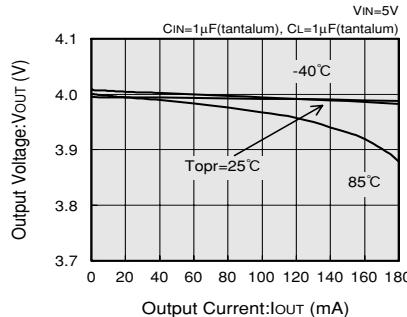

XC62FP3002 (3V)

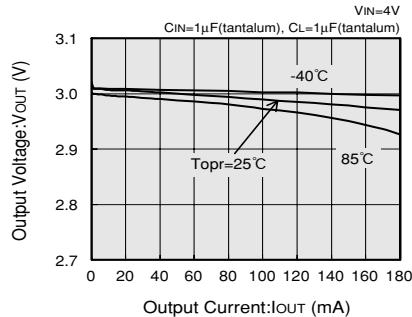


XC62FP2002 (2V)

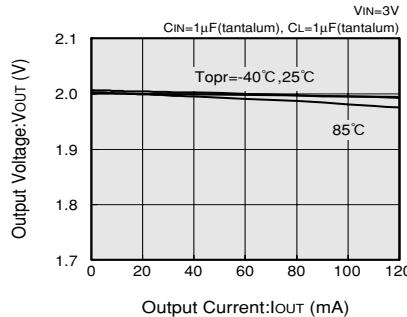


(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE


XC62FP5002 (5V)

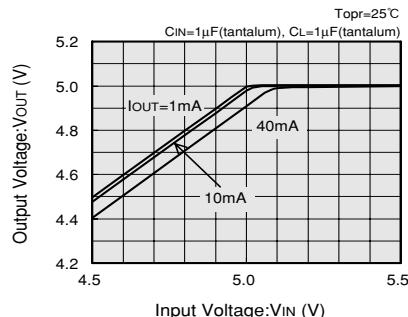


XC62FP5002 (5V)

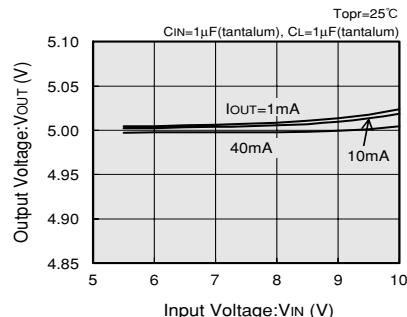

XC62FP4002 (4V)

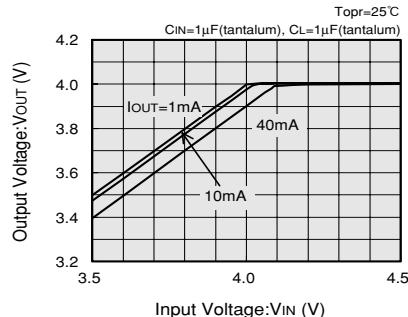


XC62FP4002 (4V)

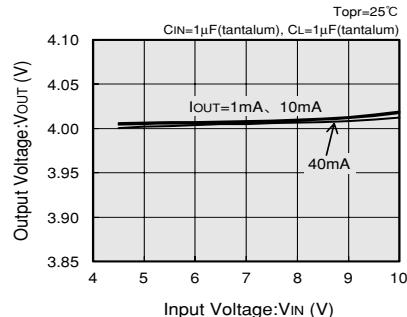


(2) OUTPUT VOLTAGE vs. INPUT VOLTAGE


XC62FP3002 (3V)

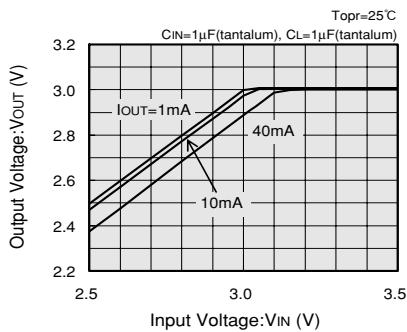


XC62FP3002 (3V)

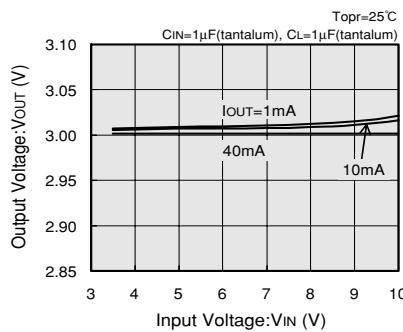

XC62FP2002 (2V)

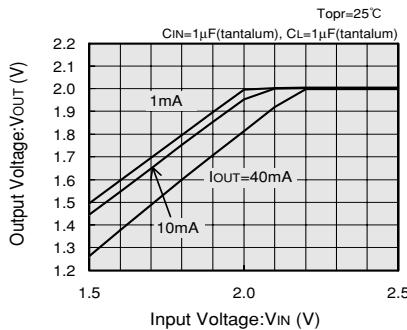


XC62FP2002 (2V)

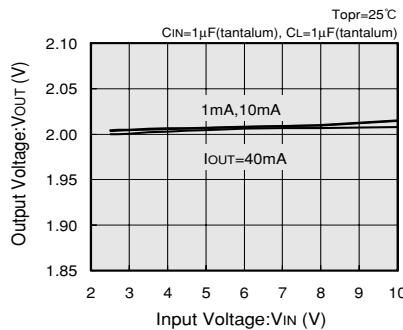


(3) INPUT/OUTPUT VOLTAGE DIFFERENTIAL vs. OUTPUT CURRENT


XC62FP5002 (5V)

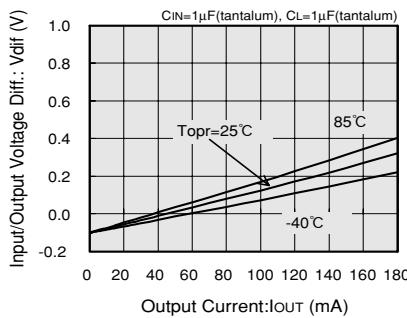


XC62FP4002 (4V)

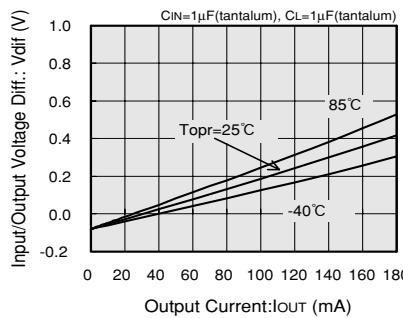









XC62FP3002 (3V)

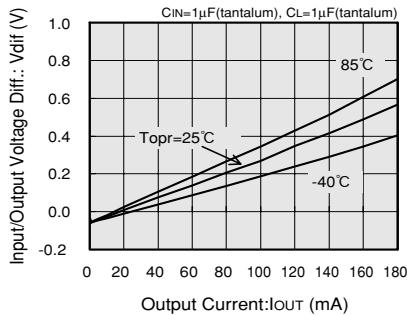

XC62FP2002 (2V)

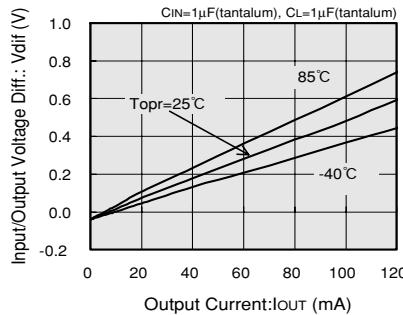


(4) SUPPLY CURRENT vs. INPUT VOLTAGE

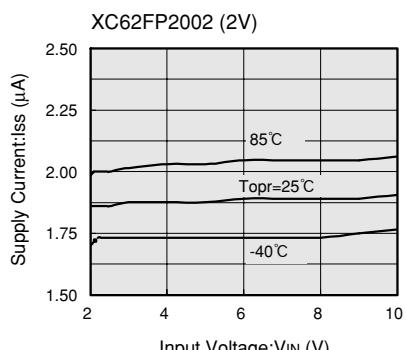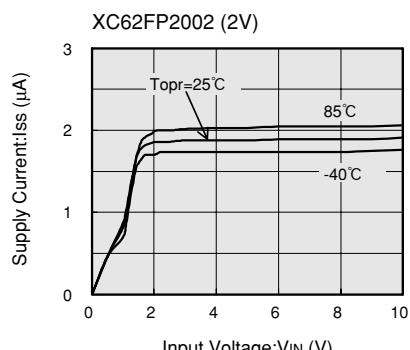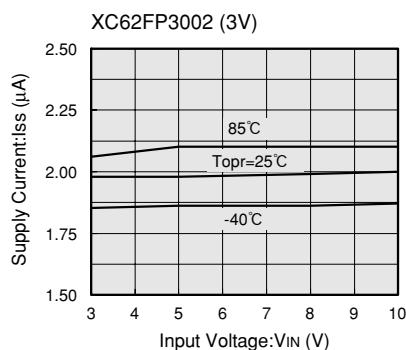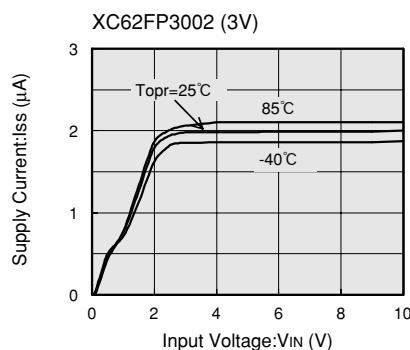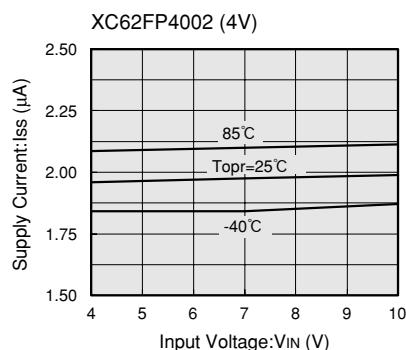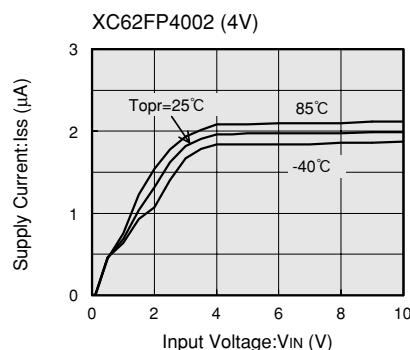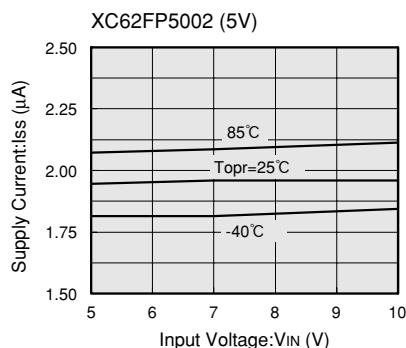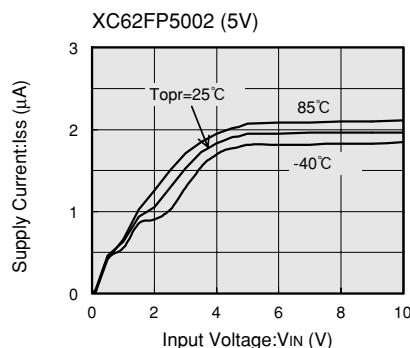


(5) OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE


XC62FP5002 (5V)

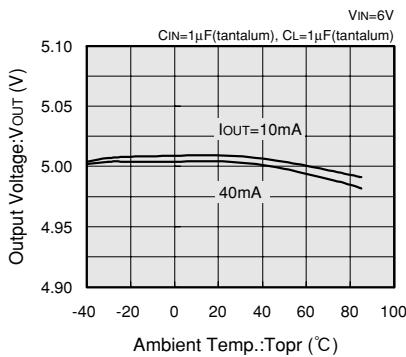


XC62FP4002 (4V)

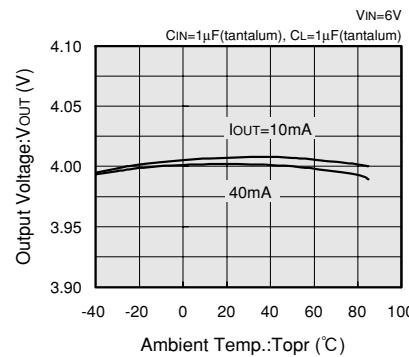

XC62FP3002 (3V)

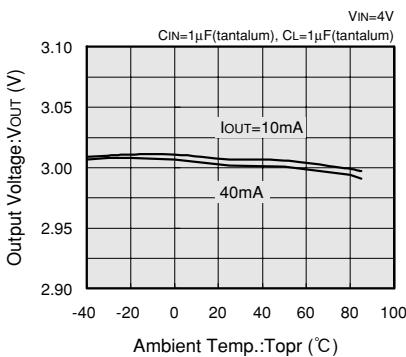


XC62FP2002 (2V)

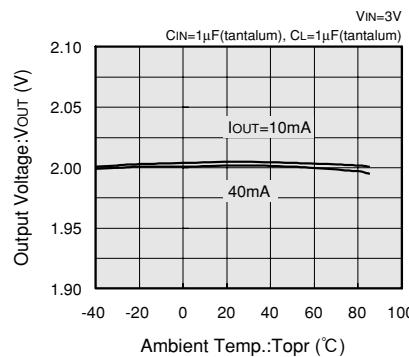


(6) SUPPLY CURRENT vs. AMBIENT TEMPERATURE


XC62FP5002 (5V)

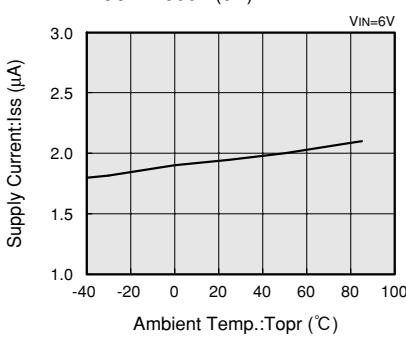


XC62FP4002 (4V)

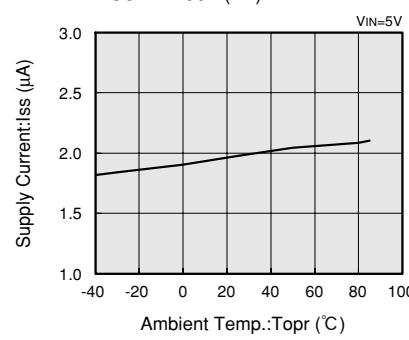

XC62FP3002 (3V)

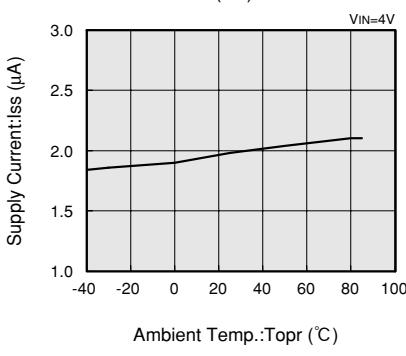


XC62FP2002 (2V)

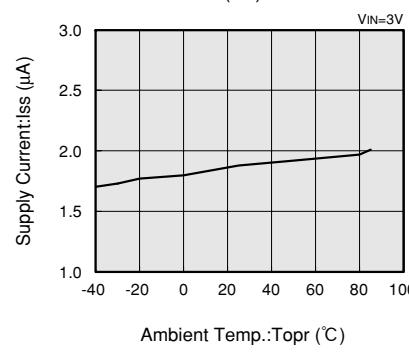


(7) INPUT TRANSIENT RESPONSE 1


XC62FP5002 (5V)

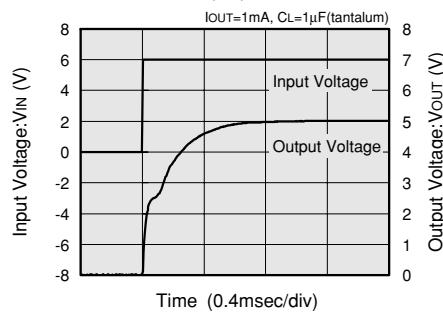


XC62FP5002 (5V)

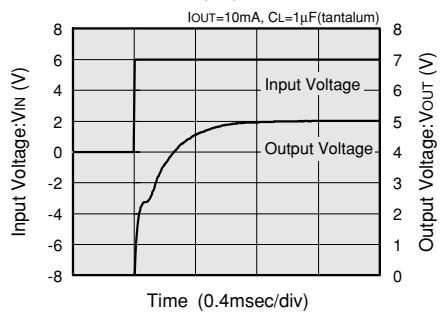


XC62FP4002 (4V)

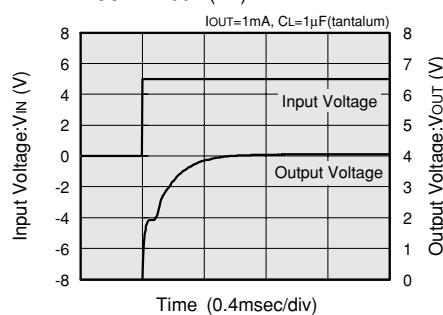


XC62FP4002 (4V)

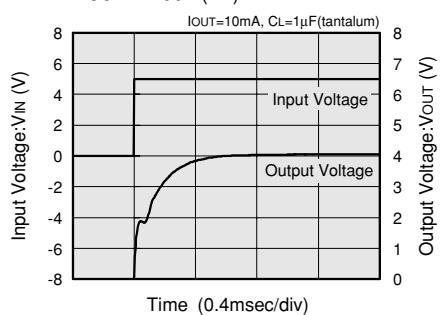


XC62FP3002 (3V)

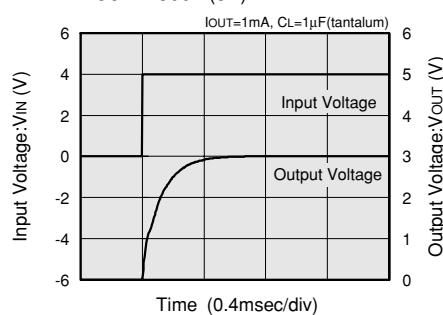


XC62FP3002 (3V)

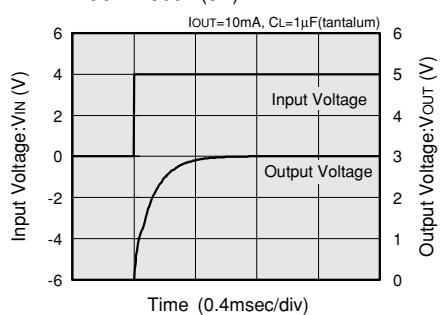









XC62FP2002 (2V)

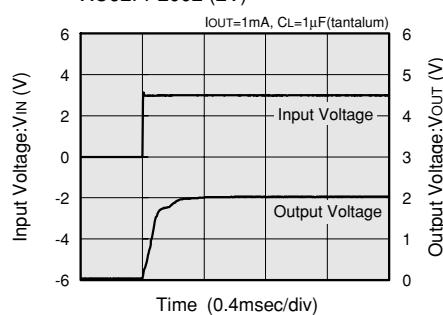



XC62FP2002 (2V)

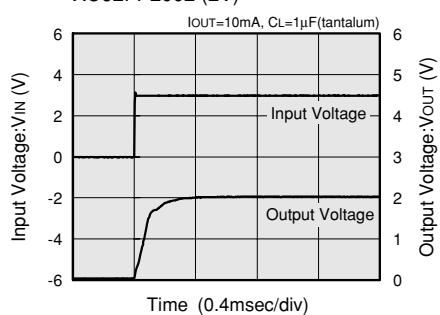





(8) INPUT TRANSIENT RESPONSE 2

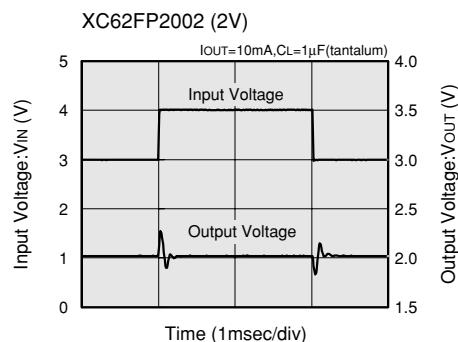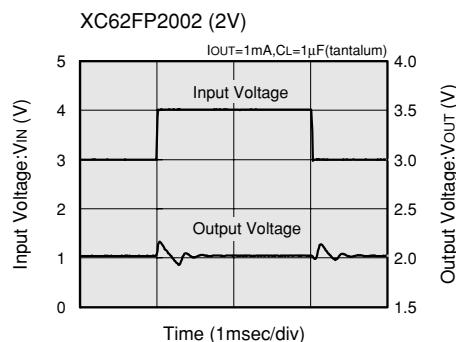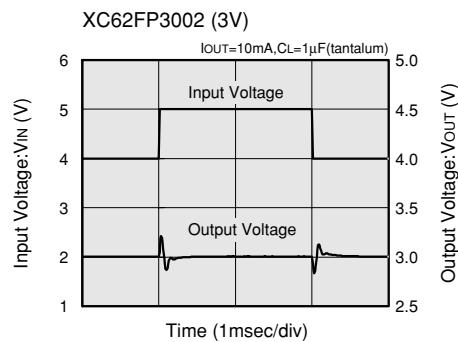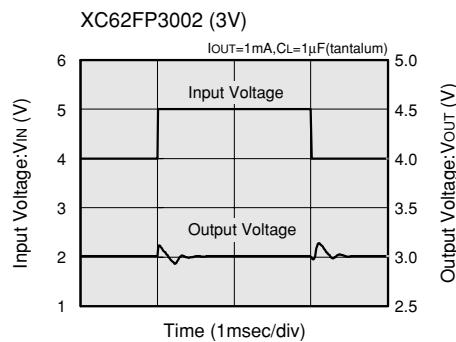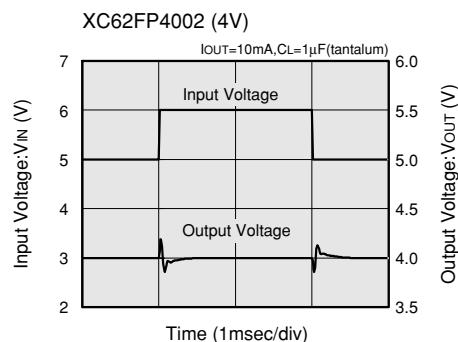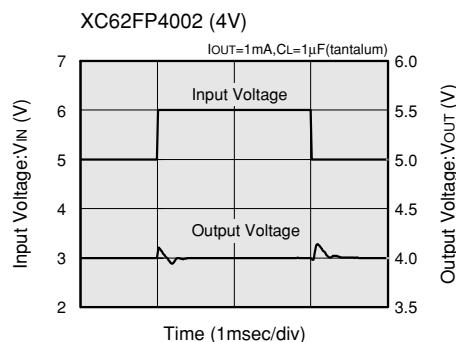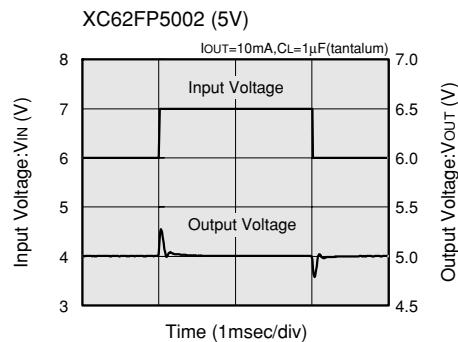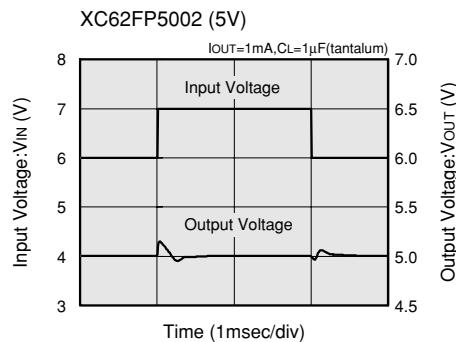

(9) LOAD TRANSIENT RESPONSE

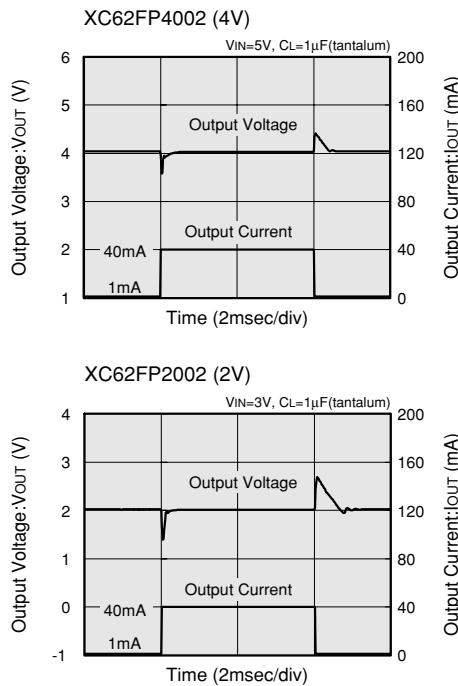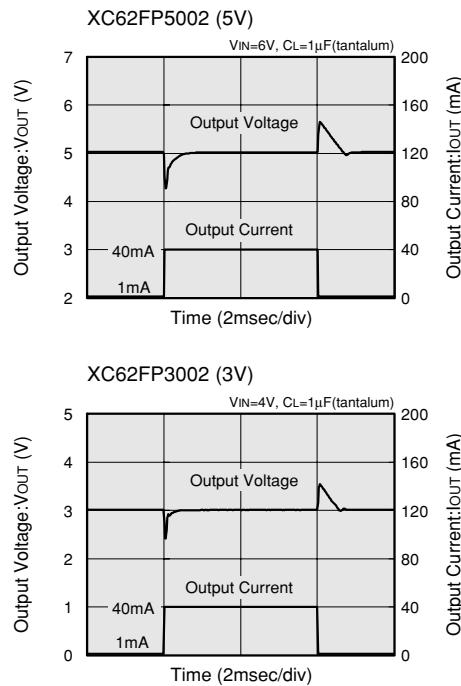

(10) RIPPLE REJECTION RATE

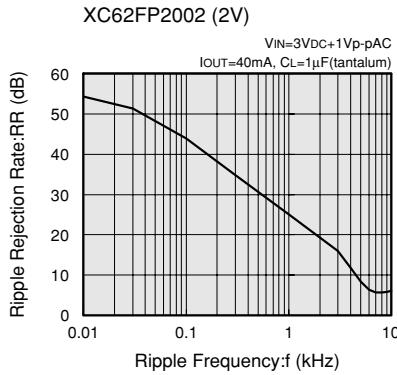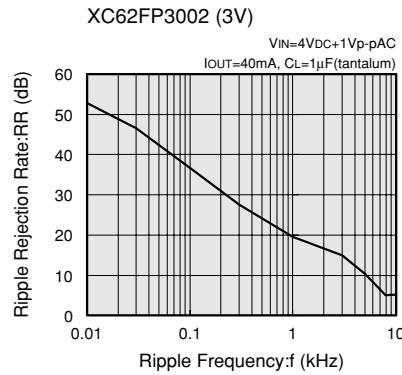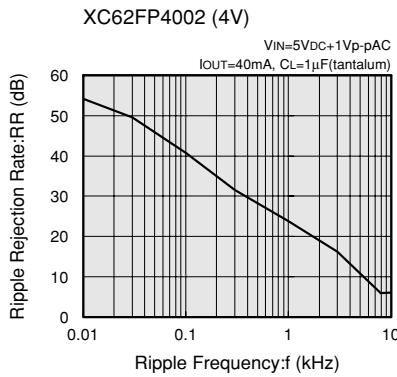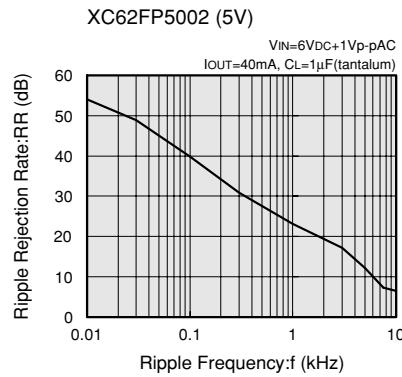

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LDO Voltage Regulators category:

Click to view products by Torex Semiconductor manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT\)](#) [TCR3DF45,LM\(CT\)](#) [TLE4473G V52](#) [059985X](#)
[NCP4687DH15T1G](#) [701326R](#) [NCV8170AXV250T2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#)
[TCR3DG12,LF](#) [MIC5514-3.3YMT-T5](#) [SCD7912BTG](#) [NCP154MX180270TAG](#) [SCD33269T-5.0G](#) [NCV8170BXV330T2G](#)
[NCV8170BMX330TCG](#) [NCV8170AMX120TCG](#) [NCP706ABMX300TAG](#) [NCP153MX330180TCG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#)
[CAT6243-ADJCMT5T](#) [TCR3DG33,LF](#) [TCR4DG35,LF](#) [TAR5S15U\(TE85L,F\)](#) [TAR5S18U\(TE85L,F\)](#) [TCR3UG19A,LF](#) [TCR4DG105,LF](#)
[MPQ2013AGG-5-P](#) [NCV8170AMX360TCG](#) [TLE4268GSXUMA2](#) [NCP715SQ15T2G](#) [MIC5317-3.0YD5-T5](#) [NCV563SQ18T1G](#)
[NCP715MX30TBG](#) [NCV8702MX25TCG](#) [NCV8170BXV120T2G](#) [MIC5317-1.2YD5-T5](#) [NCV8170AMX150TCG](#) [NCV8170BMX150TCG](#)
[AP2213D-3.3TRG1](#) [NCV8170BMX120TCG](#) [NCV8170BMX310TCG](#) [NCV8170BMX360TCG](#)