

### **Electrical Testing** per Tusonix standard test plans and Mil-Std-202 Test Methods.

## MARKETING SALES DRAWING **DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - [ ]**



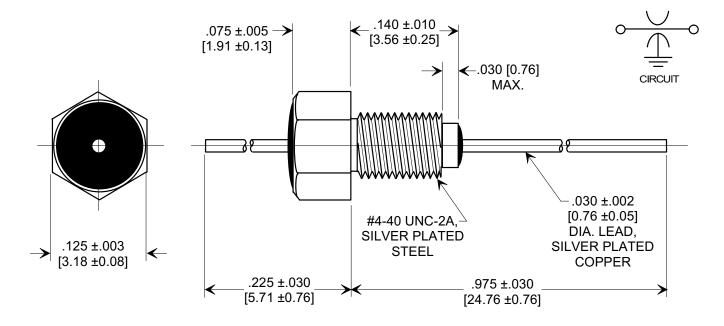

## MOUNTING HARDWARE



**HEX NUT** 

#### NOTES:

- 1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
- 2. SILVER PLATED CASE, LEAD AND MOUNTING HARDWARE.
- 3. MAX. RECOMMENDED MOUNTING TORQUE: 2.0 lb. in.
- 4. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C. SEE INSTALLATION RECOMMENDATIONS.

Drawn

- 5. NUT AND LOCKWASHER INCLUDED.
- 6. TUSONIX TRADEMARK AND PART VARIATION NUMBER STAMPED ON HEX FLATS.

	ORD							•		SIVIE	- ⊢MI	FII TE	ĸ
2								Specified		MINIATURE BUSHING   STYLE EMI FILTER			
			0					TOLERANCE		itle			
		С	CAP.(pf)	TOLERANCE	DC WC	RKING TAGE	CURRE (AMPS	`   'V''''	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				
					85 °C	125 °C			10 MHz	100 MHz	1 GHz	10 GHz	
			27,000	GMV	70	50	10	10	28	42	65	65	

REVISION RECC Original Release C.O.	WAS SK 8025-000 L.E. 10-17-01	20011015-4-04
---	----------------------------------	---------------

**TUCSON, ARIZONA** 

**NOTED** 

ANGLES ±

Scale 8 X S.M. 10-11-01 Approved B.Mc. 10-11-01 4403-060 Α

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for cts manufacturer:

Other Similar products are found below:

744C083333JP 407F11C012M0000 0538-011-F-15.0-60 Z3A-22IB-3-BNL 4306-033 CB3LV-3C-32M7680 744C083222JP 744C083102JP 770101223 4400-506 026TB32R253B1A1 APF30-30-13CB/A01 MXO45HST-3C-16M0000 CB3-3I-24M0000 ATS061C 743C083104JP 744C083472JP 77083103P 218-10LPSTRF 07050147456MFDA4SC 402WF20012IMR KFF6516A 194-8MST 742C083330JPTR 750-101-R120 766143221GP 766163470GP 77061333P 403C35D12M00000 7609-501LF CTS-1621 745C101103JP 284TBCF502A26A1 766163560GP CB3-3I-20M0000 4300-060LF 218-4LPSTF 4400-032 ATS12ASM-1 201XR104B 770103101P 209-2MSF 6740-2015 CB3-3C-1M5440 T8031-5V 206-12ST 767163104D PB1-36ND ATS049BSM-1E TX0506-1B