

# HC49/4H Crystals

ISSUE 12; 29 SEPTEMBER 2004

## Delivery Options

- Common frequencies may be available from stock
- Lower height holders available please contact sales office

## Holder Style

- HC49/4H crystals are resistance welded, hermetically sealed in an inert atmosphere with glass to metal seals securing the lead wires
- Holders suffixed '-3L have a centre third wire which grounds the case

## General Specifications

- Load Capacitance ( $C_L$ ): 10pF to 75pF or Series
- Drive Level: 500 $\mu$ W max.
- Static Capacitance ( $C_0$ ): 7pF max.
- Ageing:  $\pm 5$ ppm typical per year,  $\pm 1$ ppm available on request

## Standard Frequency Tolerances and Stabilities

- $\pm 10$ ppm,  $\pm 20$ ppm,  $\pm 30$ ppm,  $\pm 50$ ppm,  $\pm 100$ ppm, tighter tolerances and stabilities available on request.

## Operating Temperature Ranges

- 0 to 50°C    -30 to 80°C
- 10 to 60°C    -40 to 90°C
- 20 to 70°C    -55 to 105°C

## Storage Temperature Range

- 55 to 125°C

## Environmental Specification

- Shock: 981m/s<sup>2</sup> for 6ms, three shocks in each direction along three mutually perpendicular planes
- Vibration: 10 to 60Hz 0.75mm displacement, 60 to 500Hz 98.1m/s<sup>2</sup> acceleration, 30 minutes in each of three mutually perpendicular planes


## Marking

- Frequency only


## Minimum Order Information Required

- Frequency + Holder + Frequency Tolerance @ 25°C + Frequency Stability + Operating Temperature Range + Circuit Condition + Overtone Order + Tape & Reel Packaging Available


## Outline in mm - HC49/4H & HC49/4H-3L

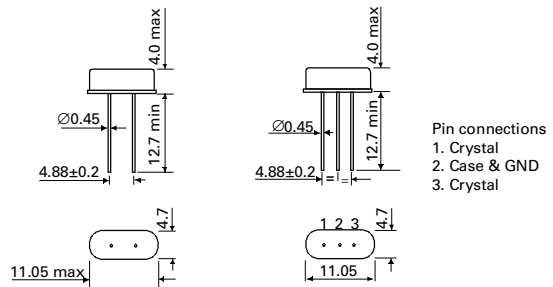

## Typical Frequency vs Temperature Curves for various angles of AT-cut crystals

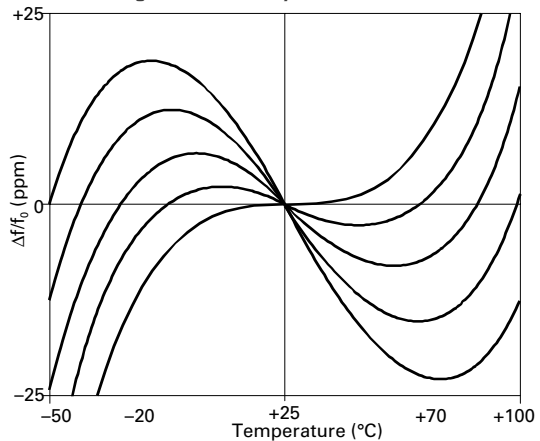

## Typical Frequency vs Temperature Curves for various angles of BT-cut crystals

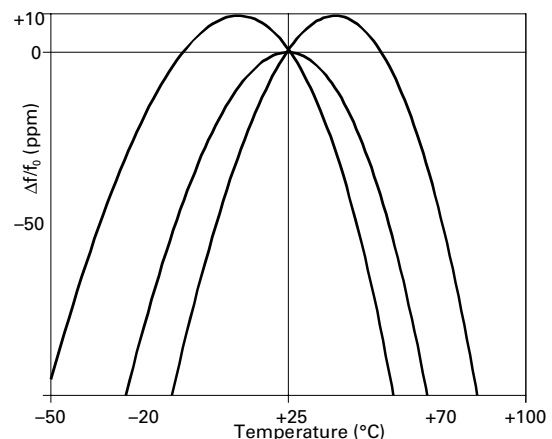

**Electrical Specifications - maximum limiting values**

Frequency Range	Frequency Tolerance @ 25°C ±2°C	Operating Temperature Range	Frequency Stability Available Over Operating Temperature		ESR max.	Vibration Mode
			Minimum	Maximum		
3.2 to <4.0MHz	±10ppm to ±100ppm	0 to 50°C	±15ppm	±100ppm	300Ω	Fundamental AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±30ppm	±100ppm		
		-55 to 105°C	±100ppm	±500ppm		
4.0 to <5.5MHz	±10ppm to ±100ppm	0 to 50°C	±15ppm	±100ppm	130Ω	Fundamental AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±30ppm	±100ppm		
		-55 to 105°C	±100ppm	±500ppm		
5.5 to <6.0MHz	±10ppm to ±100ppm	0 to 50°C	±15ppm	±100ppm	100Ω	Fundamental AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±30ppm	±100ppm		
		-55 to 105°C	±100ppm	±500ppm		
6.0 to <9.0MHz	±10ppm to ±100ppm	0 to 50°C	±15ppm	±100ppm	80Ω	Fundamental AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±30ppm	±100ppm		
		-55 to 105°C	±100ppm	±500ppm		
9.0 to <13.0MHz	±10ppm to ±100ppm	0 to 50°C	±15ppm	±100ppm	60Ω	Fundamental AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±30ppm	±100ppm		
		-55 to 105°C	±100ppm	±500ppm		
13.0 to <20.0MHz	±10ppm to ±100ppm	0 to 50°C	±15ppm	±100ppm	40Ω	Fundamental AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±30ppm	±100ppm		
		-55 to 105°C	±100ppm	±500ppm		
20.0 to <30.0MHz	±10ppm to ±100ppm	0 to 50°C	±15ppm	±100ppm	30Ω	Fundamental AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±30ppm	±100ppm		
		-55 to 105°C	±100ppm	±500ppm		

LEADED QUARTZ CRYSTALS

Frequency Range	Frequency Tolerance @ 25°C ±2°C	Operating Temperature Range	Frequency Stability Available over Operating Temperature		ESR max.	Vibration Mode
			Minimum	Maximum		
27.0 to 50.0MHz	Inclusive with Frequency Stability	0 to 50°C	±50ppm	±100ppm	40Ω	Fundamental BT cut
		-10 to 60°C	±70ppm	±100ppm		
		-20 to 70°C	±100ppm	±100ppm		
28.0 to 100.0MHz	±10ppm to 100ppm	0 to 50°C	±15ppm	±100ppm	100Ω	3rd Overtone AT cut
		-10 to 60°C	±20ppm	±100ppm		
		-20 to 70°C	±20ppm	±100ppm		
		-30 to 80°C	±25ppm	±100ppm		
		-40 to 90°C	±50ppm	±100ppm		
		-55 to 105°C	±50ppm	±100ppm		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [IQD](#) manufacturer:*

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)  
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)  
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)  
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)  
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)  
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)  
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)  
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)