


Driver LC 50/60W 1200/700/1400mA fixC C SNC

essence series

Product description

- Fixed output built-in LED Driver
- Constant current LED Driver
- For luminaires of protection class I and protection class II
- Temperature protection as per EN 61347-2-13 C5e
- KC certificate for LC 60W 1400mA fixC C SNC
- Output current 1,200, 700 or 1,400 mA
- Max. output power 50 or 60 W
- Nominal lifetime up to 50,000 h
- 5 years guarantee (conditions at www.tridonic.com)

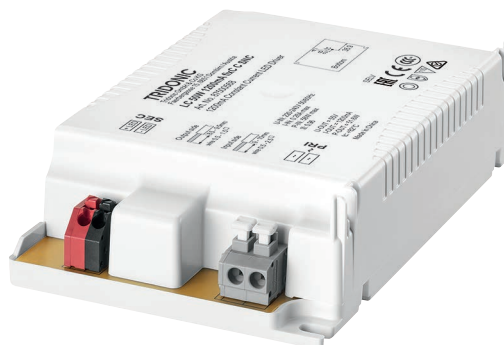

Housing properties

- Casing: polycarbonat, white
- Type of protection IP20

Functions

- Overtemperature protection
- Overload protection
- Short-circuit protection
- No-load protection



Standards, page 3

Wiring diagrams and installation examples, page 4




IP20 SELV

Driver LC 50/60W 1200/700/1400mA fixC C SNC

essence series

Technical data

| | |
|--|--------------------|
| Rated supply voltage | 220 – 240 V |
| AC voltage range | 198 – 264 V |
| Mains frequency | 50 / 60 Hz |
| Overvoltage protection | 320 V AC, 1 h |
| THD (at 230 V, 50 Hz, full load) | < 20 % |
| Output current tolerance [®] | ± 7.5 % |
| Typ. current ripple (at 230 V, 50 Hz, full load) | ± 30 % |
| Starting time (at 230 V, 50 Hz, full load) | ≤ 0.5 s |
| Turn off time (at 230 V, 50 Hz, full load) | ≤ 0.2 s |
| Hold on time at power failure (output) | 0 s |
| Ambient temperature t_a | -20 ... +50 °C |
| Ambient temperature t_a (at lifetime 50,000 h) | 40 °C |
| Storage temperature t_s | -40 ... +80 °C |
| Lifetime | up to 50,000 h |
| Guarantee (conditions at www.tridonic.com) | 5 years |
| Dimensions L x W x H | 123 x 75 x 29.7 mm |

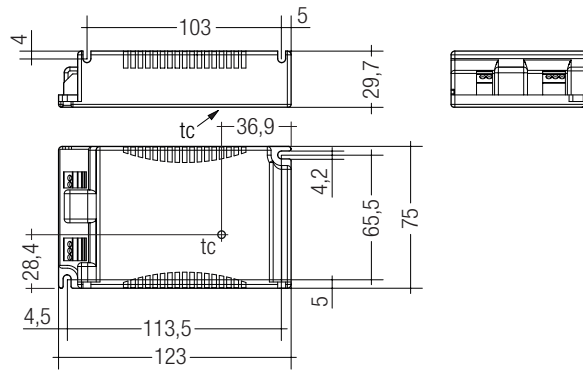

Ordering data

| Type [®] | Article number [®] | Packaging, carton | Packaging, low volume | Packaging, high volume | Weight per pc. |
|---------------------------------|-----------------------------|-------------------|-----------------------|------------------------|----------------|
| LC 50W 1200mA fixC C SNC | 87500568 | 30 pc(s). | 450 pc(s). | 2,250 pc(s). | 0.151 kg |
| LC 60W 700mA fixC C SNC | 87500569 | 30 pc(s). | 450 pc(s). | 2,250 pc(s). | 0.147 kg |
| LC 60W 1400mA fixC C SNC | 87500570 | 30 pc(s). | 450 pc(s). | 2,250 pc(s). | 0.156 kg |

Specific technical data

| Type | Output current [®] | Input current (at 230 V, 50 Hz, full load) | Max. input power | Typ. power consumption (at 230 V, 50 Hz, full load) | Output power range | λ at full load [®] | Efficiency at full load [®] | λ at min. load [®] | Efficiency at min. load [®] | Min. forward voltage | Max. forward voltage | Max. output voltage | Max. output peak current at full load [®] | Max. output peak current at min. load [®] | Max. casing temperature t_c |
|---------------------------------|-----------------------------|--|------------------|---|--------------------|-------------------------------------|--------------------------------------|-------------------------------------|--------------------------------------|----------------------|----------------------|---------------------|--|--|-------------------------------|
| LC 50W 1200mA fixC C SNC | 1,200 mA | 260 mA | 58 W | 55.5 W | 36.0 – 51.6 W | 0.96 | 90 % | 0.92C | 88 % | 30 V | 43 V | 55 V | 1,700 mA | 1,800 mA | 82 °C |
| LC 60W 700mA fixC C SNC | 700 mA | 290 mA | 68 W | 66.0 W | 42.0 – 59.5 W | 0.96 | 91 % | 0.94C | 89 % | 60 V | 85 V | 100 V | 1,000 mA | 1,100 mA | 85 °C |
| LC 60W 1400mA fixC C SNC | 1,400 mA | 300 mA | 68 W | 66.5 W | 42.0 – 60.2 W | 0.96 | 90 % | 0.94C | 88 % | 30 V | 43 V | 55 V | 2,000 mA | 2,100 mA | 88 °C |

[®] Test result at 230 V, 50 Hz.

[®] The trend between min. and full load is linear.

[®] Output current is mean value.

[®] KC approval mark for art. no.: 87500568 and 87500570.

Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547

Overload protection

If the maximum load is exceeded by a defined internal limit, the LED Driver will protect itself and LED may flicker. After elimination of the overload, the nominal operation is restored automatically.

Overtemperature protection

The LED Driver is protected against temporary thermal overheating. If the temperature limit is exceeded, the output current is reduced to limit t_c at a certain level.

The temperature protection is activated typically at 10 °C above t_c max.

Short-circuit behaviour

In case of a short circuit on the secondary side (LED) the LED Driver switches into hic-cup mode. After elimination of the short-circuit fault the LED Driver will recover automatically.

No-load operation

The LED Driver works in burst working mode to provide a constant output voltage regulation which allows the application to be able to work safely when LED string opens due to a failure.

Expected lifetime

| Type | t_a | 40 °C | 50 °C | 60 °C |
|---------------------------------|----------|----------|----------|-------|
| LC 50W 1200mA fixC C SNC | t_c | 70 °C | 82 °C | x |
| | Lifetime | 50,000 h | 30,000 h | x |
| LC 60W 700mA fixC C SNC | t_c | 75 °C | 85 °C | x |
| | Lifetime | 50,000 h | 30,000 h | x |
| LC 60W 1400mA fixC C SNC | t_c | 75 °C | 88 °C | x |
| | Lifetime | 50,000 h | 30,000 h | x |

The LED Drivers are designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.

Lifetime declarations are informative and represent no warranty claim.

The relation of t_c to t_a temperature depends also on the luminaire design. If the measured t_c temperature is approx. 5 K below t_c max., t_a temperature should be checked and eventually critical components (e.g. ELCAP) measured. Detailed information on request.

Maximum loading of automatic circuit breakers in relation to inrush current

| Automatic circuit breaker type | C10 | C13 | C16 | C20 | B10 | B13 | B16 | B20 | Inrush current | |
|---------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|----------------|-------|
| Installation Ø | 1.5 mm ² | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | 1.5 mm ² | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | I_{max} | Time |
| LC 50W 1200mA fixC C SNC | 35 | 45 | 60 | 80 | 35 | 45 | 60 | 80 | 10 A | 50 µs |
| LC 60W 700mA fixC C SNC | 25 | 35 | 45 | 55 | 25 | 35 | 45 | 55 | 12 A | 50 µs |
| LC 60W 1400mA fixC C SNC | 25 | 35 | 45 | 55 | 25 | 35 | 45 | 55 | 12 A | 50 µs |

These are max. values calculated out of continuous current running the device on full load.

There is no limitation due to inrush current.

If load is smaller than full load for calculation only continuous current has to be considered.

Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %

| | THD | 3. | 5. | 7. | 9. | 11. |
|---------------------------------|------|------|-----|-----|-----|-----|
| LC 50W 1200mA fixC C SNC | < 20 | < 12 | < 4 | < 2 | < 2 | < 2 |
| LC 60W 700mA fixC C SNC | < 20 | < 12 | < 4 | < 2 | < 2 | < 2 |
| LC 60W 1400mA fixC C SNC | < 20 | < 12 | < 4 | < 2 | < 2 | < 2 |

Glow-wire test

according to EN 61347-1 with increased temperature of 850 °C passed.

Mounting of device

Max. torque for fixing: 0.5 Nm/M4

Conditions of use and storage

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (t_a) before they can be operated.

Installation instructions

The LED module and all contact points within the wiring must be sufficiently insulated against 3 kV surge voltage.


Air and creepage distance must be maintained.

Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 10 seconds
4. Connect LED module again

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Wiring diagram

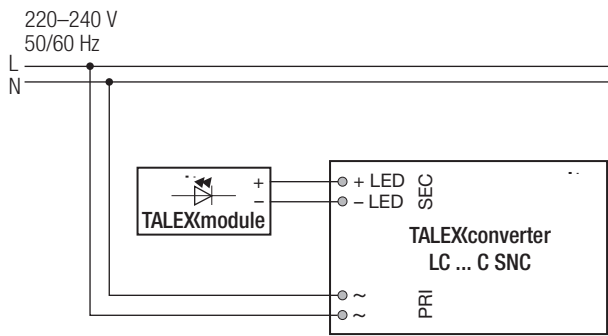

Insulation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an insulation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal. The insulation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Conditions of use

The LED Driver is declared as inbuilt LED controlgear, meaning it is intended to be used within a luminaire enclosure.

If the product is used outside a luminaire, the installation must provide suitable protection for people and environment (e.g. in illuminated ceilings).

Maximum number of switching cycles

All LED Driver are tested with 50,000 switching cycles.

Additional information

Additional technical information at www.tridonic.com → Technical Data

Lifetime declarations are informative and represent no warranty claim. No warranty if device was opened.


Wiring type and cross section

The input wiring can be stranded wires with ferrules with a cross section of 0.5 – 1.5 mm² or with solid wires with a cross section of 0.5 – 2.5 mm². Strip 9 – 10 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.

The output wiring can be done with a cross section of 0.5 – 1.5 mm². Strip 8.5 – 9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.


Input wiring

wire preparation:
Solid: 0.5 – 2.5 mm²
Fine-stranded: 0.5 – 1.5 mm²



Output wiring

wire preparation:
0.5 – 1.5 mm²




Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output wires is 2 m.
- Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.
- To avoid the damage of the Driver, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).


Release of the wiring

Press down the “push button” and remove the cable from front.

Input terminal




Output terminal




Diagrams LC 50W 1200mA fixC C SNC


Efficiency vs load

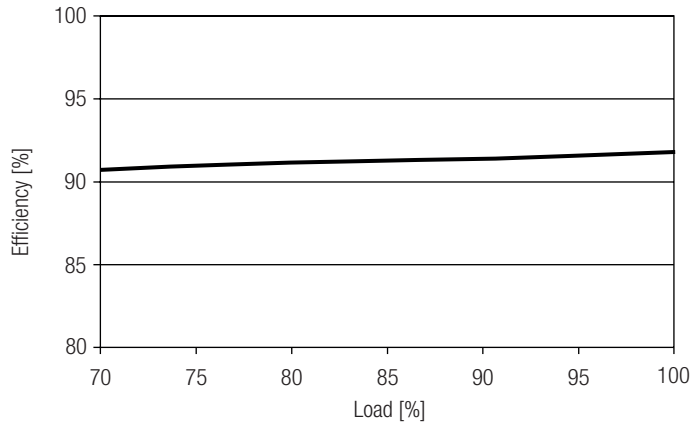


Power factor vs load

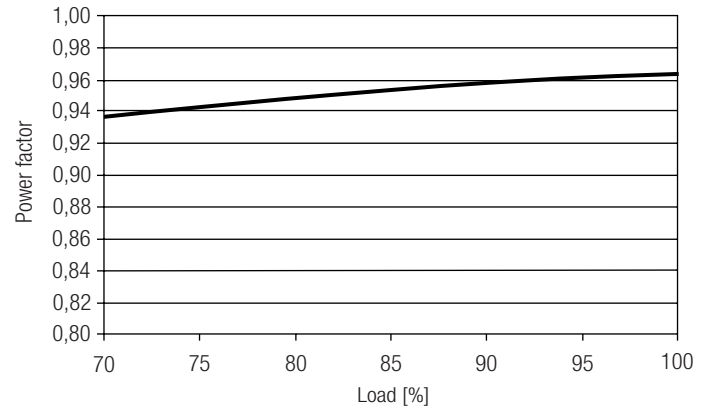


Input power vs load

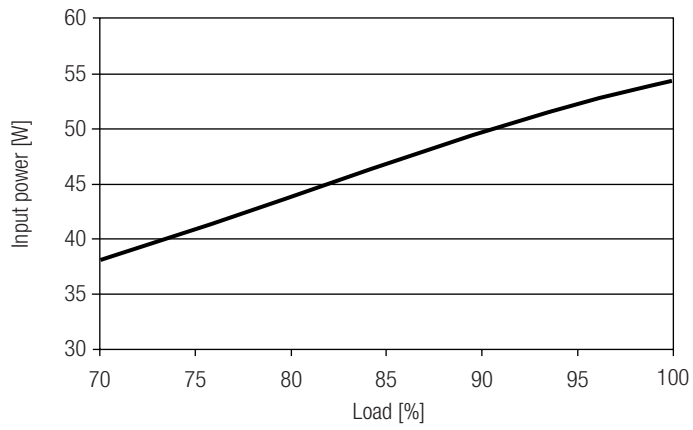

Input current vs load

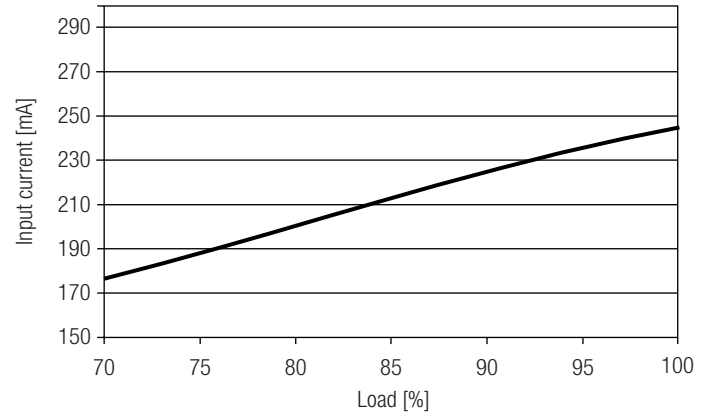


THD vs load

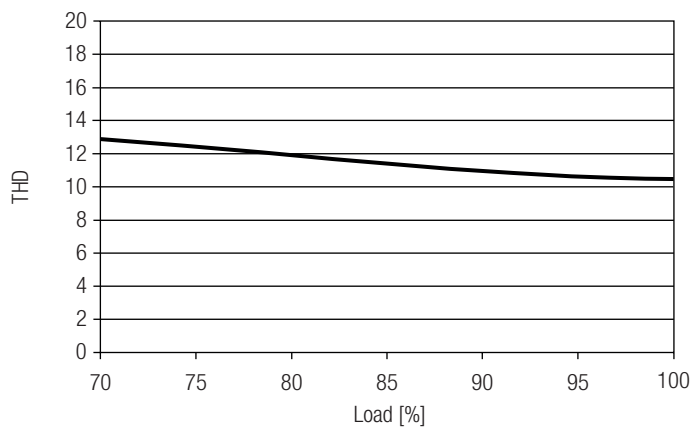


Diagrams LC 60W 700mA fixC C SNC


Efficiency vs load

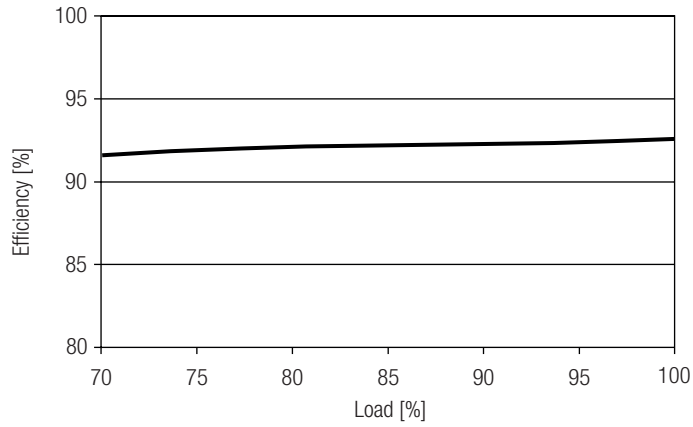


Power factor vs load

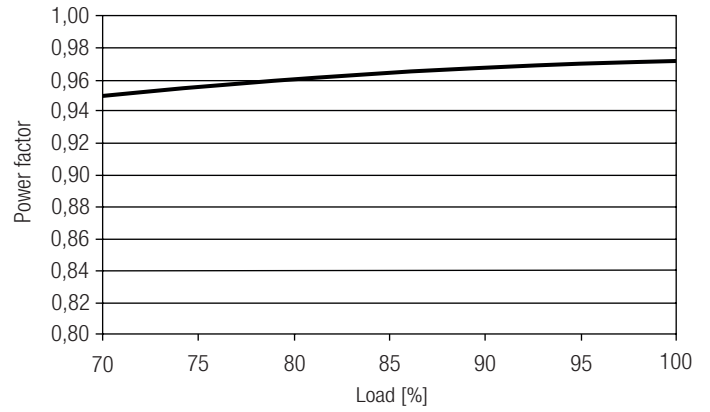


Input power vs load

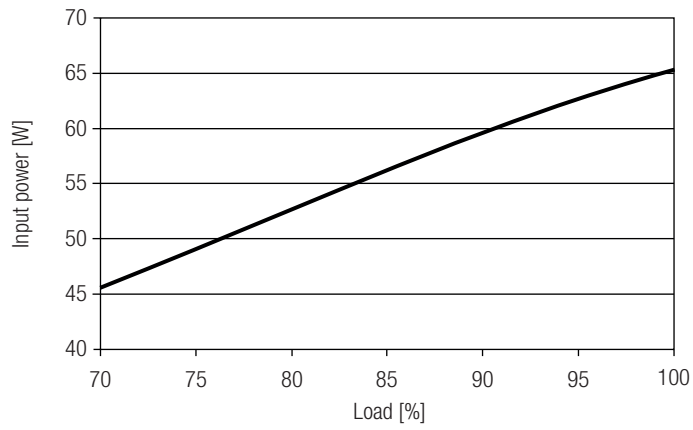

Input current vs load

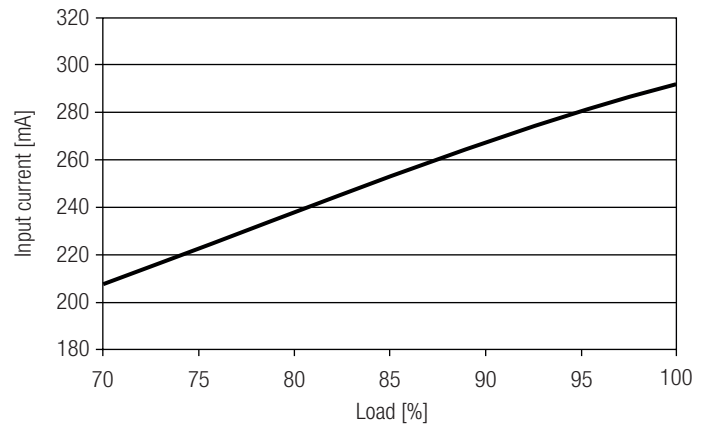


THD vs load

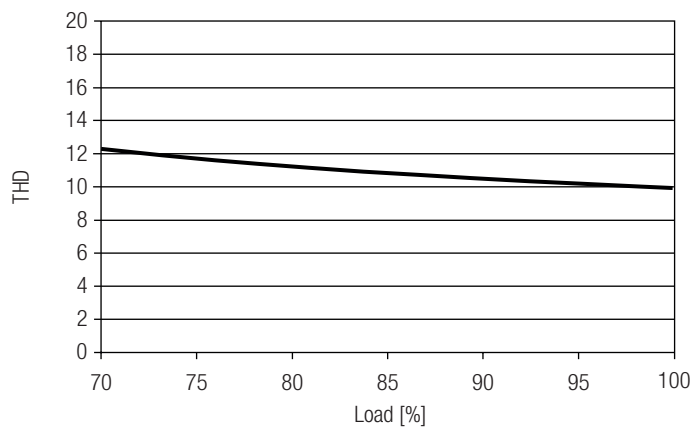


Diagrams LC 60W 1400mA fixC C SNC


Efficiency vs load

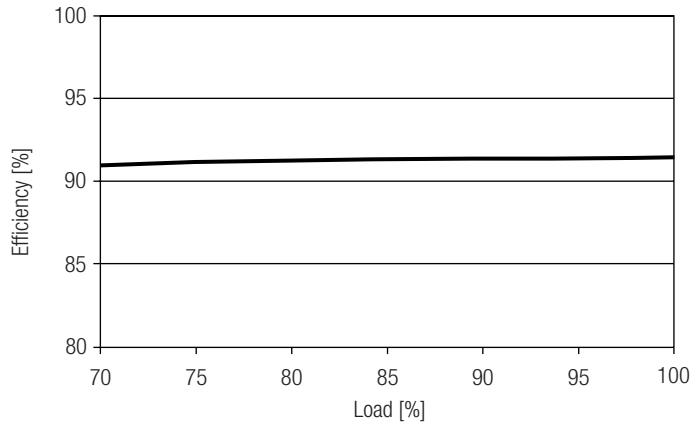


Power factor vs load

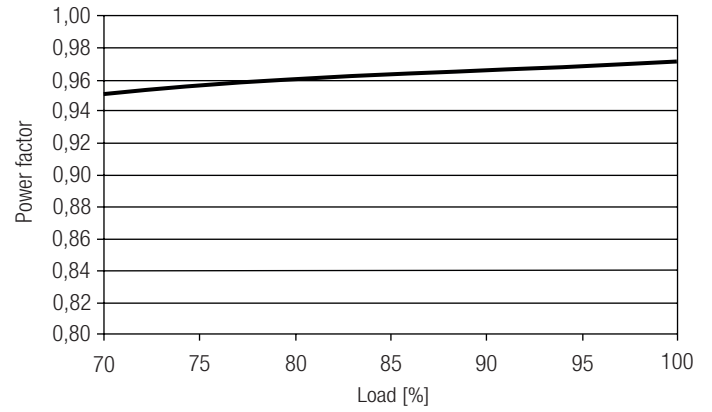


Input power vs load

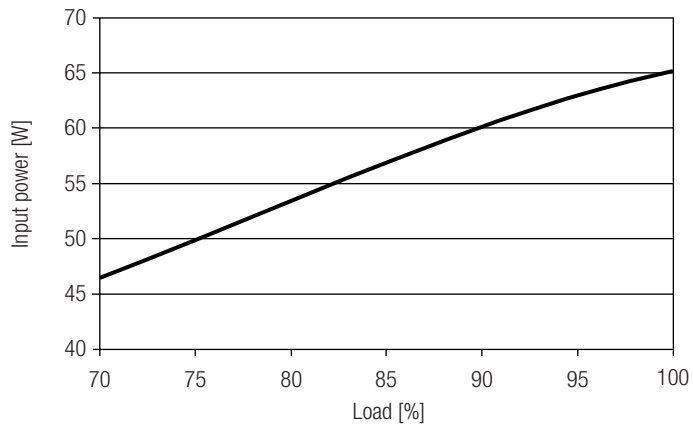

Input current vs load

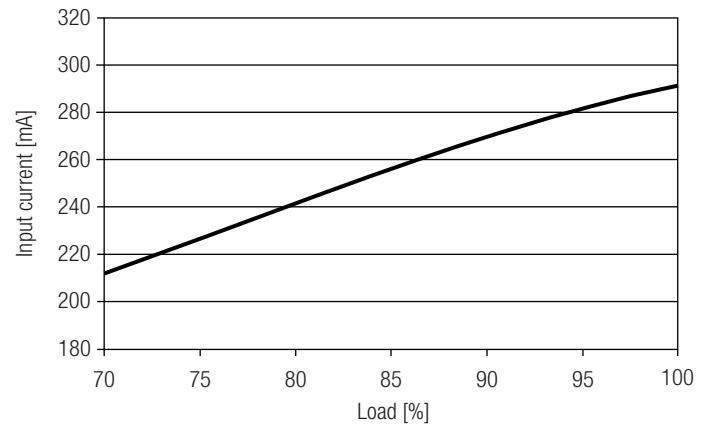

THD vs load

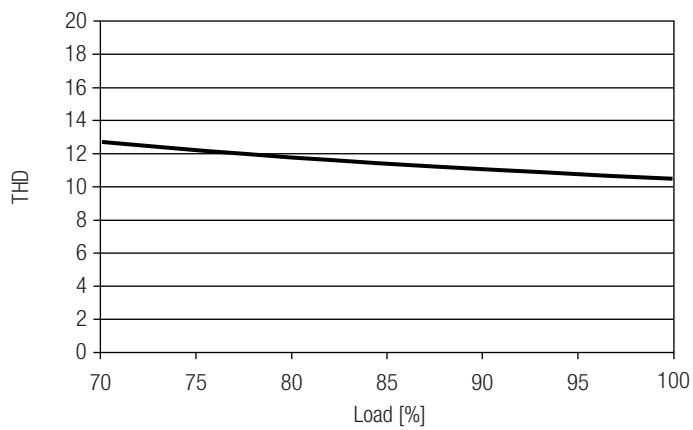

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Tridonic](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESM060W-1400-42](#) [PDA080B-1A0G](#)
[PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [LC 50W 200-350ML 170V FLEXC LP SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC 34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#) [HVG-320-48AB](#) [CNB50W-1200-42-CAS](#) [CNB30W-0600-42-CAS](#) [LCI 100W 1400MA TEC C](#) [LCI 100W 2100MA TEC C](#) [LCI 150W 1750MA TEC C](#) [LCI 150W 2100MA TEC C](#) [87500284](#) [87500447](#) [LC 50W 1200MA FIXC SR SNC](#) [87500554](#)