



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

DL4148
THRU
DL4448

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SWITCHING DIODES

VOLTAGE - 50 to 100 Volts

CURRENT - 0.15 to 0.2 Ampere

FEATURES


- * Silicon epitaxial planar diodes
- * Low power loss, high efficiency
- * Low leakage
- * Low forward voltage
- * High speed switching
- * High current capability

MECHANICAL DATA

- * Case: Glass sealed case
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.05 grams Approx.



Mini Melf(DL-35)



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS






Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	SYMBOL	DL4148	DL4150	DL4151	DL4448	UNITS
Maximum Recurrent Peak Reverse Voltage	V _R RM	100	50	75	100	V
Maximum Average Forward Current	I _F AV	150	200	150	150	mA
Maximum Power Dissipation Tamb=25°C	P _{tot}	500	500	500	500	mW
Maximum Forward Voltage	V _F @I _F	1.0/10	1.0/200	1.0/50	1.0/100	V/mA
Maximum Reverse Current	I _R @V _R	5000/75	100/50	50/50	5000/75	nA/V
Maximum Reverse Recovery Time	t _{rr}	4.0	4.0	2.0	4.0	nS
Repetitive Peak Forward Current	I _{FRM}	500				mA
Peak Forward Surge Current, tp = 1µS	I _{FSM}	2				A
Forward Continuous Current	I _F	300				mA
Typical Junction Capacitance	C _J	4.0				pF
Operating and Storage Temperature Range	T _J ,T _{STG}	-65 to +200				°C

RATING AND CHARACTERISTIC CURVES (DL4148 THRU DL4448)

REF: DL4148

A Admissible repetitive peak forward current versus pulse duration

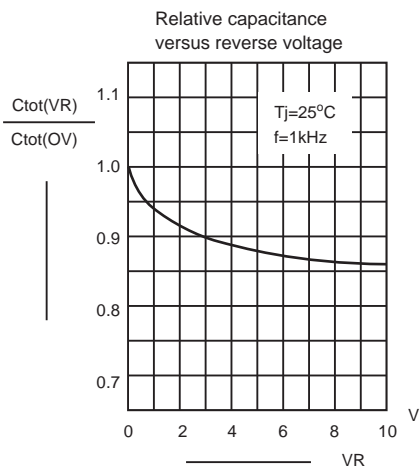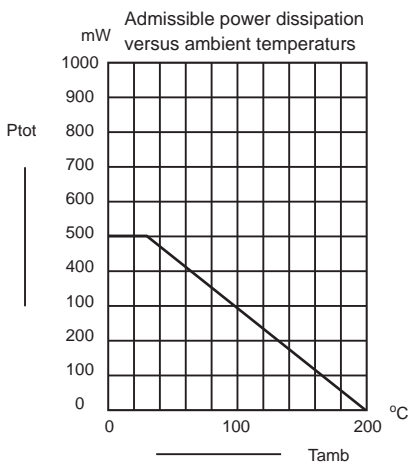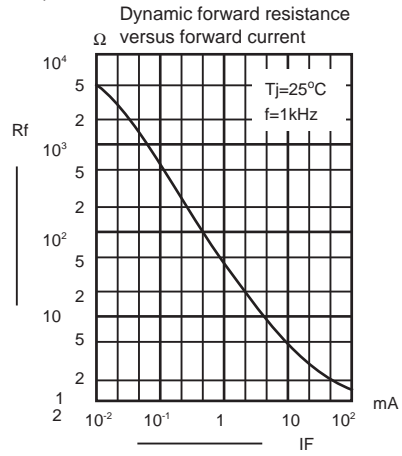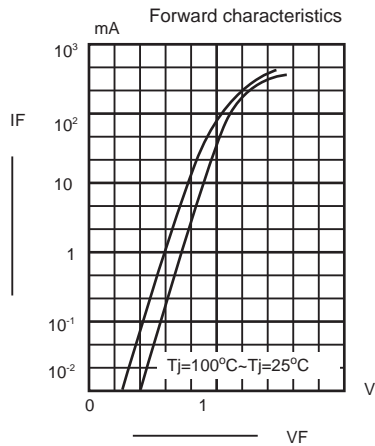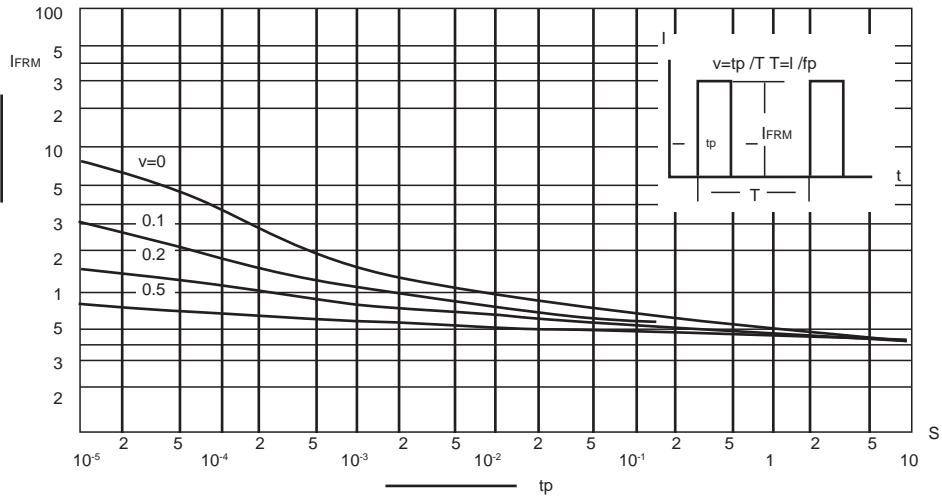

DC COMPONENTS CO., LTD.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [DC Components manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RGP30G-E373](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMBD7000LT3G](#) [1N4449](#) [1N4934-E3/73](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [BAW76-TR](#) [MM230L-CAA](#) [MMSD914-TP](#) [IDW40E65D1](#)