


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0461148401](#)
Status: **Active**
Overview: EXTreme LPHPower Connectors
Description: 1.27mm, 12.00mm Pitch, EXTreme LPHPower Receptacle Header, Vertical, Compliant Pin, 8 Power Contacts, 40 Signal Contacts, Select Gold (Au) Plating, without BMI Guides

Documents:

| | |
|--------------------------------------------------------------|------------------------------------------------------------------|
| 3D Model | Application Specification AS-46114-001-001 (PDF) |
| Drawing (PDF) | Packaging Specification PK-46114-003 (PDF) |
| Product Specification PS-46114-001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

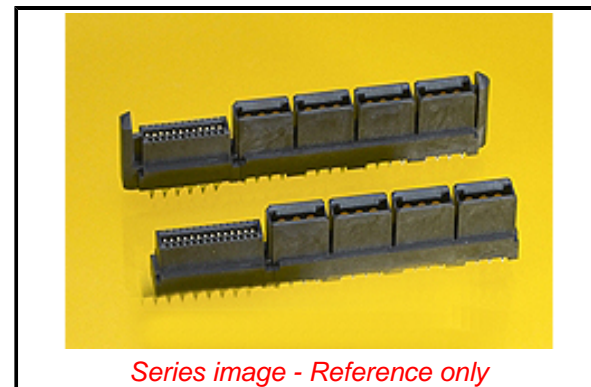

Agency Certification

| | |
|-----|---------|
| CSA | LR19880 |
| UL | E29179 |

General

| | |
|-------------------------------|---------------------------------------------|
| Product Family | PCB Receptacles |
| Series | 46114 |
| Application | Board-to-Board, Power |
| Application Tooling Part Link | 62100-6300 |
| Application Tooling Part Link | 62201-8671 |
| Comments | Press Fit Pin |
| Overview | EXTreme LPHPower Connectors |
| Product Name | EXTreme LPHPower |
| UPC | 756054923313 |

Physical

| | |
|--------------------------------|--------------------------------|
| (p)ower-(s)ignal Configuration | 8p - 40s |
| Circuits (Loaded) | 48 |
| Circuits (maximum) | 48 |
| Color - Resin | Black |
| Durability (mating cycles max) | 250 |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | None |
| Material - Metal | High Performance Alloy (HPA) |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 12.180/g |
| Number of Rows | 2 |
| Orientation | Vertical |
| PCB Locator | No |
| PCB Retention | None |
| Packaging Type | Tube |
| Pitch - Mating Interface | 1.27mm, 12.00mm |
| Pitch - Termination Interface | 1.27mm, 2.50mm |
| Plating min - Mating | 0.762µm |
| Plating min - Termination | 2.540µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |
| Temperature Range - Operating | -40° to +105°C |

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[46114 Series](#)

Mates With

[45985 EXTreme LPHPower Header](#)

Termination Interface: Style Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact 30.0A
Grounding to PCB No
Voltage - Maximum 250V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification AS-46114-001-001
Packaging Specification PK-46114-003
Product Specification PS-46114-001-001
Sales Drawing SD-46114-800

This document was generated on 11/01/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[1424439](#) [1424438](#) [09330062652](#) [2-8675P1](#) [580129-2](#) [605601-1](#) [6340G1](#) [6341G1](#) [6360G1](#) [6373G1](#) [6374g2](#) [6396G1](#) [647757-1](#) [66394-4](#)
[6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646348-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651778-1](#) [6651788-1](#) [696465-1](#) [696475-1](#) [73000005059](#) [73000005349](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#)
[765-16-0080B](#) [789.700-44](#) [789.700-54](#) [80-1010](#) [80-9](#) [827381-1](#) [829992-1](#) [902-77-02113](#) [PL00U-301-10D10](#) [PM103MOOLOO](#)
[PM16S1620S32-50](#) [PM212MOOLOO](#) [PM309FOOLOO](#) [PM324FOOLCH](#)