

LMI 48V 350–700mA 20–42V FO Slim

Fixed output

Product description

- Dimmable via potentiometer
- Up to 93 % efficiency
- Output voltage range 20 – 42 V
- Adjustable output current between 350 and 700 mA via DIP switch
- Output current tolerance $\pm 8\%$
- Max. tc point temperature 115 °C
- 5-year guarantee

Housing properties

- Pure PCB for built-in application
- Suitable for class III applications

Interfaces

- Terminal blocks: 0° push terminals
- Potentiometer equipped

Functions

- Adjustable output current
- Protective features (short-circuit, no-load)

Benefits

- Application-oriented operating window
- Small dimensions for miniaturization of luminaires
- Same form factor as DALI variant for easy design-in



Standards, page 4




LMI 48V 350-700mA 20-42V FO Slim

Fixed output

Technical data

DC voltage input	48 V
DC voltage range	46 – 50 V
Max. input power	32 W
Typ. efficiency (full load) ^①	93 %
Typ. input current in no-load operation	2.8 mA
Typ. input power in no-load operation	0.135 W
Time to light (full load)	< 0.6 s
Hold on time at power failure	< 5 ms
Output current tolerance ^②	± 8 %
Max. peak output current	≤ output current + 20 %
Output LF current ripple	same as LF ripple on 48 V bus
Max. output voltage (no-load voltage)	50 V
Surge voltage at output side (against PE)	same as on 48 V bus
ESD classification	Severity level 2
Max. tc point temperature	115 °C
Dimensions L x W x H	125 x 14.8 x 12.5 mm

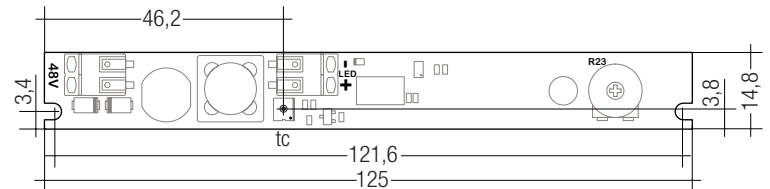

Ordering data

Type	Article number	Packaging box	Packaging carton (contains 10 boxes)	Packaging pallet	Weight per pc.
LMI 48V 350-700mA 20-42V FO Slim	28000947	5 pc(s).	50 pc(s).	3,000 pc(s).	0.016 kg

We recommend using following LCU DC power supply together with this LMI LED

Driver:

Type	Article number	Packaging carton	Packaging pallet	Weight per pc.
LCU 48V 75W DC-STR FO Ip	28000816	10 pc(s).	760 pc(s).	0.274 kg
LCU 48V 75W DC-STR FO SR	28001232	10 pc(s).	300 pc(s).	0.346 kg
LCU 48V 150W DC-STR FO Ip	28001234	20 pc(s).	600 pc(s).	0.340 kg
LCU 48V 150W DC-STR FO SR	28001045	10 pc(s).	300 pc(s).	0.365 kg

Specific technical data

Type	Output current	Min. forward voltage	Max. forward voltage	Max. output power (at 48 V, full load)	Typ. power consumption (at 48 V, full load)	Typ. current consumption (at 48 V, full load)
LMI 48V 350-700mA 20-42V FO Slim	350 mA	20 V	42 V	14.7 W	15.6 W	325 mA
	400 mA	20 V	42 V	16.8 W	17.9 W	372 mA
	450 mA	20 V	42 V	18.9 W	20.1 W	420 mA
	500 mA	20 V	42 V	21.0 W	22.4 W	467 mA
	550 mA	20 V	42 V	23.1 W	24.7 W	515 mA
	600 mA	20 V	42 V	25.2 W	27.0 W	563 mA
	650 mA	20 V	42 V	27.3 W	29.4 W	612 mA
	700 mA	20 V	42 V	29.4 W	31.7 W	660 mA

^① Depending on the selected output current.

^② Valid at 100 % dimming level.

1. Standards

EN 61347-1
EN 61347-2-13
EN 62384


2. Thermal details and life-time

2.1 Expected life-time

Life-time is limited by DC power supply.
Max. tp point temperature must not be exceeded.

3. Installation / wiring


3.1 Circuit diagram

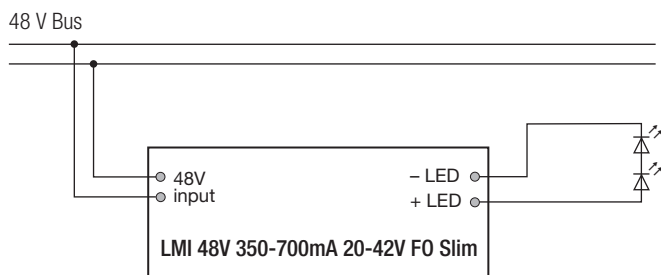

3.2 Wiring type and cross section

Solid or stranded wire with a cross section of 0.2 – 0.75 mm².
Strip 6 – 7 mm of insulation from the cables to ensure perfect operation of terminals.

LED module/LED Driver/supply



3.3 Wiring guidelines

- The 48 V cables should be run separately from the mains connections and mains cables to ensure good EMC conditions.
- The 48 V DC output wiring should be kept as short as possible to ensure good EMC. Tridonic did successfully EMC test with more than 30 m on grounded metal housings.
- For plastic housing reduce the cable length if the EMC get worse.
- The max. cable length, including track light, is limited only by voltage drop: The last LMI 48V in the track light must still supplied with minimum 46 V. More details in the voltage drop application note!
- Secondary switching is not permitted.
- To avoid the damage of the Driver, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).

3.4 Hot plug-in of LED module

Hot plug-in is not supported due to residual output voltage of > 0 V.
The LED Driver will not be damaged but there is a risk of destroying the LED module.

3.5 EOS/ESD safety guidelines




The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice.


For further information for EOS/ESD safety guidelines and the ESD classification please refer to the brochure entitled <http://www.tridonic.com/esd-protection>.

4. Electrical values

4.1 Operating window

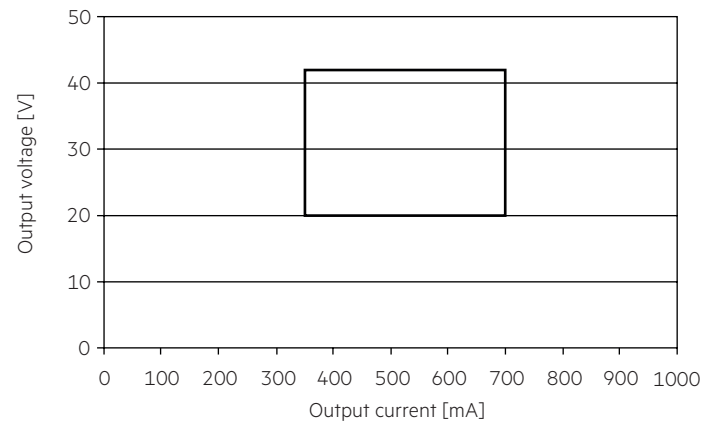

4.2 Efficiency vs load

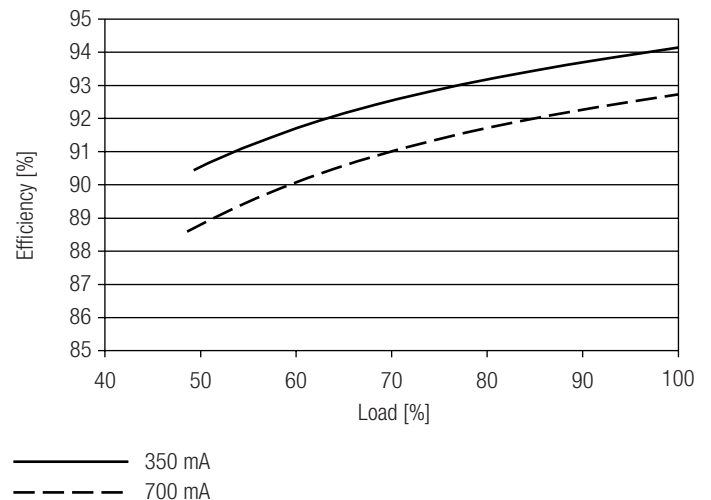

100 % load corresponds to the max. output power (full load) according to the table on page 2.

5. Functions

5.1 Adjustable current

The output current of the LED Driver can be adjusted in a certain range.

1. step: set current with on board dip switch S1-1 to S1-4
2. step: choose function fixed current or potentiometer with on board dip switch S1-5 and S1-6

Step 1 and 2 have to be done to configure LED Driver properly.

The factory default setting (no dip switch are set) is 325 mA \pm 20 %.
This is no normal operation.

	S1-1	S1-2	S1-3	S1-4	S1-5	S1-6
350 mA	OFF	OFF	OFF	ON	-	-
375 mA	OFF	OFF	ON	OFF	-	-
400 mA	OFF	OFF	ON	ON	-	-
425 mA	OFF	ON	OFF	OFF	-	-
450 mA	OFF	ON	OFF	ON	-	-
475 mA	OFF	ON	ON	OFF	-	-
500 mA	OFF	ON	ON	ON	-	-
Output current	525 mA	ON	OFF	OFF	OFF	-
	550 mA	ON	OFF	OFF	ON	-
	575 mA	ON	OFF	ON	OFF	-
	600 mA	ON	OFF	ON	ON	-
	625 mA	ON	ON	OFF	OFF	-
	650 mA	ON	ON	OFF	ON	-
	675 mA	ON	ON	ON	OFF	-
	700 mA	ON	ON	ON	ON	-
Function	Potentiometer	-	-	-	ON	OFF
	Fixed current	-	-	-	OFF	ON

If potentiometer function is used 100 % output current level can be set by on board dip switch.

With potentiometer current can be dimmed down to 70 mA (amplitude modulation only). Max. torque for potentiometer is 5 Ncm.

5.2 Short-circuit behaviour

In case of a short-circuit at the LED output the LED Driver will not be damaged. As soon as short-circuit is removed the LED Driver turns on. No restart is needed.

5.3 No-load operation

The LED Driver will not be damaged in no-load operation. The output will not be deactivated. Before a LED load is connected again turn off DC power supply.

6. Miscellaneous

6.1 Conditions of use and storage

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The LED Drivers have to be acclimatised to the specified temperature range (ta range of DC power supply) before they can be operated.

6.2 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Life-time declarations are informative and represent no warranty claim. No warranty if device was opened.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Tridonic](#) manufacturer:

Other Similar products are found below :

[PIFC-K250F](#) [PITB-K222A](#) [AC-A60VD24H2.5](#) [ALD-514012PJ134](#) [PWD-60-1-70-P](#) [ESS030W-1050-21](#) [BPOXL 4-12-035](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#) [ESS010W-0500-12](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [HVG-240-54AB](#) [OTE 25/220-240/700 PC](#) [OT FIT 30/220-240/700 CS](#) [DAL30W-0600-42-T](#) [HVG-320-48AB](#) [CNB30W-0600-42-CAS](#) [87500757](#) [I-SELECT 2 PLUG 2100MA BL](#) [LCU 48V 75W DC-STR FO](#) [LC 45 W 500-1400 MA FLEXC SC EXC](#) [I-SELECT 2 PLUG 2000MA BL](#) [LC 50/200-350/170 FLEXCC LP SNC3](#) [LCO 14/100-500/38 O4A NF C EXC3](#) [LC 28W 300-700MA 42 FLEXC NF SC EXC3](#) [LC 44/1050/42 FIXC SRL ADV2](#) [LCA 60W 900-1750MA ONE4ALL C PRE](#) [LC 8/180/44 FIXC SR SNC2](#) [LC 19/200-350/54 FLEXC LP SNC4](#) [BXDR-PS-75BS-E116D-01-A](#) [LC 30/500/54 FIXC SR SNC2](#) [LCA 60W 24V ONE4ALL SC PRE SP](#) [LC 60W 75-330MA 310V FLEXC NF H16 EXC4](#) [LC 8/180/42 FIXC PC SR SNC2](#) [LC 10/350/29 FIXC SR SNC2](#) [LC 25/500/43 FIXC SR SNC2](#) [LC 50/100-400/140 PO4A NF H16 PRE3](#) [LC 25/600/42 FIXC SRL ADV2](#) [LCO 24/200-1050/39 NF C ADV3](#) [ELEMENT 35/220...240/900 G3](#) [LC 25W 350-1050MA FLEXC SR EXC](#) [LC 35W 24 ONE4ALL IP PRE](#) [BXDR-PS-25BS-E107D-01-A](#) [LC 17W 250-700MA FLEXC SR EXC](#) [LC 15W 350MA FIXC C SNC](#) [LC 14W 700MA FIXC PC SR SNC2](#) [LC 200W 24V SC SNC](#)