



### FEATURES


- Rapid prototyping of 2-port microwave circuits
- Compatible with all MB series circuit boards
- Cascade two boards into one housing
- SMA female connectors
- Ground terminal and bias feed-through
- Cover and mounting hardware provided

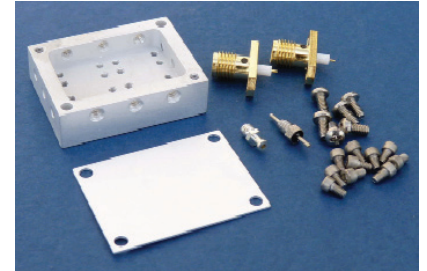

The MicroAmp MH-2 housing will accommodate two MB series circuit board to create a completely shielded 2-port circuits. Boards are available for microwave amplifiers, filters, log detectors, frequency multipliers, dividers, and operational amplifiers that can be cascaded together in a single housing to create more complex circuits. After assembling the desired MB circuit boards, simply drop them board into the housing cavity and screw the boards in place using #1-72 socket head cap screws with a 0.050" hex key. Join the two circuits together using a small bridge wire, foil ribbon, zero-ohm resistor, or capacitor. Then insert the SMA connectors into the side walls and secure them with #2-56 mounting screws and solder the center pins to the circuit board pads. The ground turret terminal and 1000 pf bias feed-through are then installed into the housing side wall and the bias connection is soldered in place from the circuit boards to the feed-through pin using a small gauge wire. Install the feed-through carefully with just enough torque (2 in-lbs max) to secure it in place. A cover attaches to the top of the housing with #2-56 screws to complete the shielded assembly. The finished housing can be mounted to a baseplate using the corner through holes.

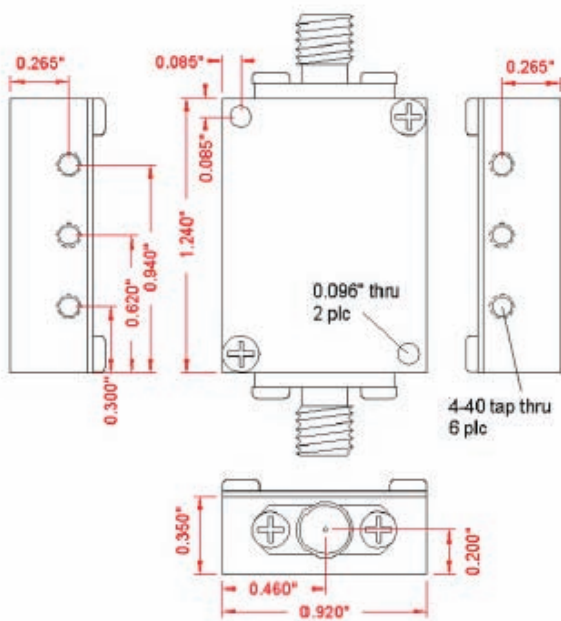

OUTLINE DRAWING

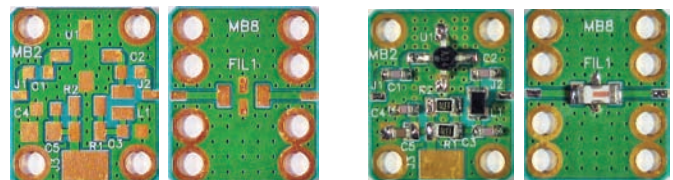

1. Select Circuit Board

2. Assemble Board



3. Install into Housing



4. Add Connectors and Bias

### MH-2 KIT CONTENTS

- 1 ea. Housing
- 1 ea. Cover
- 2 ea. SMA female connectors
- 1 ea. Feed-through bias pin
- 1 ea. Ground turret terminal
- 6 ea. #2-56 x 3/16" pan head screws
- 10 ea. #1-72 x 1/8" socket head cap screws

For additional product information, please visit [www.twinind.com](http://www.twinind.com)

Contact information: 925-866-8946 (phone) 925-866-8937 (fax) Sales@twinind.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Component Kits](#) category:*

*Click to view products by [Twin Industries](#) manufacturer:*

Other Similar products are found below :

[T107/C](#) [5210211](#) [KIT-ENERGY HARVEST](#) [KIT PROTO SHIELDS](#) [GSK-1004](#) [G30-7100](#) [G10-7100](#) [G30-8000](#) [BOX3-1455L-BK](#) [4504](#)  
[B03-7100](#) [B04-7100](#) [B05-7100](#) [2450L/C603D](#) [5500L/C402D](#) [L201DC](#) [L/C-201DL](#) [L/C-805DS](#) [KBOX1-AC-SV-PR2H](#) [L/C-603DS](#)  
[RGCBNJ660P22](#) [B10-8000](#) [B20-7100](#) [B45-8000](#) [MH-1](#) [MH-2](#) [TW-E41-1020](#) [TW-E41-1060](#) [B04-8000](#) [B03-8000](#) [G10-8000](#) [KBOX3-AL-](#)  
[SV-POW](#) [B05-8000](#) [G20-7100](#) [GSK-820](#) [GSK-1001](#) [GSK-944](#) [GSK-409](#) [GSK-918](#) [JRG01-EXP2](#) [JRG01-EXP1](#) [G20-8000](#) [977990](#)  
[CCAUTO-LAB1](#) [CC-LAB2](#) [JRG01-KIT](#) [JRG01-PARTS](#) [JRG01-PCB](#) [6002-240-001](#) [GSC-DL020](#)