



**A modern compact electronic totalizer . . . self-powered with 8 large LCD figures and choice of unidirectional or bidirectional models**

Specific Models



The MITE Series is a versatile family of LCD totalizers that includes unidirectional and bidirectional models. Based on the latest CMOS circuitry, they feature a long-life internal power source, high count-speed capability, and eight-digit liquid crystal display. The bidirectional MITE totalizer provides count/direction operation – one input receives count pulses, while a second input controls counting direction.

- Front panel and remote reset
- NEMA-4/IP65 environmental sealing
- Easy-to-read, high contrast Liquid Crystal Display (LCD)
- UL recognized
- 10-year battery life
- Quick and easy panel mounting with slide-on clips
- Supplied with prewired plug-in connector
- Accessory snap-on adaptors for high voltage count signals
- Small overall size – minimal 1.2" (30mm) depth behind panel
- Very low priced – without sacrifice of performance or reliability

MITE totalizers are rated NEMA-4/IP65 for water and dust-proof integrity of their front panels when mounted with the provided gasket. Instant reset to zero is accomplished via its front panel push-button or remote-reset command. For non-reset applications, the panel reset can be disabled.

**For selectable decimal point or input scaling, see Series A103**  
**For heavy duty construction, see Series 7997**

**SPECIFICATIONS**

- Display:** 7 mm character height; eight-digit LCD
- Power:** Internal lithium battery; Ten-year typical life
- Operating Temperature:** +14° to +144 °F (–10° to +60°C)
- Storage Temperature:** +4° to +144 °F (–20° to +60°C)
- Environmental Integrity:** Front panel meets NEMA-4/IP65 requirements, when used with clip mount and gasket provided
- Reset:** Front panel push-button and remote reset; Panel Reset Enable: Link to common to enable front-panel reset button; Remote Reset: Provides reset via remote contact closure or open collector transistor
- Connection:** Integral plug; Mating connector provided; Accessory screw termination available

**Signal Inputs for 79998D-110:**

**High-Speed Input:** For use with logic level voltage, TTL, CMOS open collector NPN transistor

*Frequency Response:* 10,000 Hz, 50 µsec minimum pulse length.  
*Input Voltage:* Logic 0: <0.7 volts DC; Logic 1: >2.4 volts DC;  
Maximum Input: 18 volts DC; NOTE: Accessory modules may be used for high voltage input signals

**Low-speed Input:** For use with isolated switch/relay contact.  
*Frequency Response:* 30 Hz maximum

**Signal Input for 79998D-410 (Bidirectional Totalizer):** To be used only with electronic inputs, TTL/CMOS compatible

*Frequency:* 10 kHz maximum, minimum pulse length 50 µsec.  
*Input Voltage:* Logic 0: <0.7 volts DC; Logic 1: >2.4 volts DC;  
Maximum input: 18 volts DC

*Direction Input:* Add: No connection; Subtract: Connect to common

**Approvals:** CE; UL recognized


Model No.	Description
079998D-110	MITE Totalizer
079998D-410	MITE Totalizer, Add/Subtract

**ACCESSORIES**

**AC/DC Input Module:** Allows use of high voltage input signal of 5 to 240 VAC/DC. Impulse frequency is 0 to 18 Hz. Connections are via screw terminations. Part Number 108938-0001

**Screw Terminal Adaptor:** Provides the convenience of screw terminal connection of input signal and remote reset. Part Number 108937-0001

**Dimensions:**

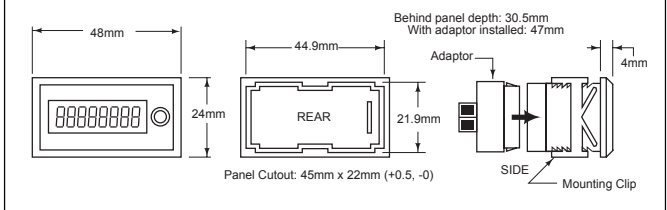

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [veeder root](#) manufacturer:*

Other Similar products are found below :

[0166726-006](#) [0195316-051](#) [0116425-007](#) [0149000-101](#) [RFMT00R](#) [RFMV00](#) [RFXDC10](#) [RFXP10](#) [RFXS00](#) [RFXT00](#) [C346-0411](#) [C346-0422](#) [C628-20052](#) [C628-20300](#) [C628-40050](#) [C628-41002](#) [C628-41300](#) [C628-81002](#) [C628-90000](#) [S628-20300](#) [A103-A14](#) [RFMSK00](#) [RFMT00](#) [RFMV00R](#) [RFXD00](#) [RFXD10](#) [RFXS10](#) [C342-1562](#) [C346-0513](#) [C628-20000](#) [C628-20002](#) [C628-21350](#) [C628-40000](#) [C628-40002](#) [C628-40052](#) [C628-41302](#) [C628-51002](#) [C628-60002](#) [0317680-001](#) [0703006-003](#) [0726845-001](#) [0727245-001](#) [0743425-003](#) [0743425-005](#) [0744386-211](#) [0745815-001](#) [0779526-201](#) [0779565-216](#) [0727235-001](#) [0743045-001](#)