

6. Battery charger is fused (2 spares included). The fuse will break and the charger will be switched off upon - Short Circuit, Overload or Reverse Polarity. Simply change the "blade" style fuse to restart charging.
7. To disconnect the battery when charged, switch off the mains supply and unplug. Caution: Because of risk of explosive gas, only disconnect the crocodile clips when the mains are disconnected. Check the fluid levels and top up if necessary and wipe the battery clean. If the battery has been removed, replace in the vehicle and re-connect.


Product Specifications:

Volt Polska Part Number: A1206LX

Voltage Rating Input: 240V, 50Hz - 65W

Output Rating: 12V - 3.5 ADC equal to 6Amps RMS

6V - 3.5 ADC equal to 6Amps RMS

The WEEE symbol  on this product means that this product should be ethically dismantled or recycled to minimise environmental impact. Please check with your local authority for more information.

IMPORTANT:

NOT intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they are supervised or have been given instruction concerning use of the Battery Charger by a person responsible for their safety.

FOR INDOOR USE ONLY

Importer

VOLT POLSKA SP. Z O.O.
UL. GRUNWALDZKA 76
81-771 SOPOT

WWW.VOLTPOLSKA.PL



6/12Volt 6Amp Automatic Battery Charger

VOLT POLSKA

www.voltpolska.pl



Part No.	Rated Output	Battery Voltage	Battery Capacity
A1206LX	6Amp	6/12 Volt	20-80 Ah

Please read these instructions carefully before operating this battery charger.

Battery Maintenance:

Please check your battery regularly throughout the year and especially in the winter.

Faulty cells can cause problems with your battery, check the cells with a hydrometer, if any cell is reading lower than the others it can indicate a faulty cell. If this is the case have your battery checked, as you may need a new battery. It is possible that a battery may appear flat when it could simply be a loose connection of the battery terminals. Check the terminals and tighten if necessary then check the battery again.



Safety Instructions: FOR INDOOR USE ONLY.

To enable safe operation of this battery charger, make sure you follow basic safety principles to reduce a risk of personal injury, electric shock and fire.

Always ensure the battery charger is kept in a dry place to avoid damage, and store out of the reach of children. Do not use the charger in damp or wet areas as moisture will damage the transformer.

Always check the battery chargers plug, cables and crocodile clips before use. Do not open the charger, there are no serviceable parts.

When charging, the liquid in the battery may bubble causing a release of gas, this is flammable so always operate the charger in a well ventilated place and away from naked flames and sparks.

These chargers are only suitable for 6/12 Volt Lead-Acid batteries and should not be used to recharge NICAD or any other type of battery.

DANGER: Avoid getting battery acid (electrolyte) on your skin or clothing, as it may cause burns. If this occurs rinse immediately with cold water and if necessary seek medical advice.

The charger contains a temperature-sensitive switch that automatically cuts off when the charger is overloaded or becomes excessively hot. The charger will switch back on after the unit has cooled.

Operating Instructions:


Please read the information on the front of these instructions for the maximum battery capacity recommended for use with this charger. Using with batteries smaller than this capacity may lead to damage to your battery.

1. Disconnect the Battery from the vehicle to avoid damage to the alternator. It is advisable were possible to remove the battery from the vehicle as spillage from the battery can cause damage.

2. If you have a maintenance free/sealed battery it is not necessary to carry out the following checks. Carefully remove all the caps from each battery cell, and ensure the liquid is at the recommended level. Top up with distilled or de-ionised water if required (ALWAYS wear protective gloves as this liquid is corrosive). Tap water should NOT be used under any circumstances, allow time for any gases to escape before replacing the caps. Warning: if your battery is the AUTOFIL type, manufactured by Dagenite or Exide, the glass balls and the long filler cap MUST be left in place during charging.
3. DO NOT plug the charger in until you have connected the crocodile clips correctly.
4. Connect the crocodile clips in the following order.
 - a) Connect positive (+ Red) charging lead to positive (+Red) terminal.
 - b) Connect negative (- Black) charging lead to negative (-Black) terminal.
 It is important that the clips are making good contact with the battery terminals.

IMPORTANT OPERATING INFO:

5. Plug the Charger in using the mains plug, Select the voltage of the battery you are charging 6V or 12V by pressing the required button. Turn ON the battery charger, the RED (power) LED should illuminate. The 3 step charging process starts, the % LED's will ALL illuminate, as the charging progresses the LED's will go OUT until the battery reaches 100% (NO % LED's lit) the time for this will vary depending on the condition of the battery (around 4-6 hours approx). The battery can remain connected at this point, the battery charger AUTOMATICALLY switches to a FLOAT/MAINTENANCE current preventing over-charging. However it is NOT recommended to charge the battery for more than 24hrs.

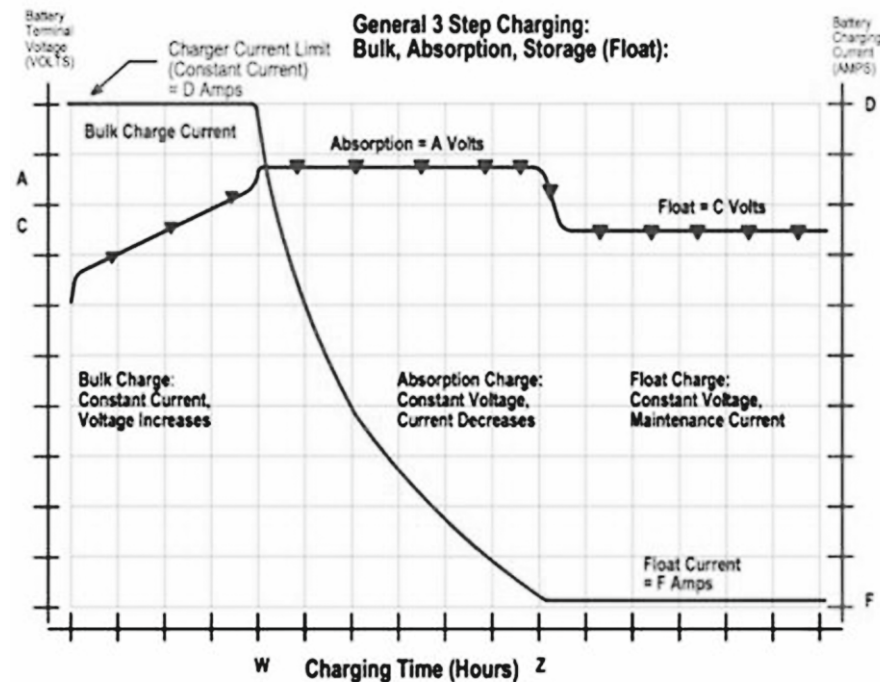

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Adapters category](#):

Click to view products by [VOLT POLSKA manufacturer](#):

Other Similar products are found below :

[GP ECO B421 + 4XAA RECYKO 2100](#) [GP ECO B421 + 4XAA RECYKO 2700](#) [GP ECO E211 + 2XAA RECYKO 2100](#) [PB2S BLUE PD45II](#) [GP ECO M451 + 4XAA RECYKO 2700](#) [GP E411 + 4 X R6 2100 RECYKO](#) [CABLE-3/CL](#) [EPA1020-075](#) [EPA1206PRO](#) [CABLE-2/CL](#) [6PRMOBI06S](#) [6PRO122420](#) [CABLE-1/CL](#) [POLOLU MICROSD ADAPTER](#) [GROVE CAPE FOR BEAGLEBONE](#) [GROVE BREAKOUT FOR LINKIT SMART 7688 DUO](#) [RBFN-EU-SEN-BMT-12](#) [11293](#) [9127](#) [9546](#) [9755](#) [9983](#) [OKY1201](#) [OKY1204](#) [I2C HUB DUAL MAX14870 MOTOR DRIVER SHIELD](#) [AB-12.100/ST8VA](#) [BC-20 PRO 20A 12V](#) [BC4](#) [BQ-CC65](#) [CL12.6VDC-1.5A](#) [CL12.6VDC-2.5A](#) [CL12.6VDC-4.76A](#) [CL8.4VDC-1.2A](#) [CL8.4VDC-2.5A](#) [CL8.4VDC-5A](#) [EP12M248L](#) [GM3A](#) [GP 2XP861 + 8X2100 RECYKO DOK](#) [GP ECO B421 + 4XAA RECYKO 2100 + D451](#) [GP P461 + 4 X 2100 RECYKO DOK](#) [GP PRO P461 + 4XAA RECYKO 2100](#) [LIFEPO4-12.8V-5A](#) [LIFEPO4-38.4-5A](#) [LI-ION-11.1V-5A](#) [LI-ION-14.8V-10A](#) [LI-ION-14.8V-5A](#) [LI-ION-14.8V-8A](#) [LI-ION-25.9V-2A](#)