



for switching and interface circuit and
drive circuit applications

Resistor Values

Type	R1 (K)	R2 (K)	Marking
MMUN2211	10	10	A8A
MMUN2212	22	22	A8B
MMUN2213	47	47	A8C
MMUN2214	10	47	A8D
MMUN2215	10	∞	A8E
MMUN2216	4.7	∞	A8F
MMUN2230	1	1	A8G
MMUN2231	2.2	2.2	A8H
MMUN2232	4.7	4.7	A8J
MMUN2233	4.7	47	A8K
MMUN2234	22	47	A8L
MMUN2235	2.2	47	A8M
MMUN2238	2.2	∞	A8R
MMUN2241	100	∞	A8U



1.Base 2.Emitter 3.Collector
SOT-23 Plastic Package

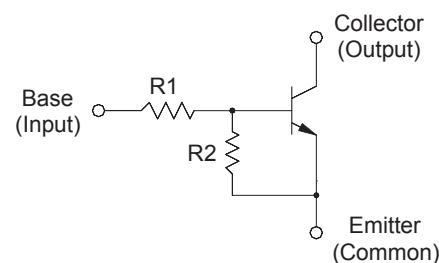

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	50	V
Collector Emitter Voltage	V_{CEO}	50	V
Collector Current	I_C	100	mA
Total Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_s	- 55 to + 150	°C

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 10 \text{ V}$, $I_C = 5 \text{ mA}$	h_{FE}	35	-	-
MMUN2211	h_{FE}	60	-	-
MMUN2212	h_{FE}	80	-	-
MMUN2213	h_{FE}	80	-	-
MMUN2214	h_{FE}	160	-	-
MMUN2215	h_{FE}	160	-	-
MMUN2216	h_{FE}	160	-	-
MMUN2230	h_{FE}	3	-	-
MMUN2231	h_{FE}	8	-	-
MMUN2232	h_{FE}	15	-	-
MMUN2233	h_{FE}	80	-	-
MMUN2234	h_{FE}	80	-	-
MMUN2235	h_{FE}	80	-	-
MMUN2238	h_{FE}	160	-	-
MMUN2241	h_{FE}	160	-	-
Collector Base Cutoff Current at $V_{CB} = 50 \text{ V}$	I_{CBO}	-	100	nA
Collector Emitter Cutoff Current at $V_{CE} = 50 \text{ V}$	I_{CEO}	-	500	nA
Emitter Base Cutoff Current at $V_{EB} = 6 \text{ V}$	I_{EBO}	-	0.5	mA
MMUN2211	I_{EBO}	-	0.2	mA
MMUN2212	I_{EBO}	-	0.1	mA
MMUN2213	I_{EBO}	-	0.2	mA
MMUN2214	I_{EBO}	-	0.9	mA
MMUN2215	I_{EBO}	-	1.9	mA
MMUN2216	I_{EBO}	-	4.3	mA
MMUN2230	I_{EBO}	-	2.3	mA
MMUN2231	I_{EBO}	-	1.5	mA
MMUN2232	I_{EBO}	-	0.18	mA
MMUN2233	I_{EBO}	-	0.13	mA
MMUN2234	I_{EBO}	-	0.2	mA
MMUN2235	I_{EBO}	-	4	mA
MMUN2238	I_{EBO}	-	0.1	mA
MMUN2241	I_{EBO}	-	-	-
Collector Base Breakdown Voltage at $I_C = 10 \mu\text{A}$	$V_{(BR)CBO}$	50	-	V
Collector Emitter Breakdown Voltage at $I_C = 2 \text{ mA}$	$V_{(BR)CEO}$	50	-	V
Collector Emitter Saturation Voltage at $I_C = 10 \text{ mA}$, $I_B = 0.3 \text{ mA}$	V_{CEsat}	-	0.25	V
at $I_C = 10 \text{ mA}$, $I_B = 5 \text{ mA}$	V_{CEsat}	-	0.25	V
at $I_C = 10 \text{ mA}$, $I_B = 1 \text{ mA}$	V_{CEsat}	-	0.25	V
MMUN2230	V_{CEsat}	-	0.25	V
MMUN2231	V_{CEsat}	-	0.25	V
MMUN2215	V_{CEsat}	-	0.25	V
MMUN2216	V_{CEsat}	-	0.25	V
MMUN2232	V_{CEsat}	-	0.25	V
MMUN2233	V_{CEsat}	-	0.25	V
MMUN2234	V_{CEsat}	-	0.25	V
MMUN2235	V_{CEsat}	-	0.25	V
MMUN2238	V_{CEsat}	-	0.25	V

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Output Voltage (on) at $V_{CC} = 5 \text{ V}$, $V_B = 2.5 \text{ V}$, $R_L = 1 \text{ k}\Omega$	V_{OL}	-	0.2	V
MMUN2211	V_{OL}	-	0.2	V
MMUN2212	V_{OL}	-	0.2	V
MMUN2214	V_{OL}	-	0.2	V
MMUN2215	V_{OL}	-	0.2	V
MMUN2216	V_{OL}	-	0.2	V
MMUN2230	V_{OL}	-	0.2	V
MMUN2231	V_{OL}	-	0.2	V
MMUN2232	V_{OL}	-	0.2	V
MMUN2233	V_{OL}	-	0.2	V
MMUN2234	V_{OL}	-	0.2	V
MMUN2235	V_{OL}	-	0.2	V
MMUN2238	V_{OL}	-	0.2	V
at $V_{CC} = 5 \text{ V}$, $V_B = 3.5 \text{ V}$, $R_L = 1 \text{ k}\Omega$	V_{OL}	-	0.2	V
at $V_{CC} = 5 \text{ V}$, $V_B = 5 \text{ V}$, $R_L = 1 \text{k}\Omega$	V_{OL}	-	0.2	V
MMUN2241	V_{OL}	-	0.2	V
Output Voltage (off)				
at $V_{CC} = 5 \text{ V}$, $V_B = 0.5 \text{ V}$, $R_L = 1 \text{k}\Omega$	V_{OH}	4.9	-	V
at $V_{CC} = 5 \text{ V}$, $V_B = 0.05 \text{ V}$, $R_L = 1 \text{k}\Omega$	V_{OH}	4.9	-	V
at $V_{CC} = 5 \text{ V}$, $V_B = 0.25 \text{ V}$, $R_L = 1 \text{k}\Omega$	V_{OH}	4.9	-	V
MMUN2230	V_{OH}	4.9	-	V
MMUN2215	V_{OH}	4.9	-	V
MMUN2216	V_{OH}	4.9	-	V
MMUN2233	V_{OH}	4.9	-	V
MMUN2238	V_{OH}	4.9	-	V
Input Resistor	MMUN2211	R1	7	$\text{k}\Omega$
	MMUN2212	R1	15.4	$\text{k}\Omega$
	MMUN2213	R1	32.9	$\text{k}\Omega$
	MMUN2214	R1	7	$\text{k}\Omega$
	MMUN2215	R1	7	$\text{k}\Omega$
	MMUN2216	R1	3.3	$\text{k}\Omega$
	MMUN2230	R1	0.7	$\text{k}\Omega$
	MMUN2231	R1	1.5	$\text{k}\Omega$
	MMUN2232	R1	3.3	$\text{k}\Omega$
	MMUN2233	R1	3.3	$\text{k}\Omega$
	MMUN2234	R1	15.4	$\text{k}\Omega$
	MMUN2235	R1	1.54	$\text{k}\Omega$
	MMUN2238	R1	1.54	$\text{k}\Omega$
	MMUN2241	R1	70	$\text{k}\Omega$
Resistor Ratio	MMUN2211/MMUN2212/MMUN2213	R1/R2	0.8	1.2
	MMUN2214	R1/R2	0.17	0.25
	MMUN2215/MMUN2216/MMUN2238	R1/R2	-	-
	MMUN2241	R1/R2	-	-
	MMUN2230/MMUN2231/MMUN2232	R1/R2	0.8	1.2
	MMUN2233	R1/R2	0.055	0.185
	MMUN2234	R1/R2	0.38	0.56
	MMUN2235	R1/R2	0.038	0.056

Typical Characteristics

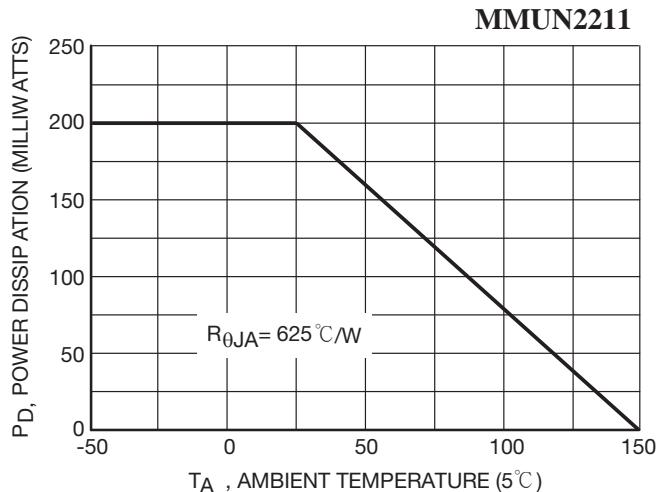


Figure 1. Derating Curve

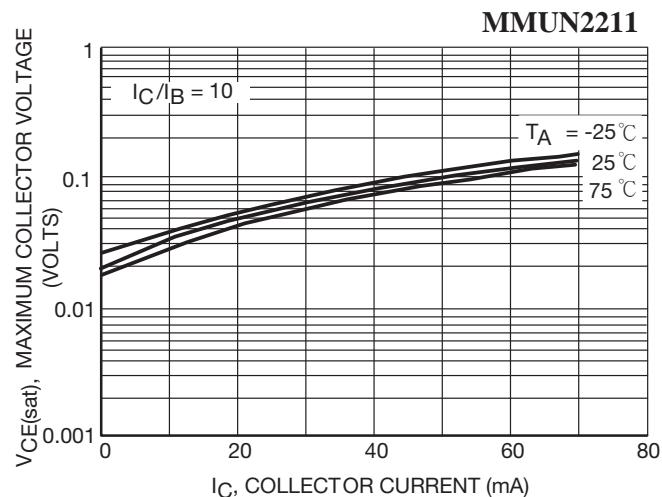


Figure 2. $V_{CE(\text{sat})}$ vs. I_C

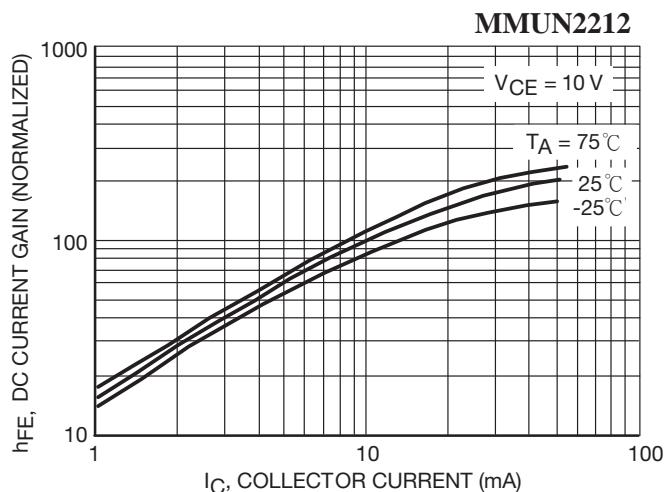


Figure 3. DC Current Gain

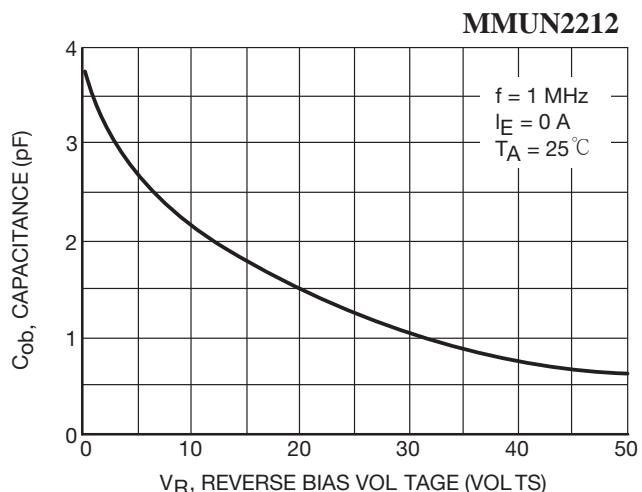


Figure 4. Output Capcitance

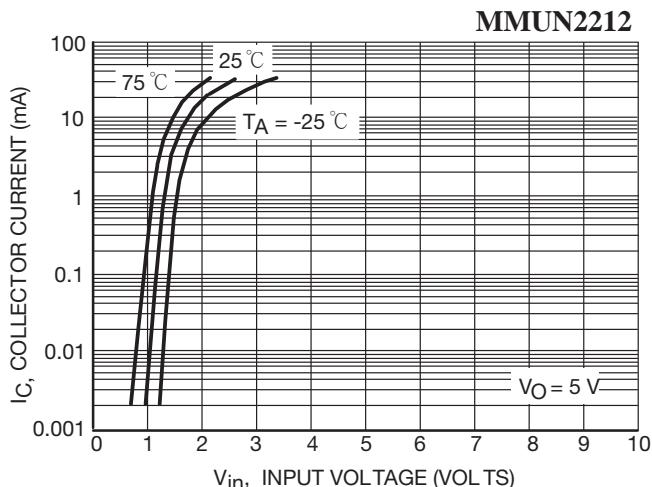


Figure 5. Output Current vs. Input Voltage

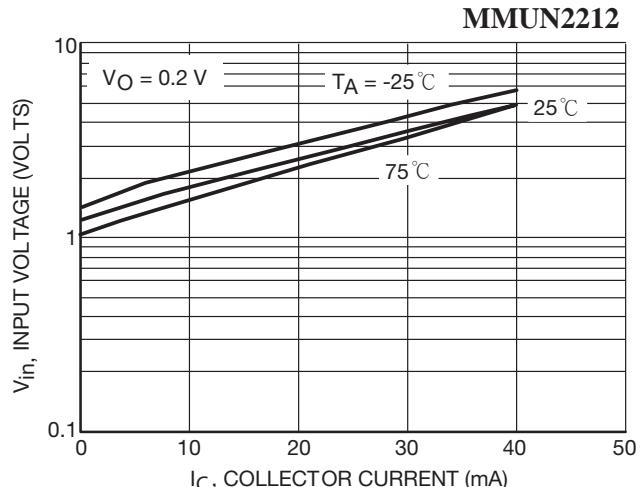


Figure 6. Input Voltage vs. Output Current

Typical Characteristics

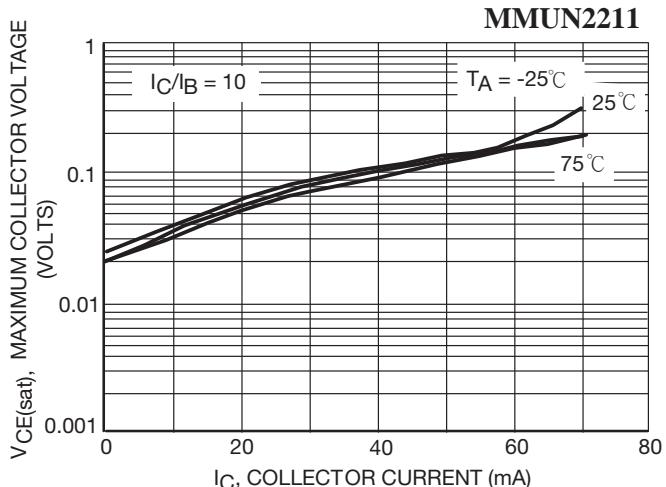


Figure 7. $V_{CE(\text{sat})}$ vs. I_C

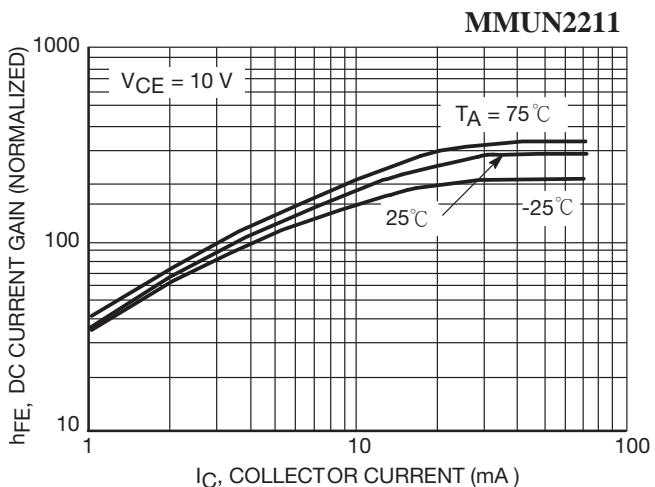


Figure 8. DC Current Gain

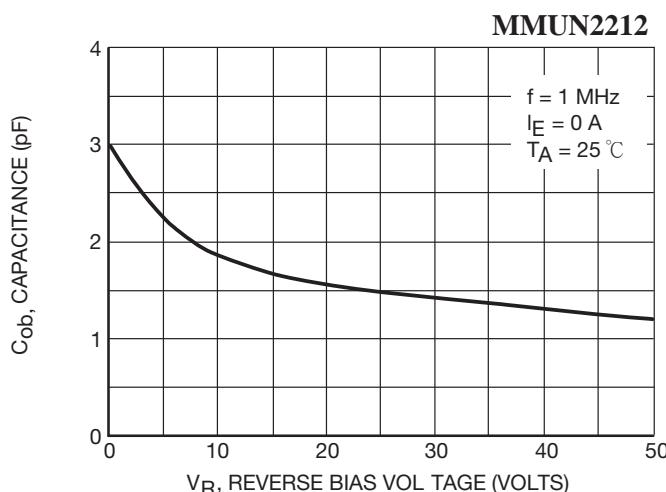


Figure 9. Output Capacitance

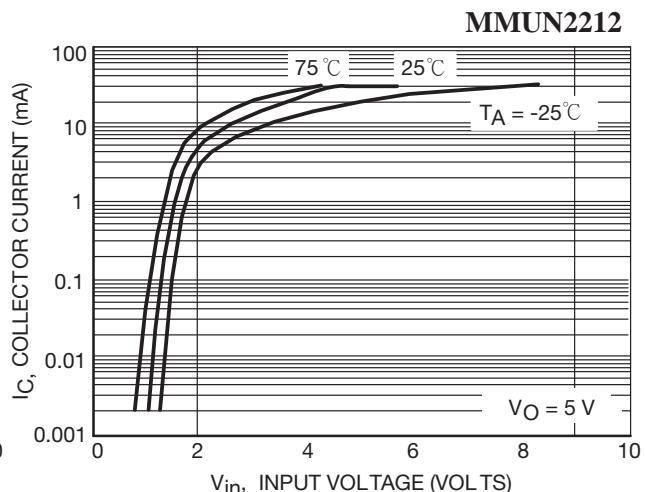


Figure 10. Output Current vs. Input Voltage

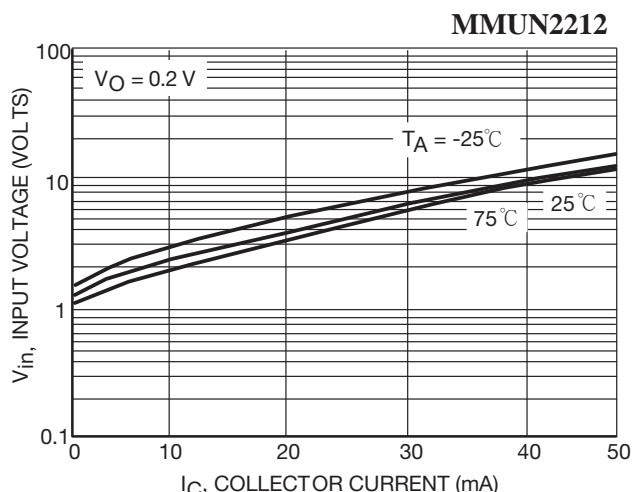


Figure 11. Input Voltage vs. Output Current

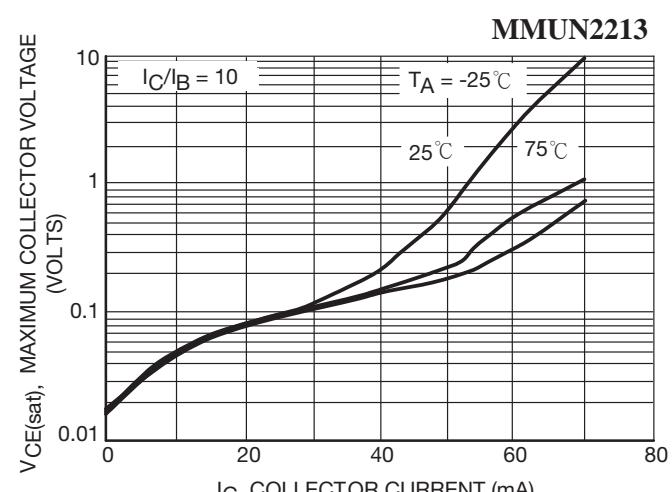


Figure 12. $V_{CE(\text{sat})}$ vs. I_C

Typical Characteristics

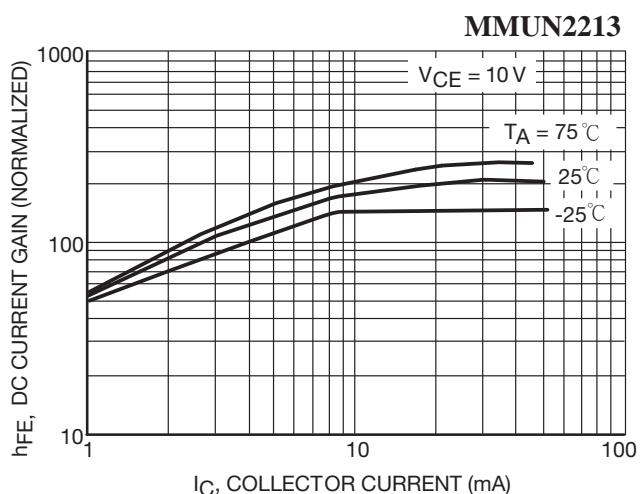


Figure 13. DC Current Gain

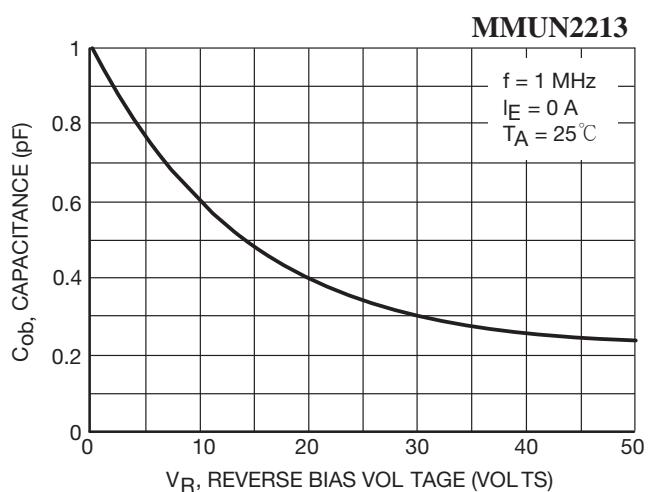


Figure 14. Output Capacitance

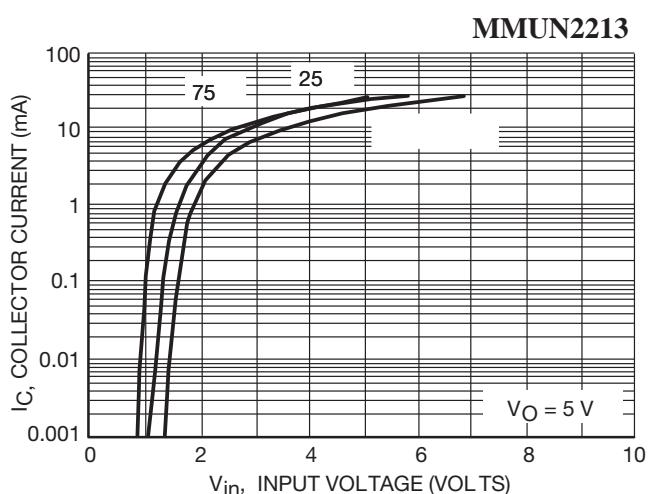


Figure 15. Output Current vs. Input Voltage

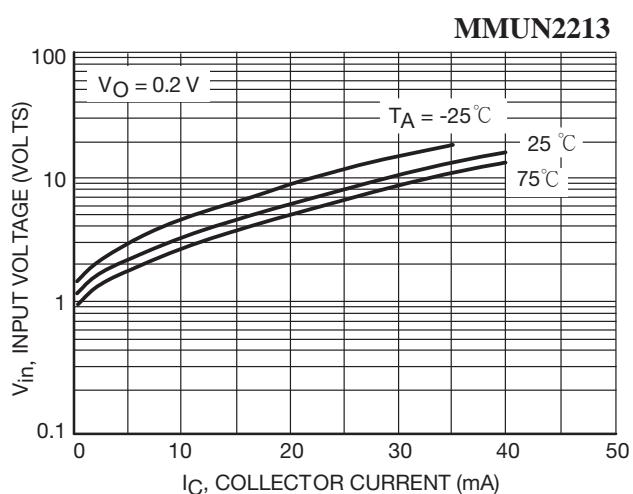


Figure 16. Input Voltage vs. Output Current

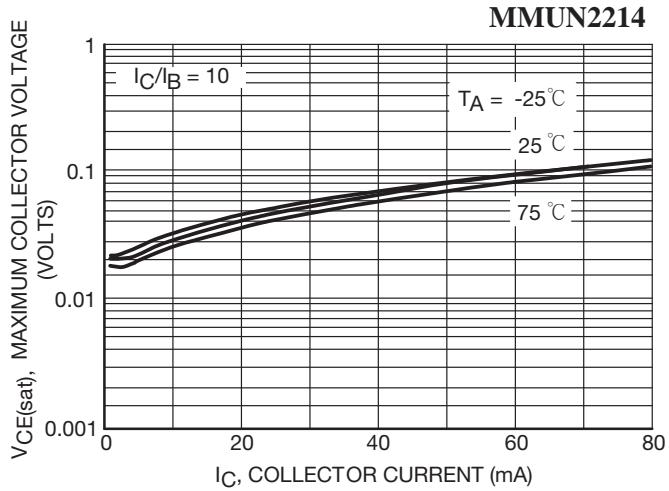


Figure 17. $V_{CE(\text{sat})}$ vs. I_C

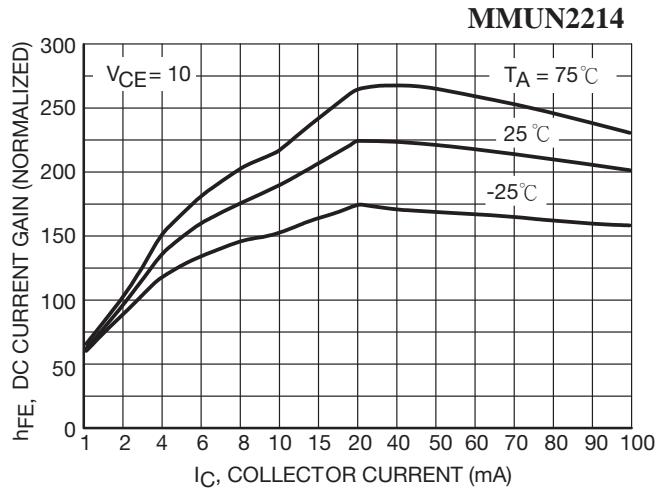


Figure 18. DC Current Gain

Typical Characteristics

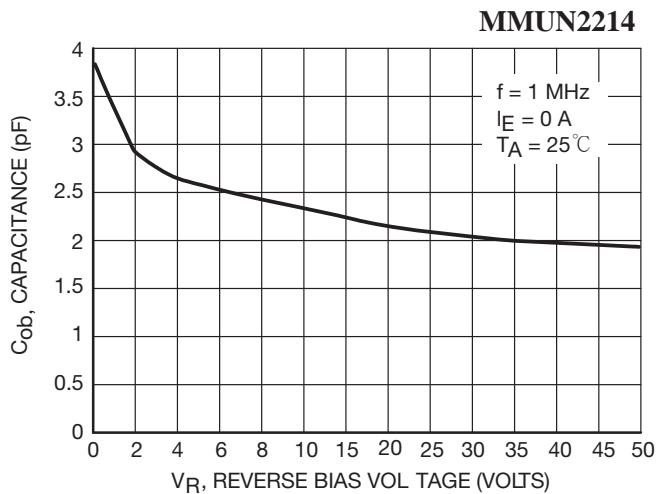


Figure 19. Output Capacitance

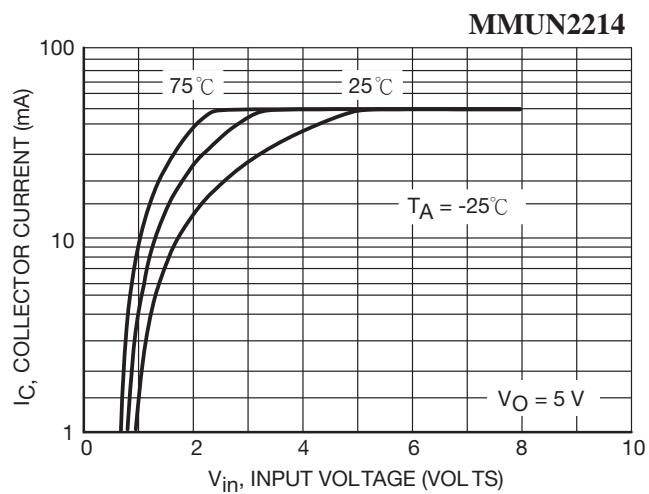


Figure 20. Output Current vs. Input Voltage

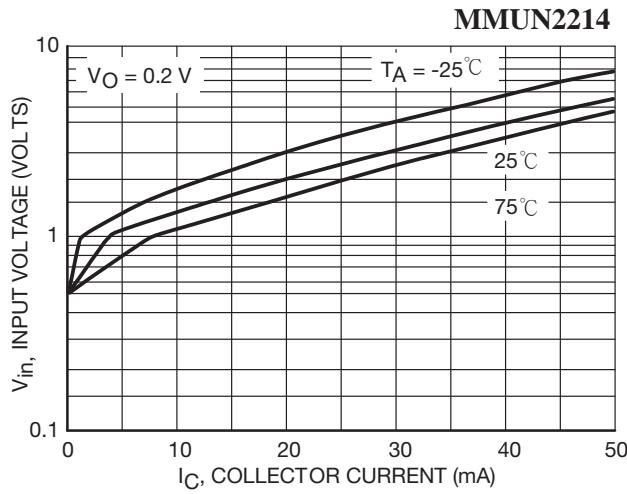


Figure 21. Input Voltage vs. Output Current

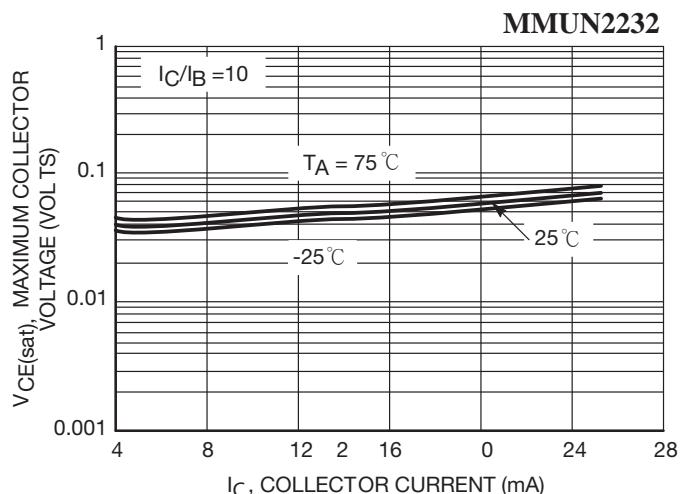


Figure 22. $V_{CE(sat)}$ vs. I_C

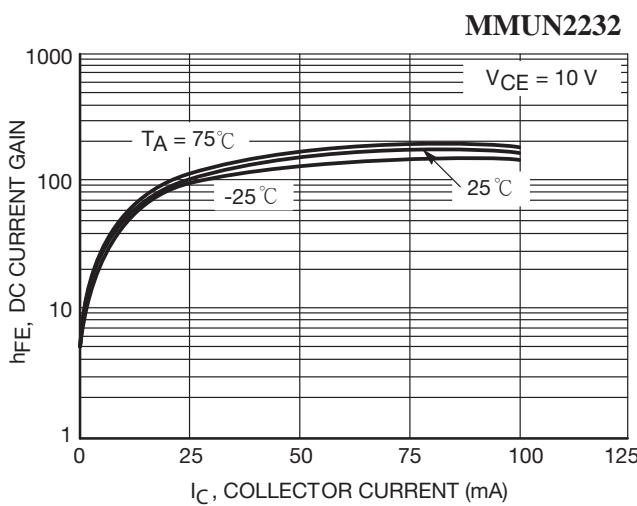


Figure 23. DC Current Gain

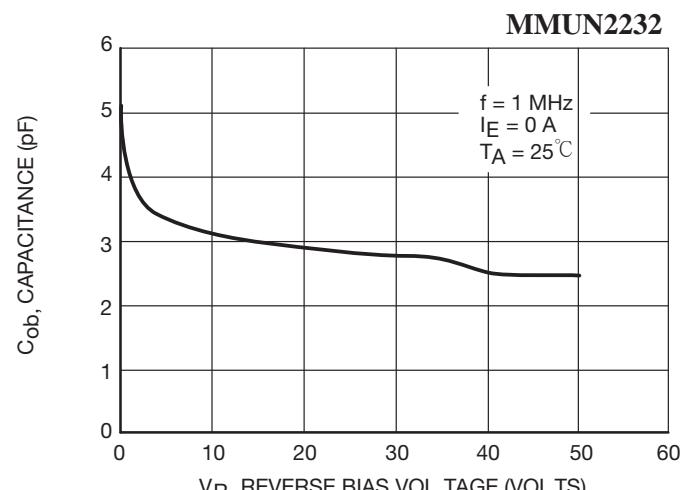


Figure 24. Output Capacitance

Typical Characteristics

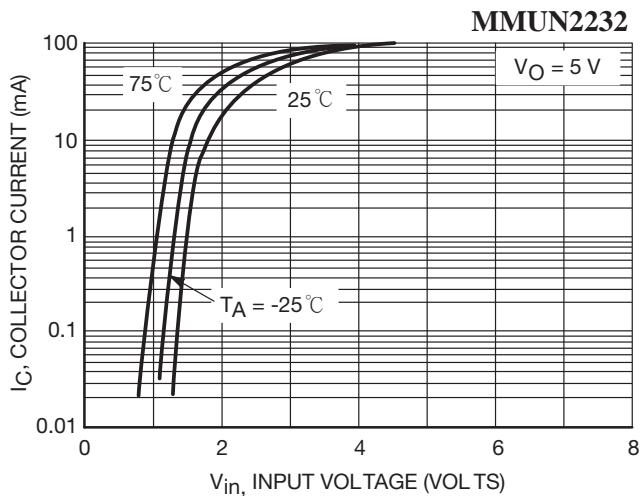


Figure 25. Output Current vs. Input Voltage

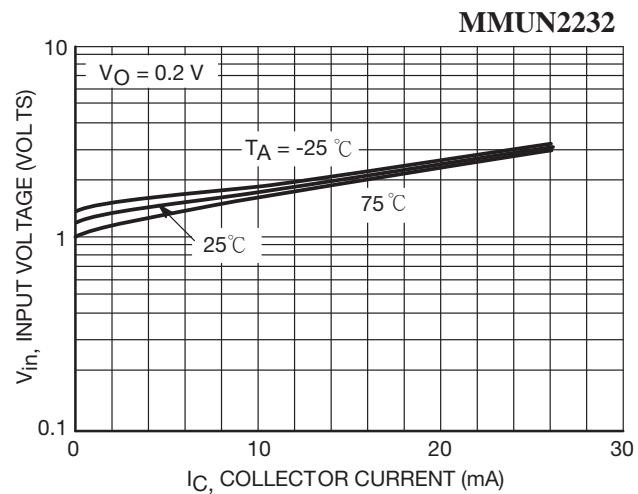


Figure 26. Output Voltage vs. Input Current

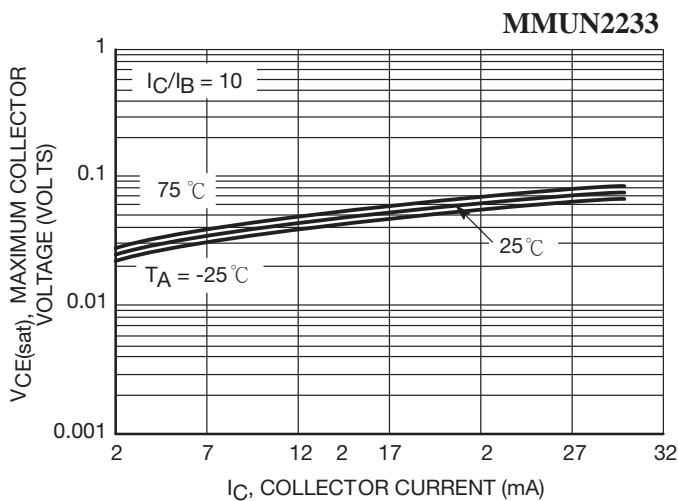


Figure 27. $V_{CE(sat)}$ vs. I_C

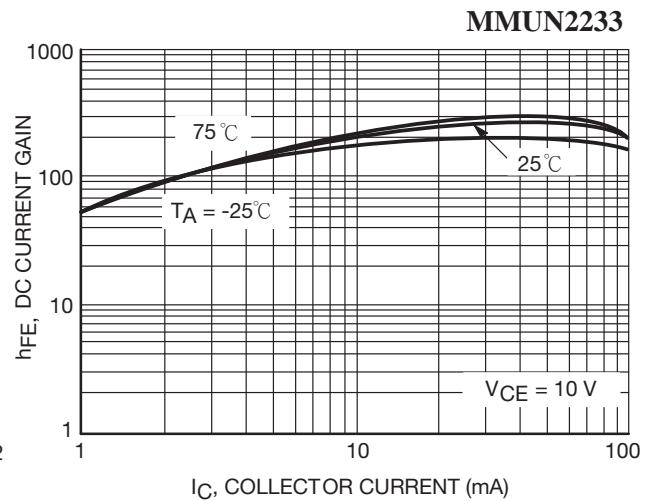


Figure 28. DC Current Gain

MMUN2211 Series

TYPICAL APPLICATIONS FOR NPN BRTs

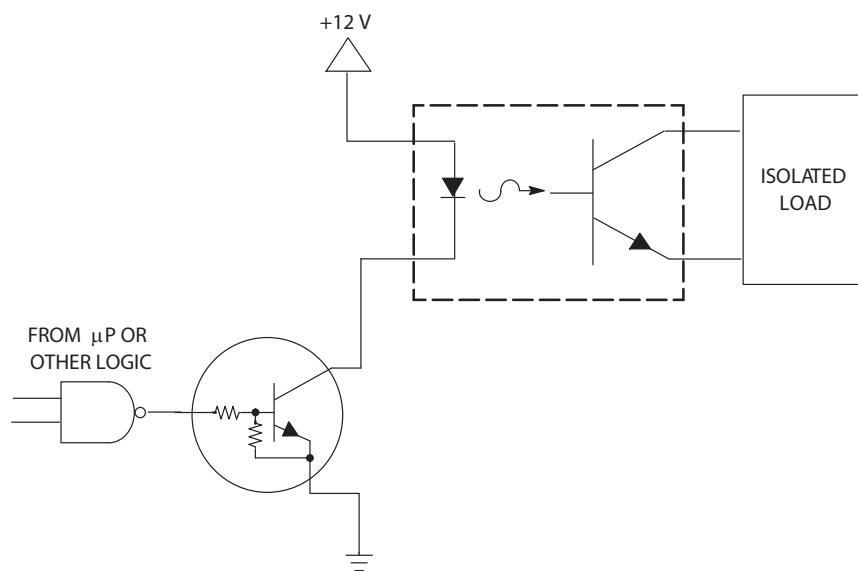


Figure 32. Level Shifter: Connects 12 or 24 Volt Circuits to Logic

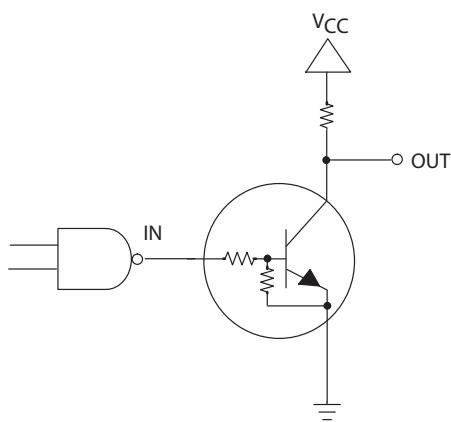


Figure 33. Open Collector Inverter: Inverts the Input Signal


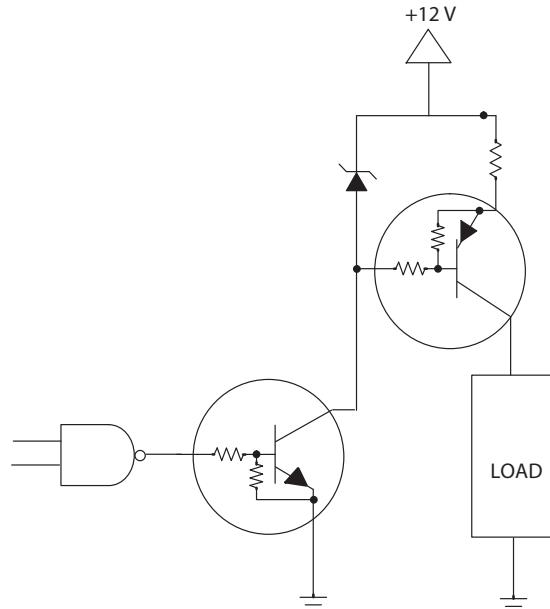


Figure 34. Inexpensive, Unregulated Current Source

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

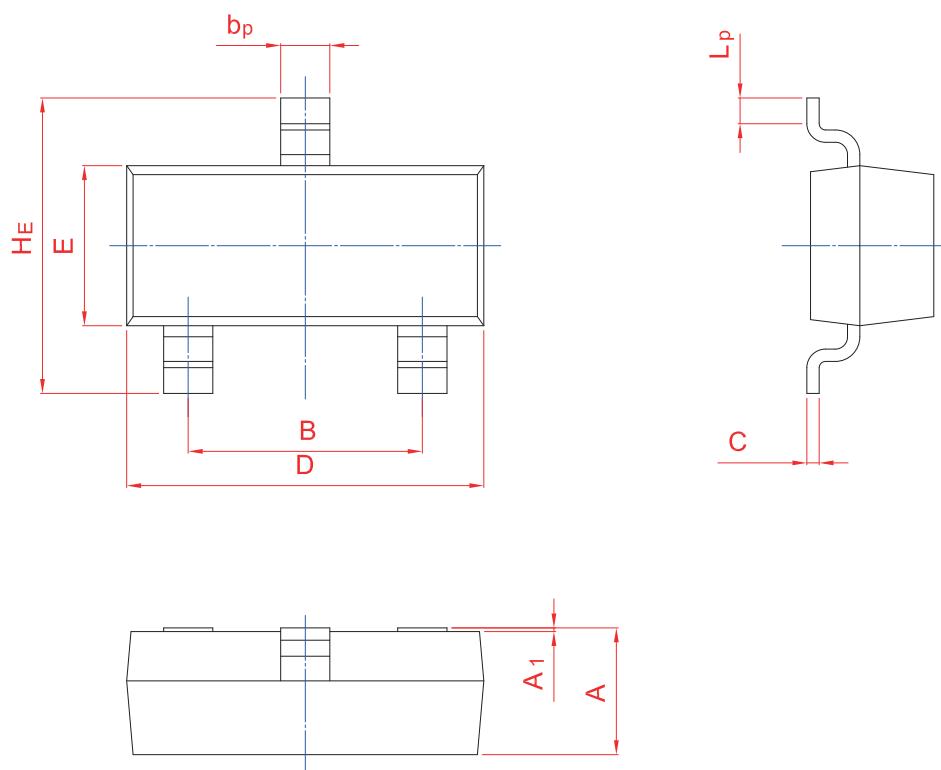

UNIT	A	B	b _p	C	D	E	H _E	A ₁	L _p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - Pre-Biased category:

Click to view products by WPMtek manufacturer:

Other Similar products are found below :

[DRC9A14E0L](#) [DTA124GKAT146](#) [DTA144WETL](#) [DTA144WKAT146](#) [DTC113EET1G](#) [DTC115TETL](#) [DTC115TKAT146](#)
[DTC144VUAT106](#) [MUN5241T1G](#) [BCR158WH6327XTSA1](#) [NSBA114TDP6T5G](#) [SMUN5330DW1T1G](#) [SSVMUN5312DW1T2G](#)
[RN1303\(TE85L,F\)](#) [RN1306\(TE85L,F\)](#) [EMH15T2R](#) [SMUN2214T3G](#) [SMUN5335DW1T1G](#) [NSBC143ZPDP6T5G](#) [NSVDTA143ZET1G](#)
[SMUN2214T1G](#) [FMA7AT148](#) [DTC114EUA-TP](#) [SMUN5237DW1T1G](#) [SMUN5213DW1T1G](#) [SMUN5114DW1T1G](#) [SMUN2111T1G](#)
[DTC124ECA-TP](#) [DTA114ECA-TP](#) [DTC113EM3T5G](#) [NSVMUN5135DW1T1G](#) [NSVMUN2237T1G](#) [NSVDTC143ZM3T5G](#)
[SMUN5335DW1T2G](#) [SMUN5216DW1T1G](#) [NSVMUN5316DW1T1G](#) [NSVMUN5215DW1T1G](#) [NSVMUN5213DW1T3G](#)
[NSVMUN2112T1G](#) [NSVIMD10AMT1G](#) [NSVEMC2DXV5T1G](#) [NSVDTC144WET1G](#) [NSVDTC123JET1G](#) [NSVDTA143EM3T5G](#)
[NSVB1706DMW5T1G](#) [NSBC143EDP6T5G](#) [RN2101,LF\(CT](#) [NSBA144WDXV6T1G](#) [DTA115TET1G](#) [NSBC115TDP6T5G](#)