


## Description

The PESDAWC236T5VU is low capacitance transient voltage suppressor array for high speed data interface that designed to protect sensitive electronics from damage or latch-up due to ESD lightning, and other voltage induced transient events.



## Feature

- 150W peak pulse power (tP = 8/20μs)
- Working voltage: 5.0V
- Low clamping voltage
- Low capacitance
- RoHS Compliant Transient Protection for High Speed Data Lines to IEC61000-4-2(ESD)±15kV(air),±8kV(contact)

## Applications


- USB 2.0 Power & Data Line Protection
- DVI & HDMI Port Protection
- Serial ATA Port Protection
- Mobile Handsets
- Digital Cameras and camcorders
- PDA & MP3 Players
- Digital TV and Set-top Boxes
- Other Portable Electronic Components

## Mechanical Characteristics

- Lead finish:100% matte Sn(Tin) Mounting
- position: Any
- Qualified max reflow temperature:260°C
- Device meets MSL 1 requirements Pure
- tin plating: 7 ~ 17 um
- Pin flatness:≤3mil

## Electronics Parameter

Symbol	Parameter
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$P_{PP}$	Peak Pulse Power
$C_J$	Junction Capacitance
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

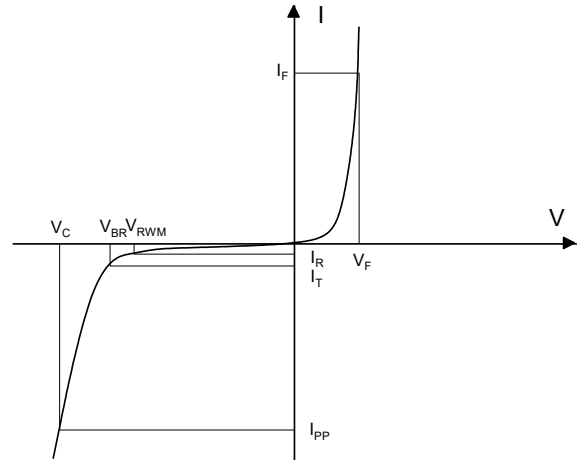

## Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	$V_{RWM}$				5.0	V
Breakdown Voltage	$V_{BR}$	$I_t = 1\text{mA}$	6.0		8.5	V
Reverse Leakage Current	$I_R$	$V_{RWM} = 5\text{V}$			1.0	$\mu\text{A}$
Clamping Voltage <sup>1)</sup>	$V_C$	TLP = 16A, $t_p = 100\text{ns}$		17.5		V
Dynamic resistance <sup>1)</sup>	$R_{DYN}$			0.6		$\Omega$
Clamping Voltage <sup>2)</sup>	$V_C$	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$			11.0	V
		$I_{PP} = 5\text{A}, t_p = 8/20\mu\text{s}$			15.0	V
Capacitance Between IO and GND	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$		0.75		pF
Capacitance Between IO and I/O	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$		0.4		pF







Notes:

1. TLP parameter:  $Z_0=50\Omega$ ,  $t_p=100\text{ns}$ ,  $t_r=2\text{ns}$ , averaging window from 60ns to 80ns.  $R_{DYN}$  is calculated from 4A to 16A.
2. Non-repetitive current pulse, according to IEC61000-4-5.


## Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu\text{s}$ )	$P_{PP}$	150	W
Peak Pulse Current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	5	A
Lead Soldering Temperature	$T_L$	260 (10 sec)	$^{\circ}\text{C}$
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~+150	$^{\circ}\text{C}$
ESD Protection-Contact Discharge	$V_{ESD}$	$\pm 8$	kV
ESD Protection-Air Discharge	$V_{ESD}$	$\pm 15$	kV

Typical Characteristics

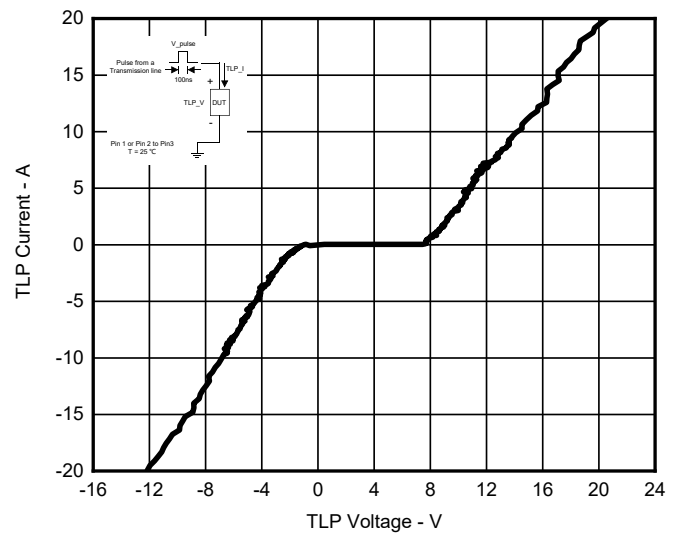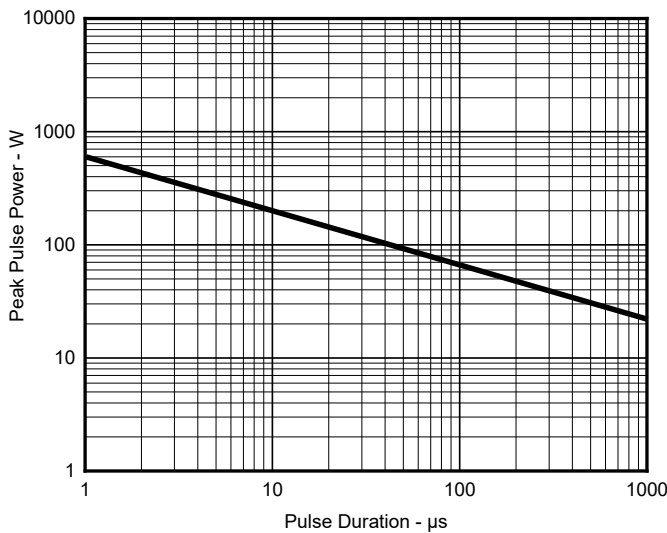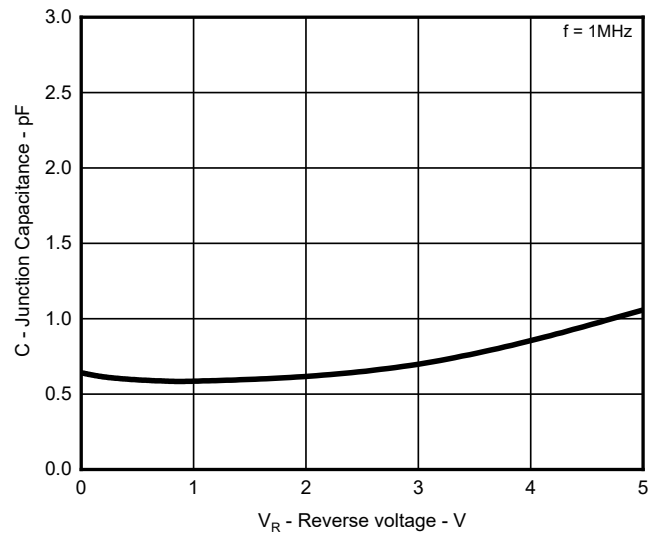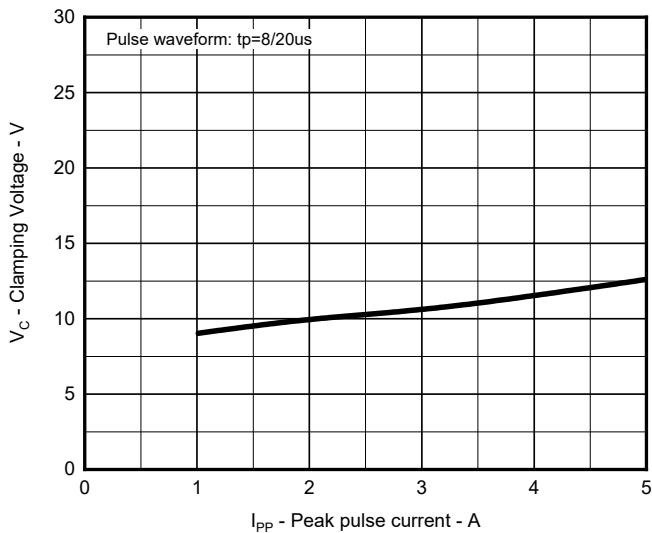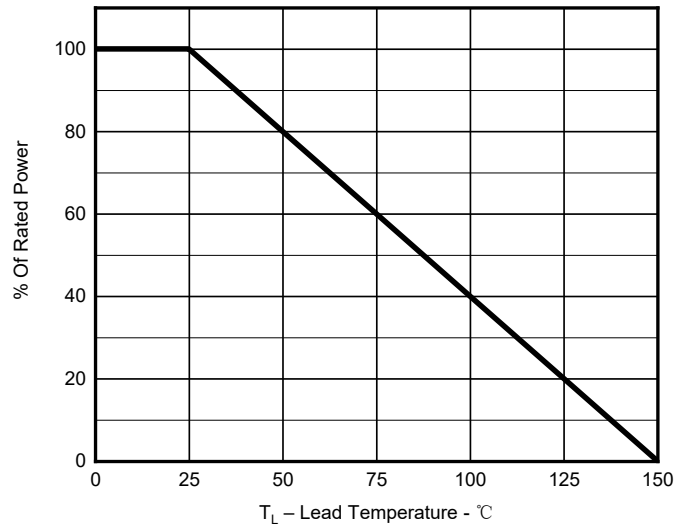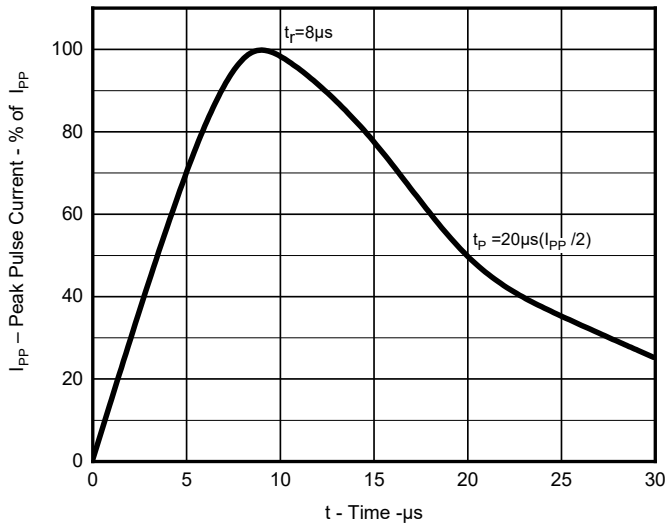

### Solder Reflow Recommendation

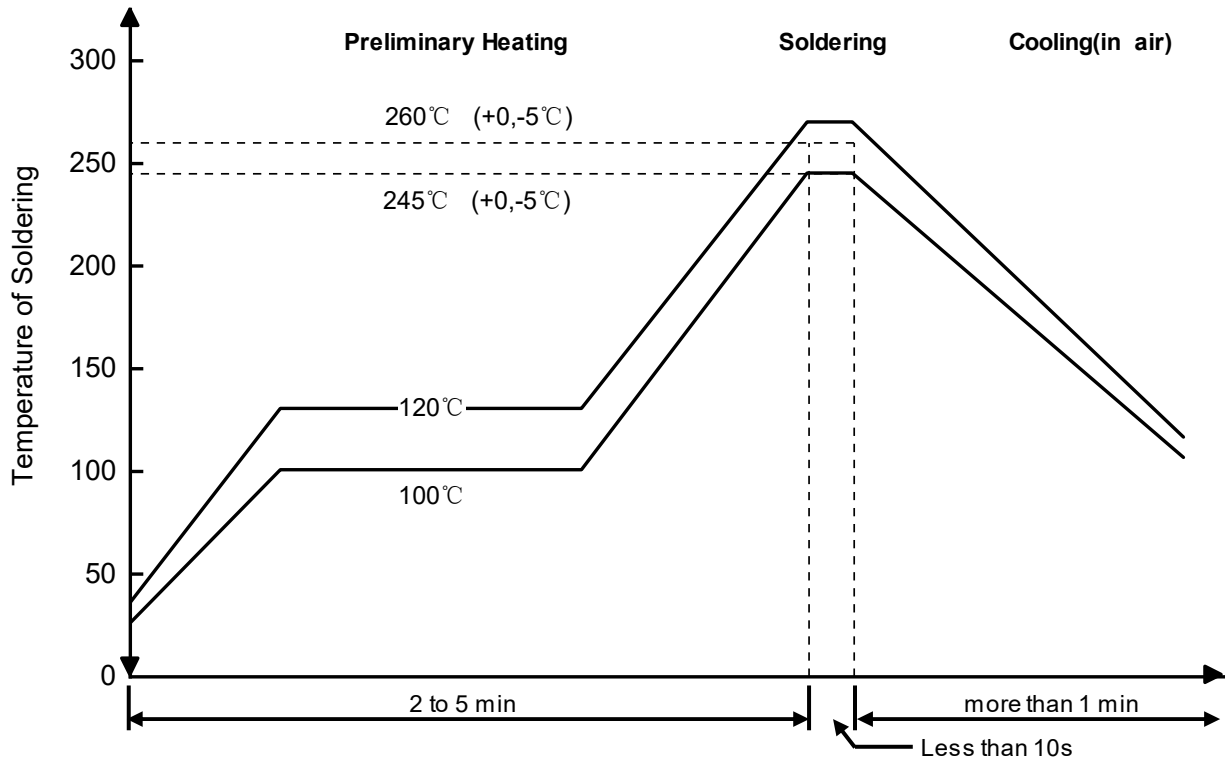

Remark: Pb free for 260°C; Pb for 245°C.

### PCB Design

For TVS diodes a low-ohmic and low-inductive path to chassis earth is absolutely mandatory in order to achieve good ESD protection. Novices in the area of ESD protection should take following suggestions to heart:

- Do not use stubs, but place the cathode of the TVS diode directly on the signal trace.
- Do not make false economies and save copper for the ground connection.
- Place via holes to ground as close as possible to the anode of the TVS diode.
- Use as many via holes as possible for the ground connection.
- Keep the length of via holes in mind! The longer the more inductance they will have.

SOT23-6

**Marking**



**Ordering information**

Order code	Package	Base qty	Delivery mode
UMW PESDAWC236T5VU	SOT23-6	3000	Tape and reel

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Youtai](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)