

## **DESCRIPTION**

The 3900 series is a range of surface mount, flat coil wound power inductors that is designed for use where high current and low loss is essential, such as laptop computers and plasma screens.

SEL	ECTION GUIDE				
	0	Inductance (100kHz, 0.1Vac)	DC Current <sup>1</sup>	Saturation Current <sup>2</sup>	DC Resistance
	Order Code	±20%	Max.	Typ.	Max.
		μH	Α	A	mΩ
	39S681C	0.68 ±30%	19.5	20.4	1.9
96	39S152C	1.50 ±30%	13.5	14.0	2.5
Type	39S252C	2.50	10.0	10.0	3.9
Standard	39S402C	4.00	8.3	8.3	5.4
and	39S602C	6.00	6.7	6.7	8.0
S	39S822C	8.20	5.8	5.8	11.4
	39S103C	10.0	5.0	5.0	13.5
	39H471C	0.47 ±30%	19.5	28.8	1.9
/be	39H102C	1.00	17.5	20.0	2.5
High Power Type	39H182C	1.80	13.5	15.3	3.9
OWE	39H282C	2.80	11.0	12.3	5.4
h P	39H402C	4.00	9.7	10.3	8.0
Hig	39H562C	5.60	8.2	8.8	11.4
	39H722C	7.20	6.6	7.8	13.5
	39U351C	0.35 ±30%	19.5	35.0	1.9
/pe	39U801C	0.80 ±30%	18.0	25.7	2.5
ار آ	39U142C	1.40	13.5	19.2	3.9
OWE	39U222C	2.20	11.0	14.8	5.4
Ultra Power Type	39U322C	3.20	9.7	12.8	8.0
Ħ	39U432C	4.30	8.2	11	11.4
	39U562C	5.60	6.6	9.5	13.5

ABSOLUTE MAXIMUM RATINGS				
Operating temperature range	-40°C to +125°C			
Storage temperature range	-40°C to +150°C			

SOLDERING INFORMATION <sup>3</sup>					
Peak reflow temperature	245°C				
Pin finish	Matte tin				
Moisture sensitivity level	1				

PACKAGING INFORMATION	
Tape & Reel	550 per reel


All specifications typical at T<sub>a</sub>=25°C


- 1 The maximum DC Current is the value at which the inductance falls to 65% (tolerance ±30%) or 75% (tolerance: ±20%) of its nominal value or until its temperature rise reaches 40°C, whichever is sooner.
- 2 The saturation current is the continuous current at 20°C ambient at which the inductance falls to 65% (tolerance: ±30%) or 75% (tolerance: ±20%) of its nominal value.
- 3 For further information, please visit www.murata-ps.com/rohs
- 4 Terminal 3 is open-circuit and for mounting stability only.







Flat Coil SM Power Inductors

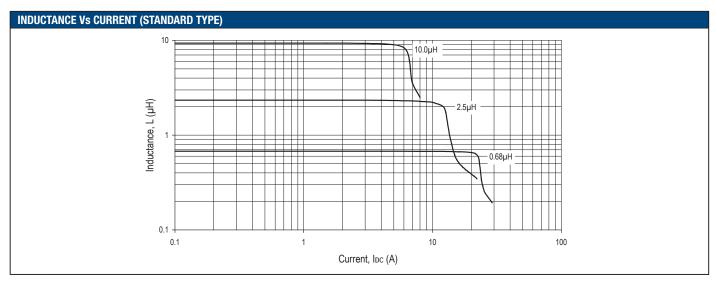


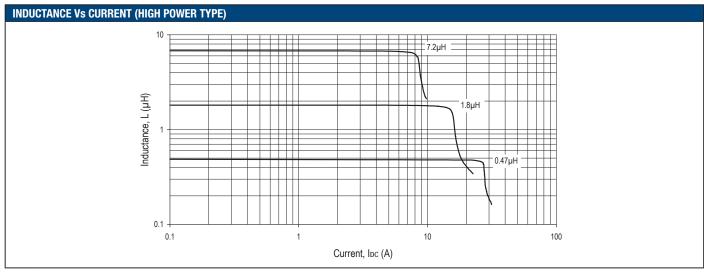


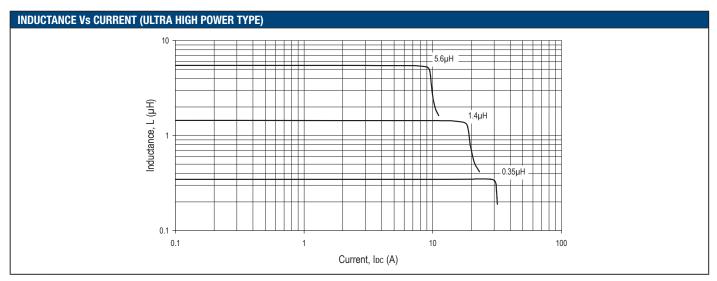

Flat Coil SM Power Inductors

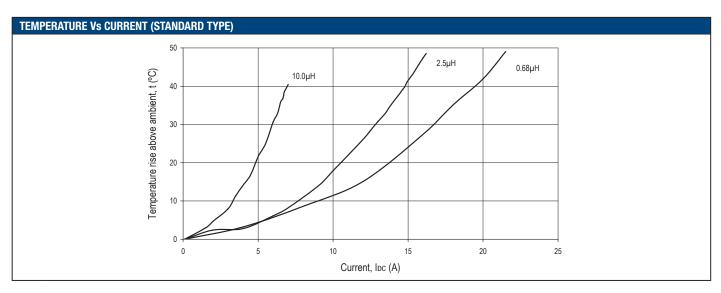


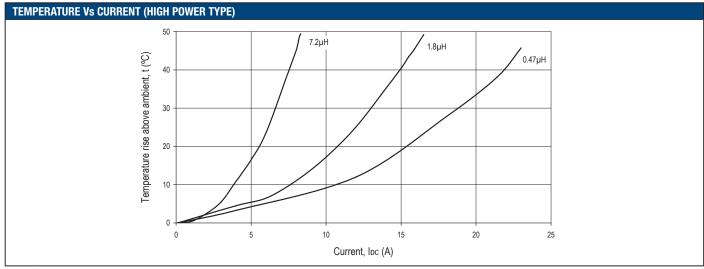


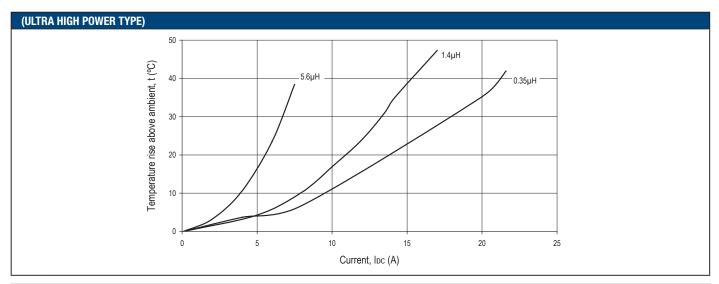



Flat Coil SM Power Inductors

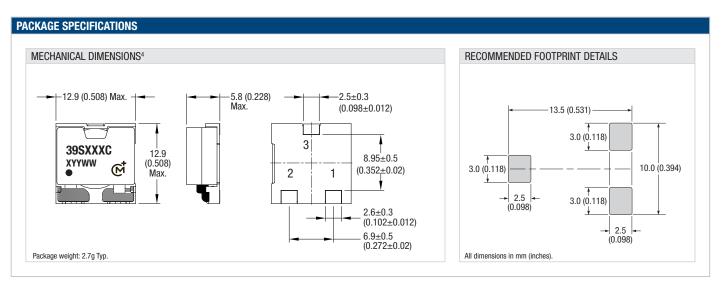

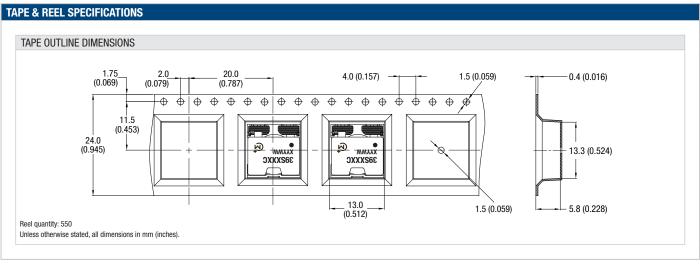

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by Murata manufacturer:

Other Similar products are found below:

MLZ1608M6R8WTD25 MLZ1608N6R8LT000 MLZ1608N3R3LTD25 MLZ1608N3R3LTD00 MLZ1608N150LT000 MLZ1608N150WTD05 MLZ1608M3R3WTD25 MLZ1608M3R3WT000 MLZ1608M150WT000 MLZ1608A1R5WT000 MLZ1608N1R5LT000 B82432C1333K000 PCMB053T-1R0MS PCMB053T-1R5MS PCMB104T-1R5MS CR32NP-100KC CR32NP-151KC CR32NP-180KC CR32NP-181KC CR32NP-1R5MC CR32NP-390KC CR32NP-390KC CR32NP-389MC CR32NP-680KC CR32NP-820KC CR32NP-8R2MC CR43NP-390KC CR43NP-560KC CR43NP-680KC CR54NP-181KC CR54NP-470LC CR54NP-820KC CR54NP-8R5MC MGDQ4-00004-P MGDU1-00016-P MHL1ECTTP18NJ MHL1JCTTD12NJ PE-51506NL PE-53601NL PE-53630NL PE-53824SNLT PE-62892NL PE-92100NL PG0434.801NLT PG0936.113NLT PM06-2N7 PM06-39NJ HC2LP-R47-R HC2-R47-R HC3-2R2-R HC8-1R2-R