


Light Meter

✓ **Measures light intensity up to 20,000 Foot-candles or Lux**
With high resolution to 0.01 Fc/Lux

Features:

- Relative mode indicates change in light levels
- Peak mode capture highest reading
- Remote light sensor on 12" (305mm) coiled cable — expandable to 24" (609mm)
- Utilizes precision photo diode and color correction filter
- Cosine and color corrected measurements
- High accuracy of $\pm(5\% \text{ reading} + 0.5\% \text{ FS})$
- MIN/MAX feature stores maximum and minimum readings
- Data Hold freezes reading in the display
- Large LCD display with analog bargraph
- Backlight for readings in low light levels
- Dimensions: 5.9 x 2.95 x 1.57" (150 x 75 x 40mm); Weight: 7oz (200g)
- Complete with 9V battery, light sensor with protective cover, and protective holster

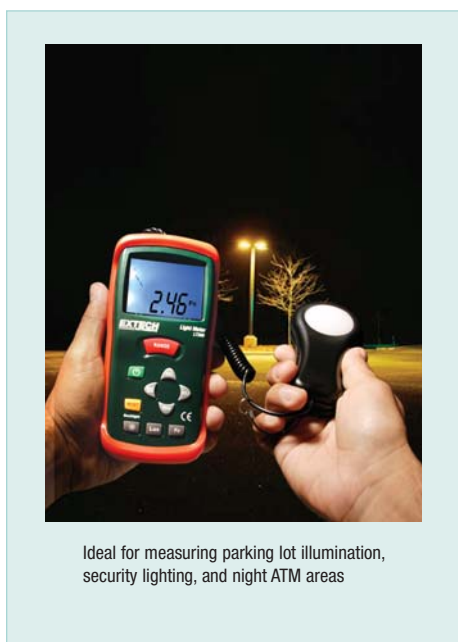

Ideal for measuring parking lot illumination, security lighting, and night ATM areas

Ordering Information:

LT300Light Meter



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Environmental Test Equipment](#) category:

Click to view products by [Extech](#) manufacturer:

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LTC20](#) [F150CD10E2](#) [F150L75](#) [F150LRS](#) [S-11](#) [FLUKE-LDG](#) [382153](#) [FM100](#) [RH210](#) [382253](#) [MO290-P](#)
[GEO-CABLE-REEL-50M](#) [T197914](#) [RD300-L](#) [IR11BD](#) [IR11GM](#) [IR12GM](#) [IR21BD](#) [IR31CE](#) [IR32BC](#) [IR33BC](#) [MP7217TC](#) [NGM-1](#) [SGX-](#)
[7NH3](#) [UT381](#) [F150-SLC50](#) [AW-CO-1000](#) [AW-NmHc-100](#) [3.000.401](#) [AX-7535](#) [CS-9S6SS-A](#) [P 2800 A](#) [P 2801](#) [P 2802](#) [P 5039](#) [P 5130](#) [P](#)
[5055](#) [P 5060](#) [P 5065](#) [P 5086](#) [P 5090](#) [P 5110](#) [P 5115](#) [P 5135](#) [P 5140](#) [P 5145](#) [P 5150](#) [P 5160](#)