

# DATA SHEET

## **BF1202; BF1202R; BF1202WR** N-channel dual-gate PoLo MOS-FETs

Product specification  
Supersedes data of 2000 Mar 29

2010 Sep 16



# N-channel dual-gate PoLo MOS-FETs    BF1202; BF1202R; BF1202WR

## FEATURES

- Short channel transistor with high forward transfer admittance to input capacitance ratio
- Low noise gain controlled amplifier
- Partly internal self-biasing circuit to ensure good cross-modulation performance during AGC and good DC stabilization.

## APPLICATIONS

- VHF and UHF applications with 3 to 9 V supply voltage, such as digital and analogue television tuners and professional communications equipment.

## DESCRIPTION




Enhancement type N-channel field-effect transistor with source and substrate interconnected. Integrated diodes between gates and source protect against excessive input voltage surges. The BF1202, BF1202R and BF1202WR are encapsulated in the SOT143B, SOT143R and SOT343R plastic packages respectively.

## PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | source      |
| 2   | drain       |
| 3   | gate 2      |
| 4   | gate 1      |

### Marking code legend:

- \* = - : made in Hong Kong
- \* = p : made in Hong Kong
- \* = t : made in Malaysia

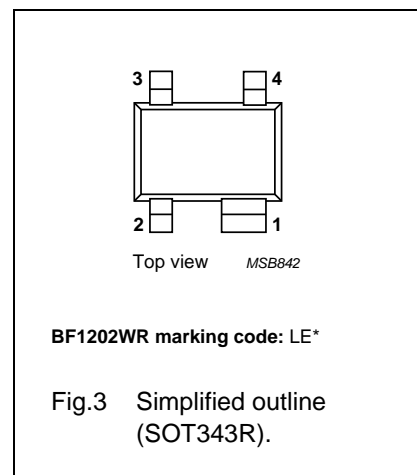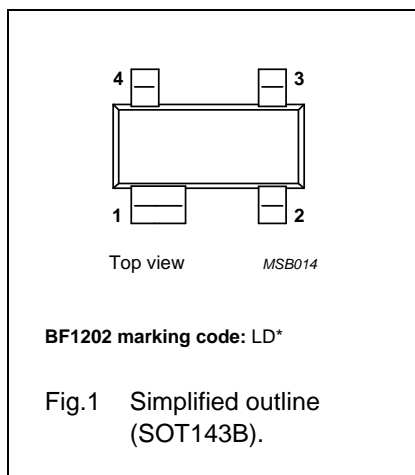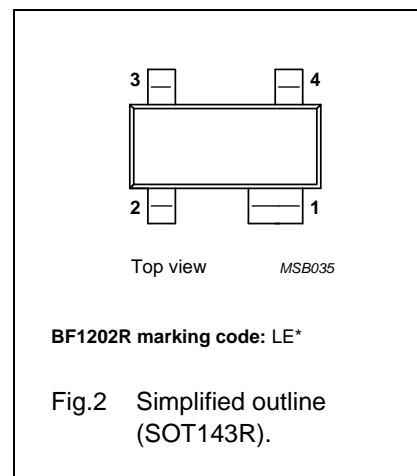

## QUICK REFERENCE DATA

| SYMBOL       | PARAMETER                      | CONDITIONS                             | MIN. | TYP. | MAX. | UNIT       |
|--------------|--------------------------------|--|------|------|------|------------|
| $V_{DS}$     | drain-source voltage           |  | –    | –    | 10   | V          |
| $I_D$        | drain current                  |  | –    | –    | 30   | mA         |
| $P_{tot}$    | total power dissipation        |  | –    | –    | 200  | mW         |
| $ y_{fs} $   | forward transfer admittance    |  | 25   | 30   | 40   | mS         |
| $C_{ig1-ss}$ | input capacitance at gate 1    |  | –    | 1.7  | 2.2  | pF         |
| $C_{rss}$    | reverse transfer capacitance   | $f = 1 \text{ MHz}$                    | –    | 15   | 30   | fF         |
| F            | noise figure                   | $f = 800 \text{ MHz}$                  | –    | 1.1  | 1.8  | dB         |
| $X_{mod}$    | cross-modulation               | input level for $k = 1\%$ at 40 dB AGC | 100  | 105  | –    | dB $\mu$ V |
| $T_j$        | operating junction temperature |  | –    | –    | 150  | °C         |

### CAUTION

This product is supplied in anti-static packing to prevent damage caused by electrostatic discharge during transport and handling.

N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

**LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 60134).


| SYMBOL    | PARAMETER                      | CONDITIONS                                    | MIN. | MAX.     | UNIT             |
|-----------|--------------------------------|---|------|----------|------------------|
| $V_{DS}$  | drain-source voltage           |   | –    | 10       | V                |
| $I_D$     | drain current                  |   | –    | 30       | mA               |
| $I_{G1}$  | gate 1 current                 |   | –    | $\pm 10$ | mA               |
| $I_{G2}$  | gate 2 current                 |   | –    | $\pm 10$ | mA               |
| $P_{tot}$ | total power dissipation        |   |      |          |                  |
|           | BF1202; BF1202R                | $T_s \leq 113\text{ }^\circ\text{C}$ ; note 1 | –    | 200      | mW               |
|           | BF1202WR                       | $T_s \leq 119\text{ }^\circ\text{C}$ ; note 1 | –    | 200      | mW               |
| $T_{stg}$ | storage temperature            |   | –65  | +150     | $^\circ\text{C}$ |
| $T_j$     | operating junction temperature |   | –    | 150      | $^\circ\text{C}$ |

**Note**

- $T_s$  is the temperature of the soldering point of the source lead.

**THERMAL CHARACTERISTICS**

| SYMBOL        | PARAMETER   | VALUE | UNIT |
|---------------|---|-------|------|
| $R_{th\ j-s}$ | thermal resistance from junction to soldering point |       |      |
|               | BF1202; BF1202R                                     | 185   | K/W  |
|               | BF1202WR  | 155   | K/W  |

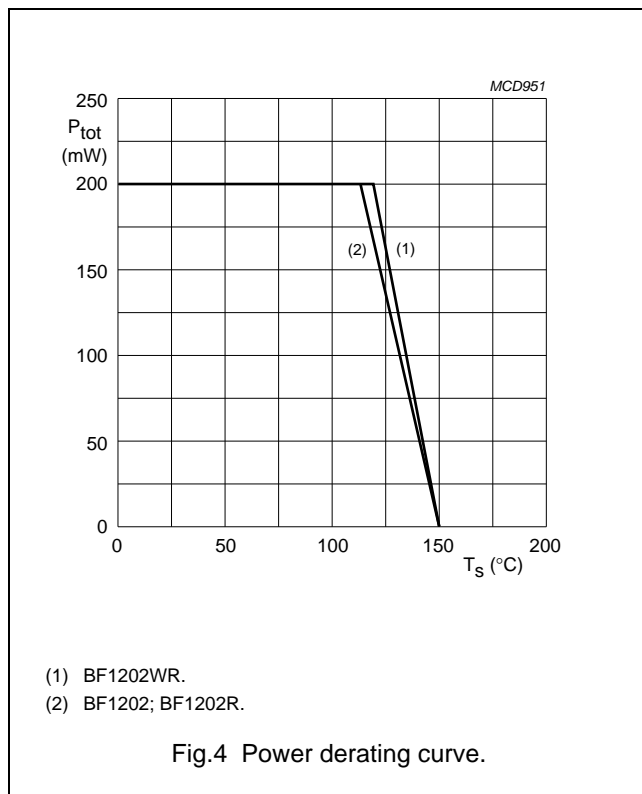

## N-channel dual-gate PoLo MOS-FETs

## BF1202; BF1202R; BF1202WR

**STATIC CHARACTERISTICS**

$T_j = 25\text{ °C}$  unless otherwise specified.

| SYMBOL          | PARAMETER                       | CONDITIONS  | MIN. | MAX. | UNIT |
|-----------------|---------------------------------|---|------|------|------|
| $V_{(BR)DSS}$   | drain-source breakdown voltage  | $V_{G1-S} = V_{G2-S} = 0$ ; $I_D = 10\text{ }\mu\text{A}$                                   | 10   | –    | V    |
| $V_{(BR)G1-SS}$ | gate 1-source breakdown voltage | $V_{G2-S} = V_{DS} = 0$ ; $I_{G1-S} = 10\text{ mA}$   | 6    | –    | V    |
| $V_{(BR)G2-SS}$ | gate 2-source breakdown voltage | $V_{G1-S} = V_{DS} = 0$ ; $I_{G2-S} = 10\text{ mA}$   | 6    | –    | V    |
| $V_{(F)S-G1}$   | forward source-gate 1 voltage   | $V_{G2-S} = V_{DS} = 0$ ; $I_{S-G1} = 10\text{ mA}$   | 0.5  | 1.5  | V    |
| $V_{(F)S-G2}$   | forward source-gate 2 voltage   | $V_{G1-S} = V_{DS} = 0$ ; $I_{S-G2} = 10\text{ mA}$   | 0.5  | 1.5  | V    |
| $V_{G1-S(th)}$  | gate 1-source threshold voltage | $V_{G2-S} = 4\text{ V}$ ; $V_{DS} = 5\text{ V}$ ; $I_D = 100\text{ }\mu\text{A}$            | 0.3  | 1.0  | V    |
| $V_{G2-S(th)}$  | gate 2-source threshold voltage | $V_{G1-S} = 5\text{ V}$ ; $V_{DS} = 5\text{ V}$ ; $I_D = 100\text{ }\mu\text{A}$            | 0.3  | 1.2  | V    |
| $I_{DSX}$       | drain-source current            | $V_{G2-S} = 4\text{ V}$ ; $V_{DS} = 5\text{ V}$ ; $R_{G1} = 120\text{ k}\Omega$ ;<br>note 1 | 8    | 16   | mA   |
| $I_{G1-SS}$     | gate 1 cut-off current          | $V_{G2-S} = V_{DS} = 0$ ; $V_{G1-S} = 5\text{ V}$   | –    | 50   | nA   |
| $I_{G2-SS}$     | gate 2 cut-off current          | $V_{G1-S} = V_{DS} = 0$ ; $V_{G2-S} = 4\text{ V}$   | –    | 20   | nA   |

**Note**

- $R_{G1}$  connects  $G_1$  to  $V_{GG} = 5\text{ V}$ .

**DYNAMIC CHARACTERISTICS**

Common source;  $T_{amb} = 25\text{ °C}$ ;  $V_{G2-S} = 4\text{ V}$ ;  $V_{DS} = 5\text{ V}$ ;  $I_D = 12\text{ mA}$ ; unless otherwise specified.





| SYMBOL       | PARAMETER                    | CONDITIONS  | MIN. | TYP. | MAX. | UNIT       |
|--------------|------------------------------|---|------|------|------|------------|
| $ y_{fs} $   | forward transfer admittance  | pulsed; $T_j = 25\text{ °C}$  | 25   | 30   | 40   | mS         |
| $C_{ig1-ss}$ | input capacitance at gate 1  | $f = 1\text{ MHz}$  | –    | 1.7  | 2.2  | pF         |
| $C_{ig2-ss}$ | input capacitance at gate 2  | $f = 1\text{ MHz}$  | –    | 1    | –    | pF         |
| $C_{oss}$    | output capacitance           | $f = 1\text{ MHz}$  | –    | 0.85 | –    | pF         |
| $C_{rss}$    | reverse transfer capacitance | $f = 1\text{ MHz}$  | –    | 15   | 30   | fF         |
| F            | noise figure                 | $f = 10.7\text{ MHz}$ ; $G_S = 20\text{ mS}$ ; $B_S = 0$  | –    | 9    | 11   | dB         |
|              |                              | $f = 400\text{ MHz}$ ; $Y_S = Y_{S\text{ opt}}$   | –    | 0.9  | 1.5  | dB         |
|              |                              | $f = 800\text{ MHz}$ ; $Y_S = Y_{S\text{ opt}}$   | –    | 1.1  | 1.8  | dB         |
| $G_{tr}$     | power gain                   | $f = 200\text{ MHz}$ ; $G_S = 2\text{ mS}$ ; $B_S = B_{S\text{ opt}}$ ;<br>$G_L = 0.5\text{ mS}$ ; $B_L = B_{L\text{ opt}}$ | –    | 34.5 | –    | dB         |
|              |                              | $f = 400\text{ MHz}$ ; $G_S = 2\text{ mS}$ ; $B_S = B_{S\text{ opt}}$ ;<br>$G_L = 1\text{ mS}$ ; $B_L = B_{L\text{ opt}}$   | –    | 30.5 | –    | dB         |
|              |                              | $f = 800\text{ MHz}$ ; $G_S = 3.3\text{ mS}$ ; $B_S = B_{S\text{ opt}}$ ;<br>$G_L = 1\text{ mS}$ ; $B_L = B_{L\text{ opt}}$ | –    | 26.5 | –    | dB         |
| $X_{mod}$    | cross-modulation             | input level for $k = 1\%$ ; $f_w = 50\text{ MHz}$ ;<br>$f_{unw} = 60\text{ MHz}$ ; note 1                                   |      |      |      |            |
|              |                              | at 0 dB AGC   | 90   | –    | –    | dB $\mu$ V |
|              |                              | at 10 dB AGC  | –    | 92   | –    | dB $\mu$ V |
|              |                              | at 40 dB AGC  | 100  | 105  | –    | dB $\mu$ V |

**Note**

- Measured in Fig.21 test circuit.





N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

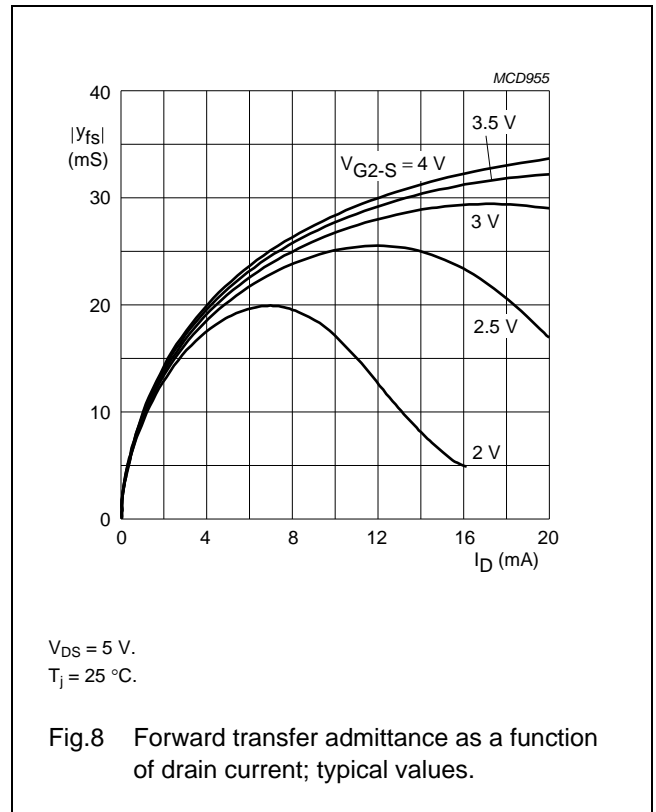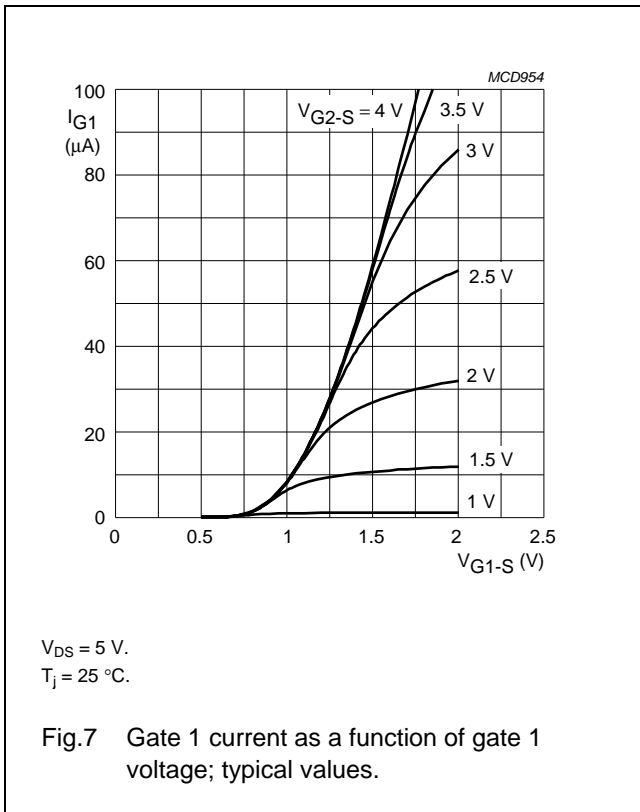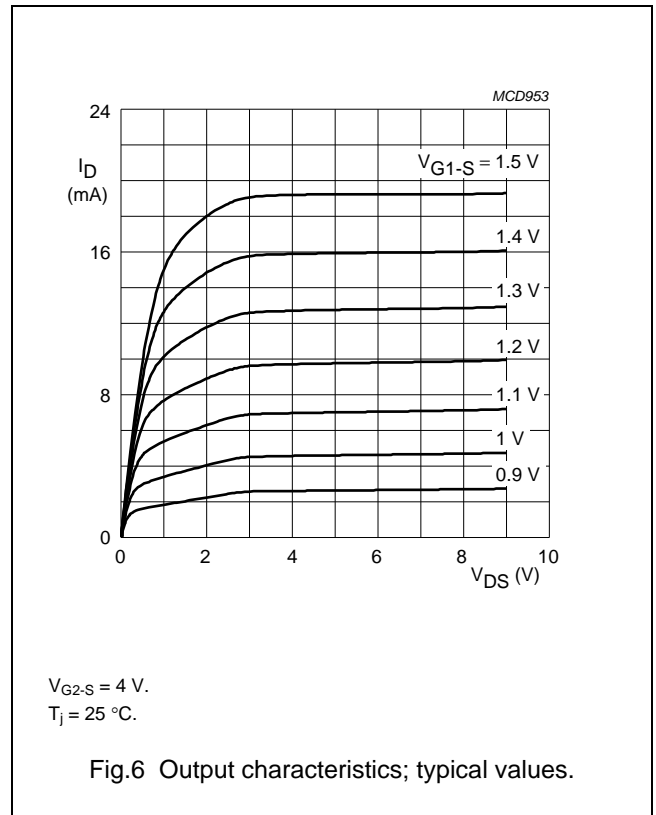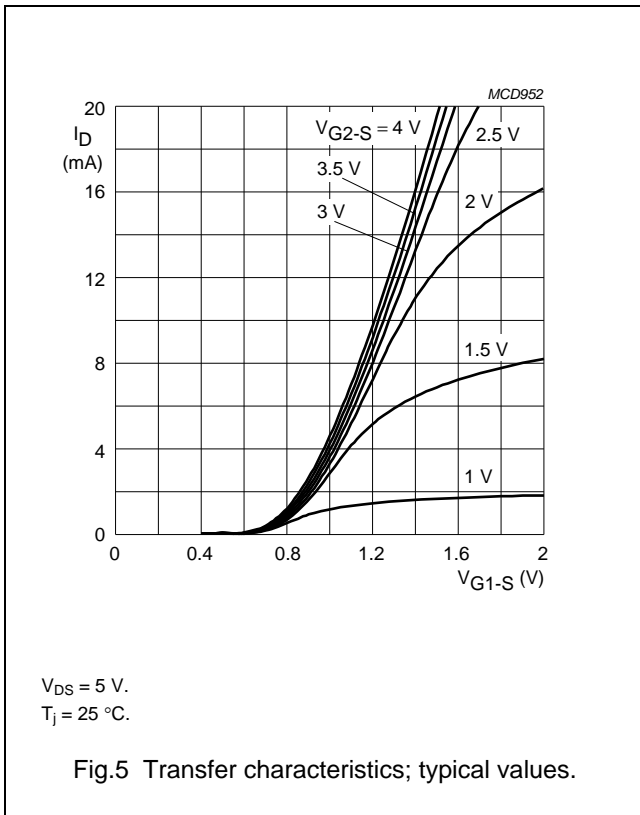





N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

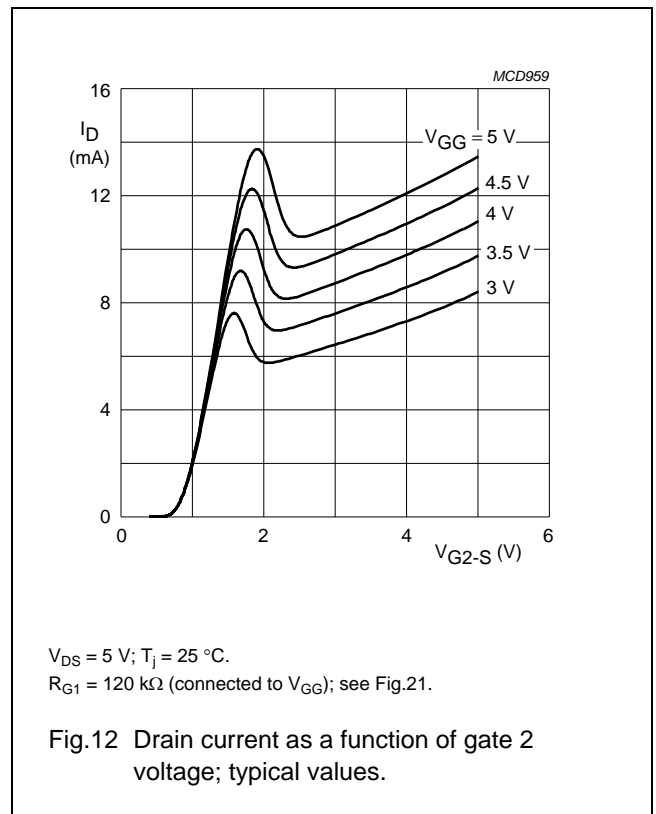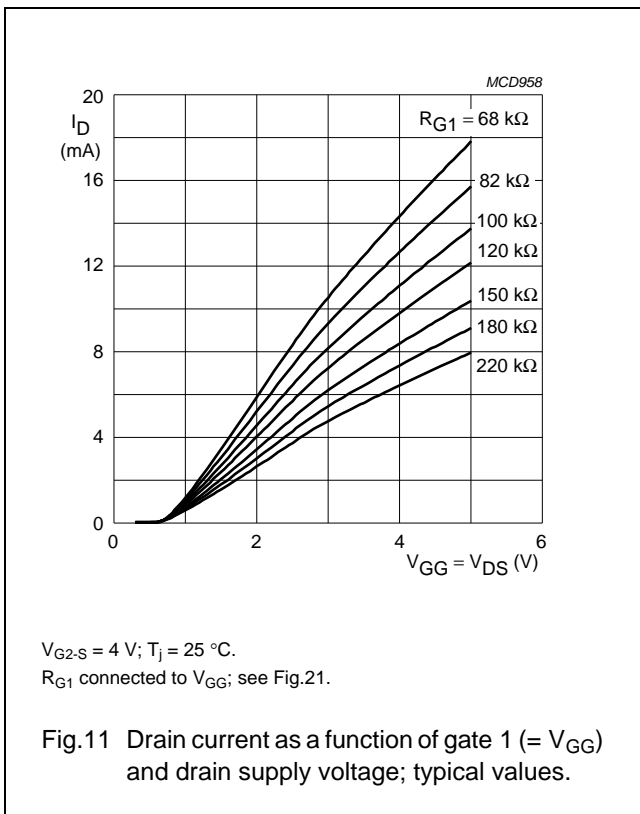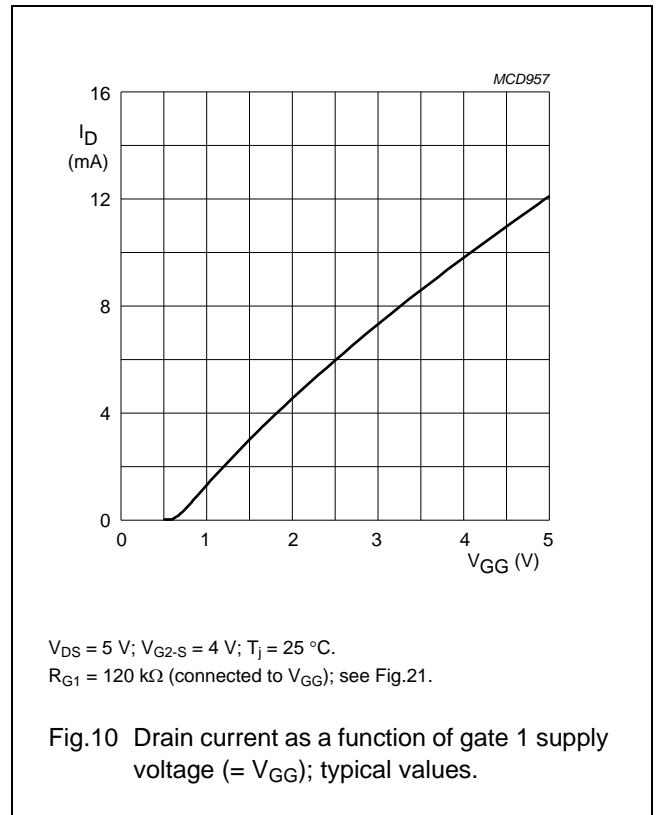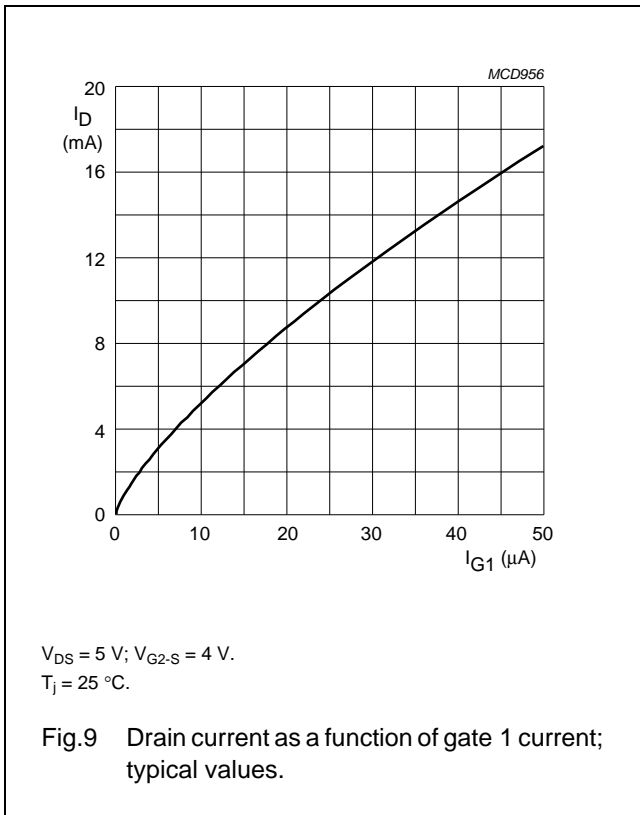





N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

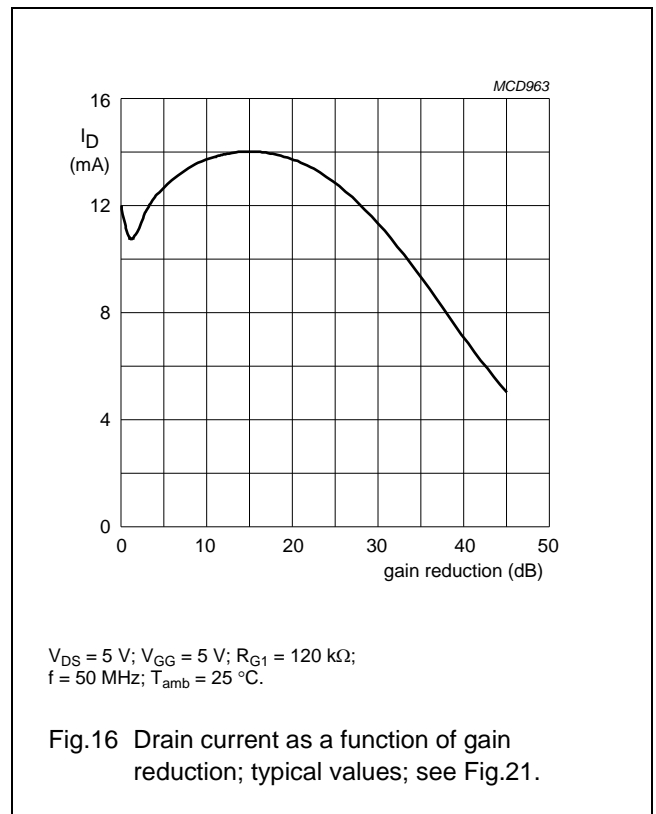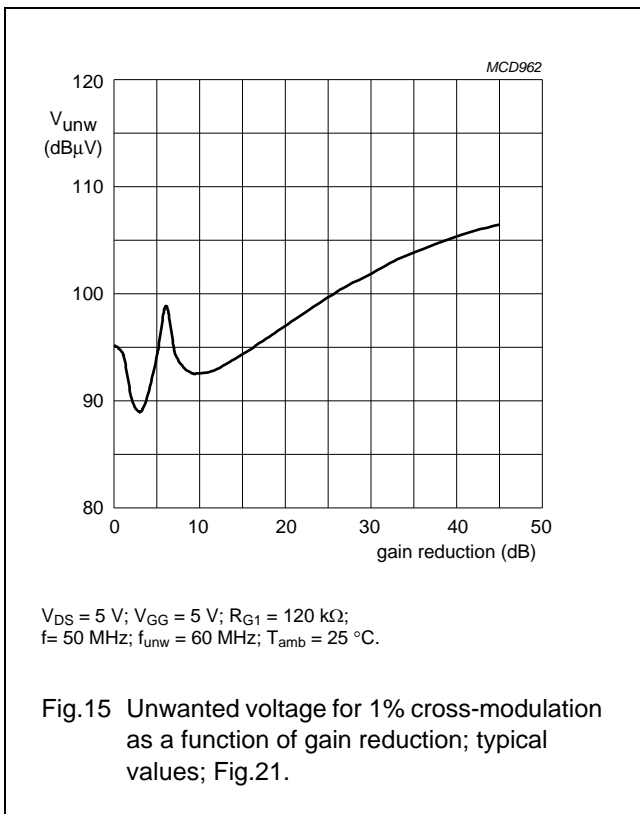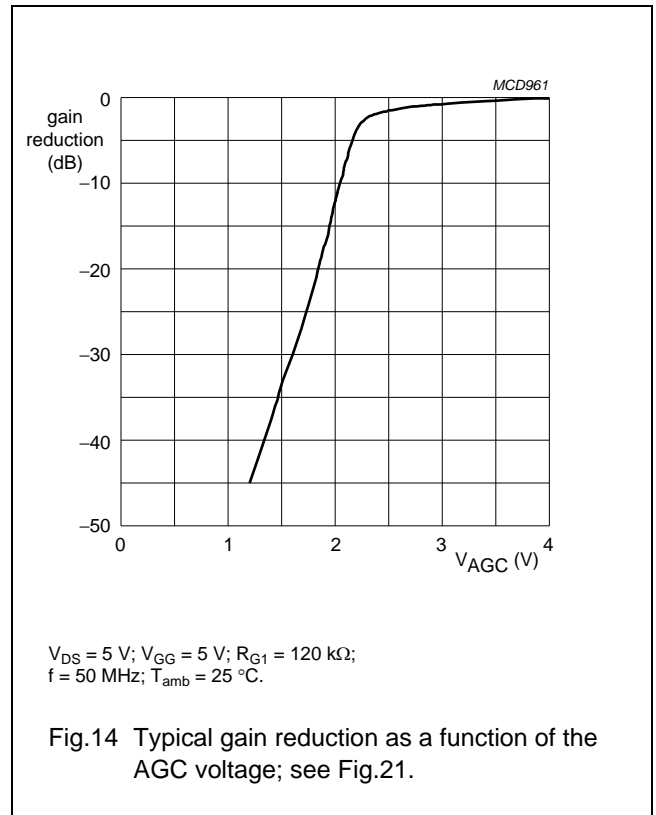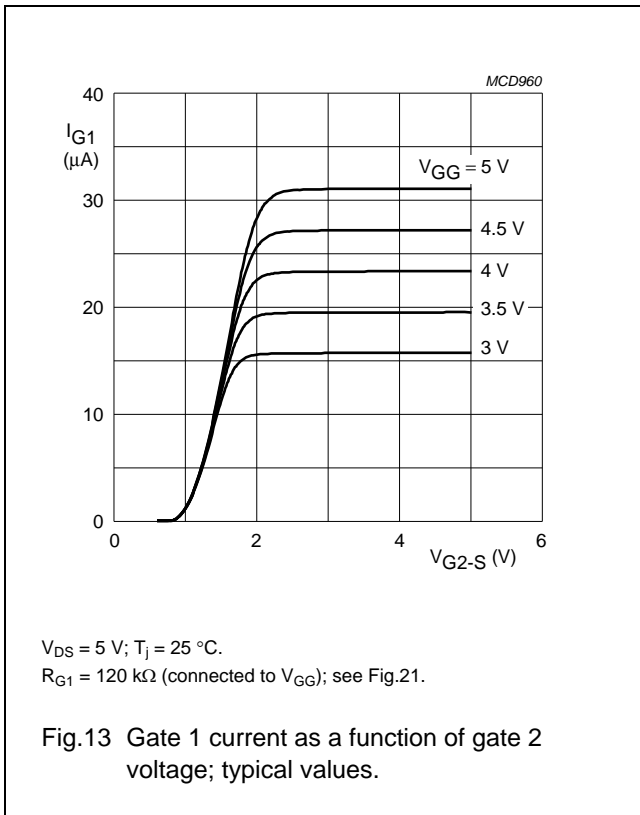

N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

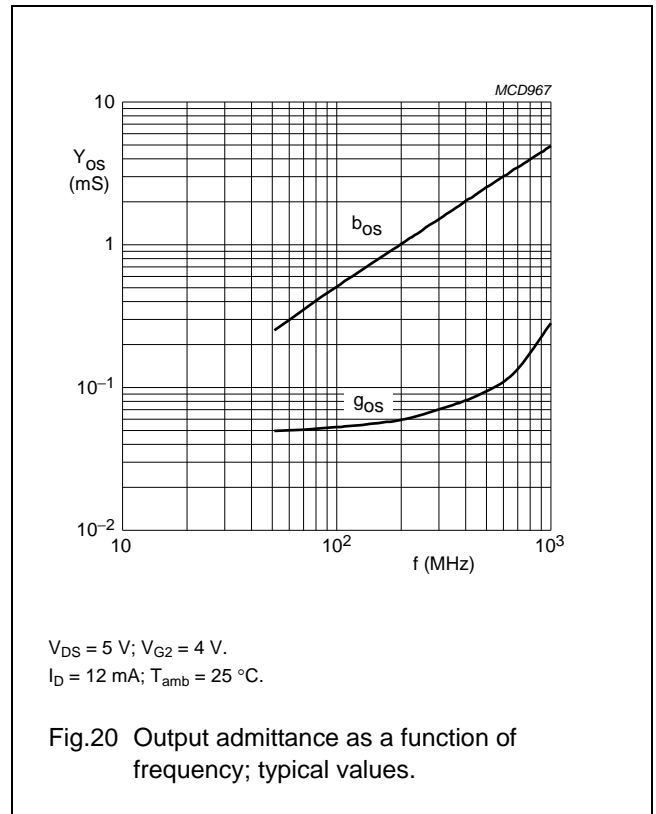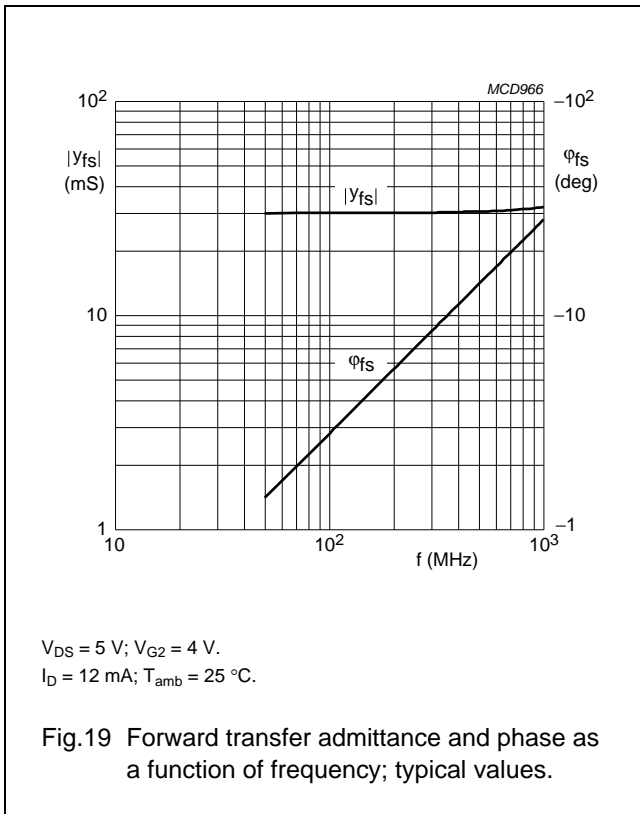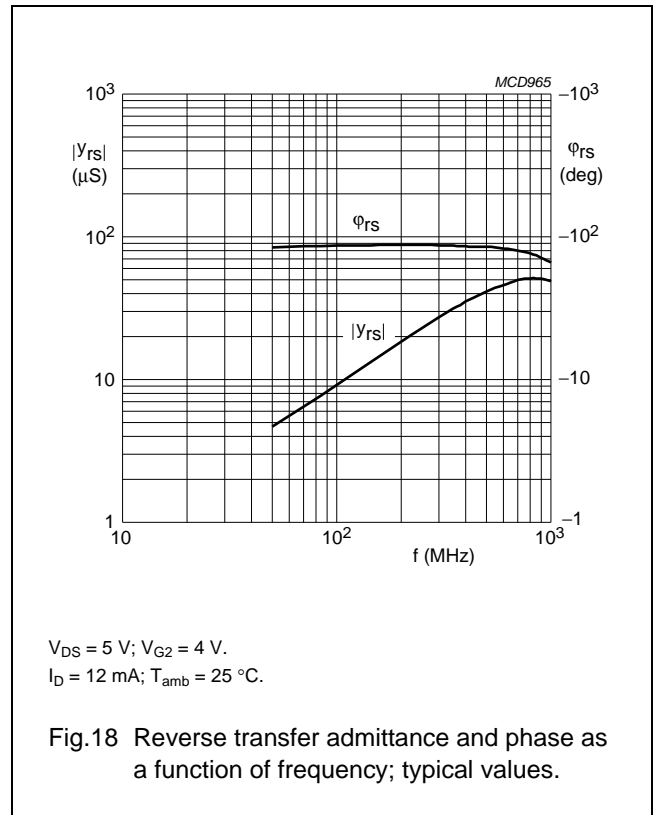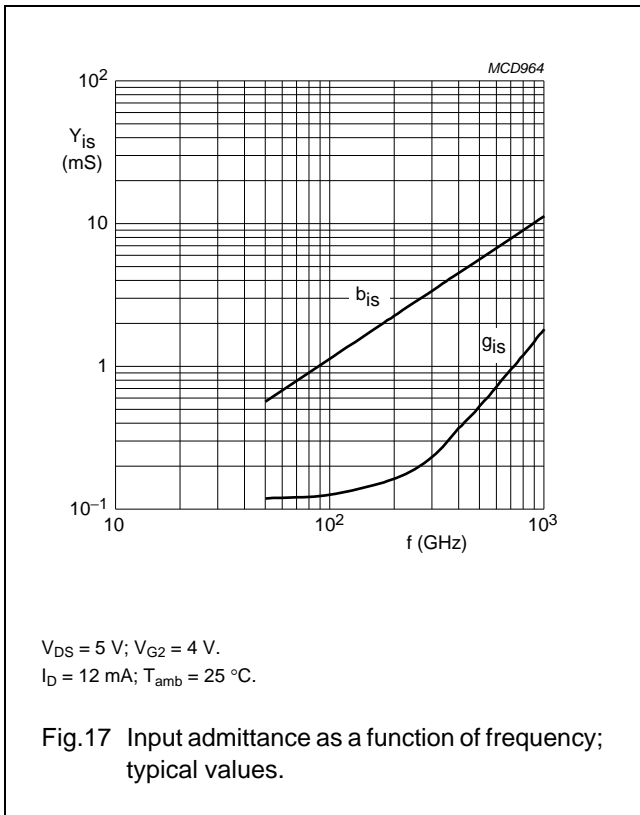



N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

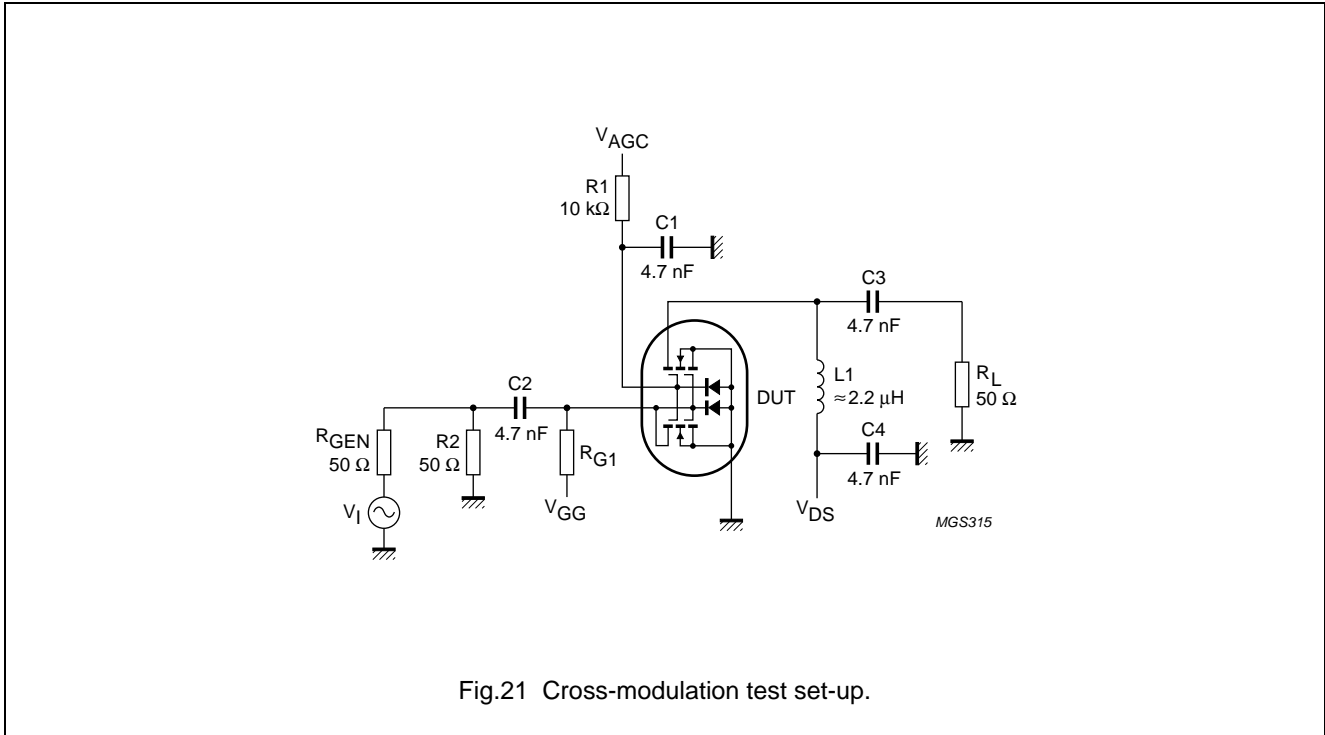


Fig.21 Cross-modulation test set-up.

**Table 1** Scattering parameters:  $V_{DS} = 5\text{ V}$ ;  $V_{G2-S} = 4\text{ V}$ ;  $I_D = 12\text{ mA}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$

| f (MHz) | S <sub>11</sub>   |             | S <sub>21</sub>   |             | S <sub>12</sub>   |             | S <sub>22</sub>   |             |
|---------|-------------------|-------------|-------------------|-------------|-------------------|-------------|-------------------|-------------|
|         | MAGNITUDE (ratio) | ANGLE (deg) | MAGNITUDE (ratio) | ANGLE (deg) | MAGNITUDE (ratio) | ANGLE (deg) | MAGNITUDE (ratio) | ANGLE (deg) |
| 50      | 0.988             | -3.26       | 2.989             | 176.2       | 0.0005            | 92.6        | 0.995             | -1.50       |
| 100     | 0.988             | -6.52       | 3.017             | 172.5       | 0.0009            | 88.0        | 0.995             | -3.01       |
| 200     | 0.984             | -12.99      | 2.990             | 165.0       | 0.0018            | 82.5        | 0.994             | -5.95       |
| 300     | 0.977             | -19.39      | 2.949             | 157.6       | 0.0027            | 78.2        | 0.992             | -8.86       |
| 400     | 0.965             | -25.65      | 2.913             | 150.3       | 0.0036            | 75.4        | 0.990             | -11.79      |
| 500     | 0.951             | -31.76      | 2.853             | 143.2       | 0.0039            | 71.8        | 0.988             | -14.65      |
| 600     | 0.936             | -37.68      | 2.793             | 136.3       | 0.0042            | 69.9        | 0.986             | -17.41      |
| 700     | 0.919             | -43.42      | 2.727             | 129.5       | 0.0044            | 68.9        | 0.984             | -20.10      |
| 800     | 0.903             | -48.94      | 2.664             | 123.0       | 0.0043            | 68.5        | 0.980             | -22.69      |
| 900     | 0.887             | -54.25      | 2.593             | 116.7       | 0.0041            | 70.7        | 0.975             | -25.27      |
| 1000    | 0.870             | -59.34      | 2.518             | 110.5       | 0.0038            | 72.4        | 0.970             | -27.90      |

**Table 2** Noise data:  $V_{DS} = 5\text{ V}$ ;  $V_{G2-S} = 4\text{ V}$ ;  $I_D = 12\text{ mA}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$

| f (MHz) | F <sub>min</sub> (dB) | Γ <sub>opt</sub> |       | R <sub>n</sub> (Ω) |
|---------|-----------------------|------------------|-------|--------------------|
|         |                       | (ratio)          | (deg) |                    |
| 400     | 0.9                   | 0.805            | 28.5  | 50                 |
| 800     | 1.1                   | 0.725            | 47.2  | 40                 |


N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

PACKAGE OUTLINES

Plastic surface-mounted package; 4 leads

SOT143B

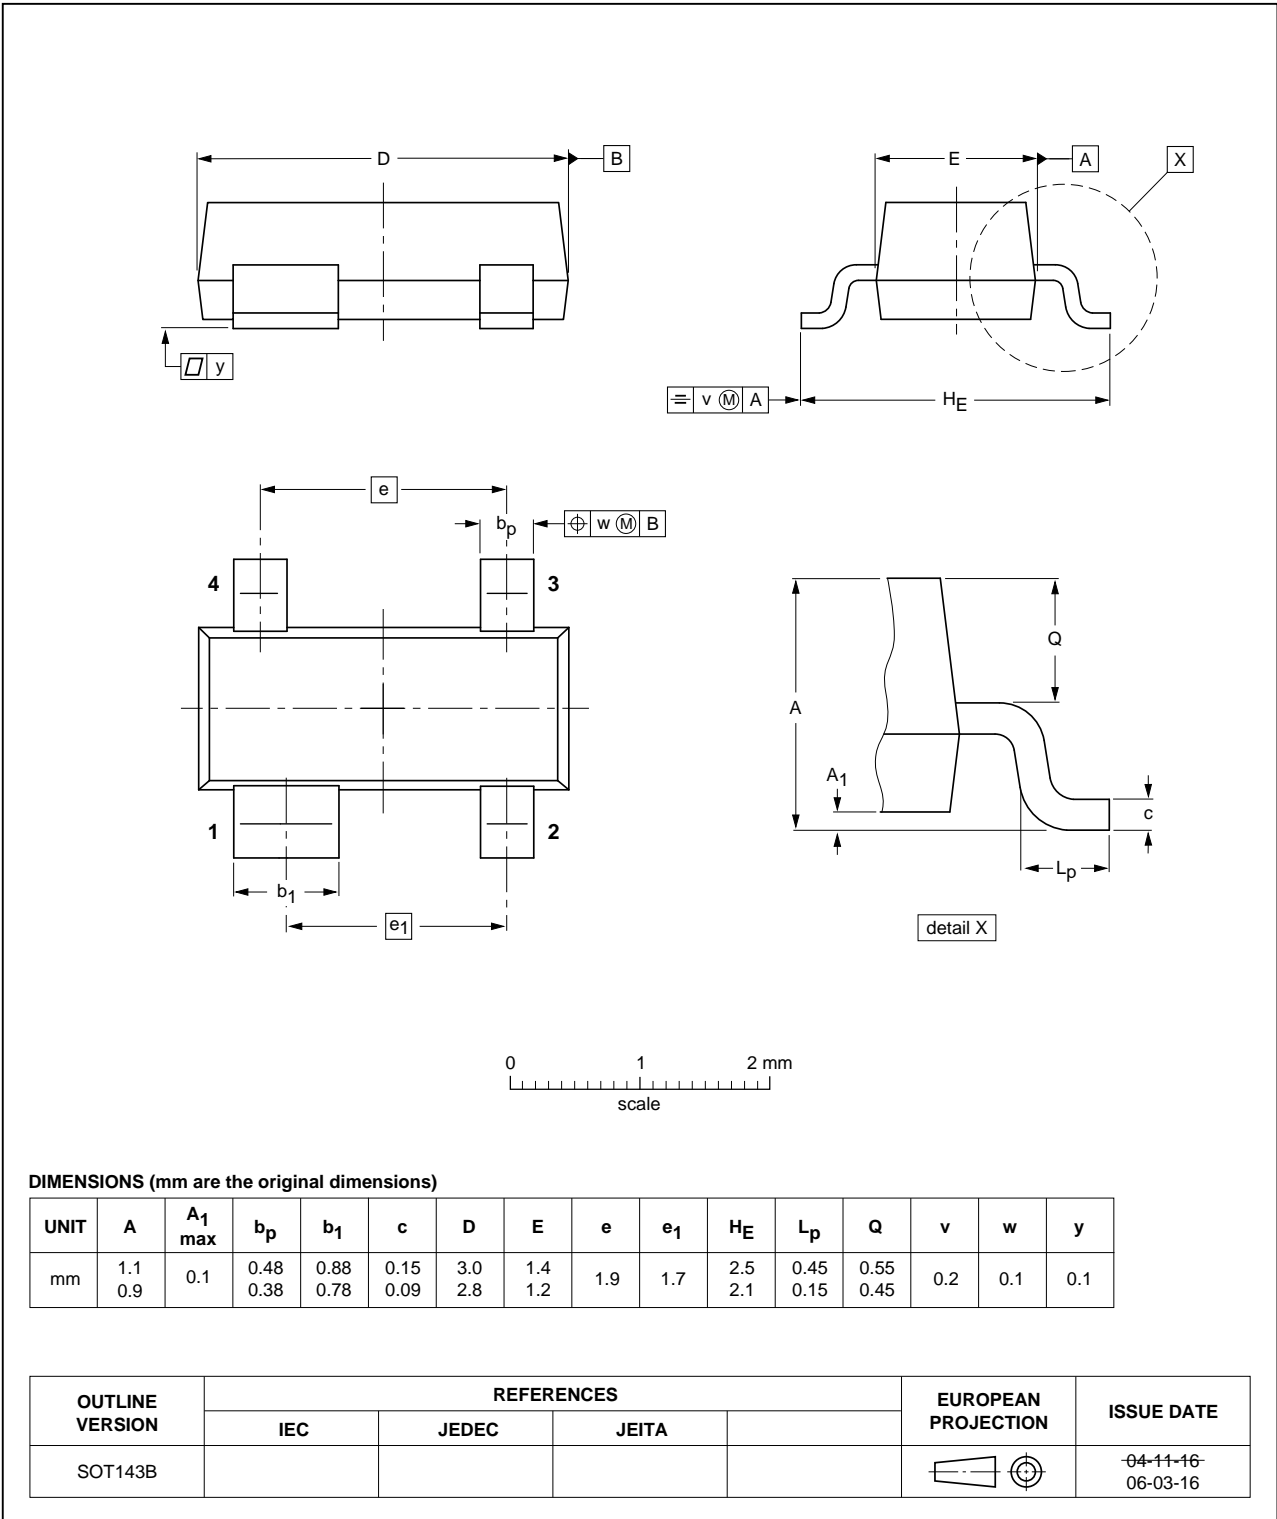


N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

Plastic surface-mounted package; reverse pinning; 4 leads

SOT143R

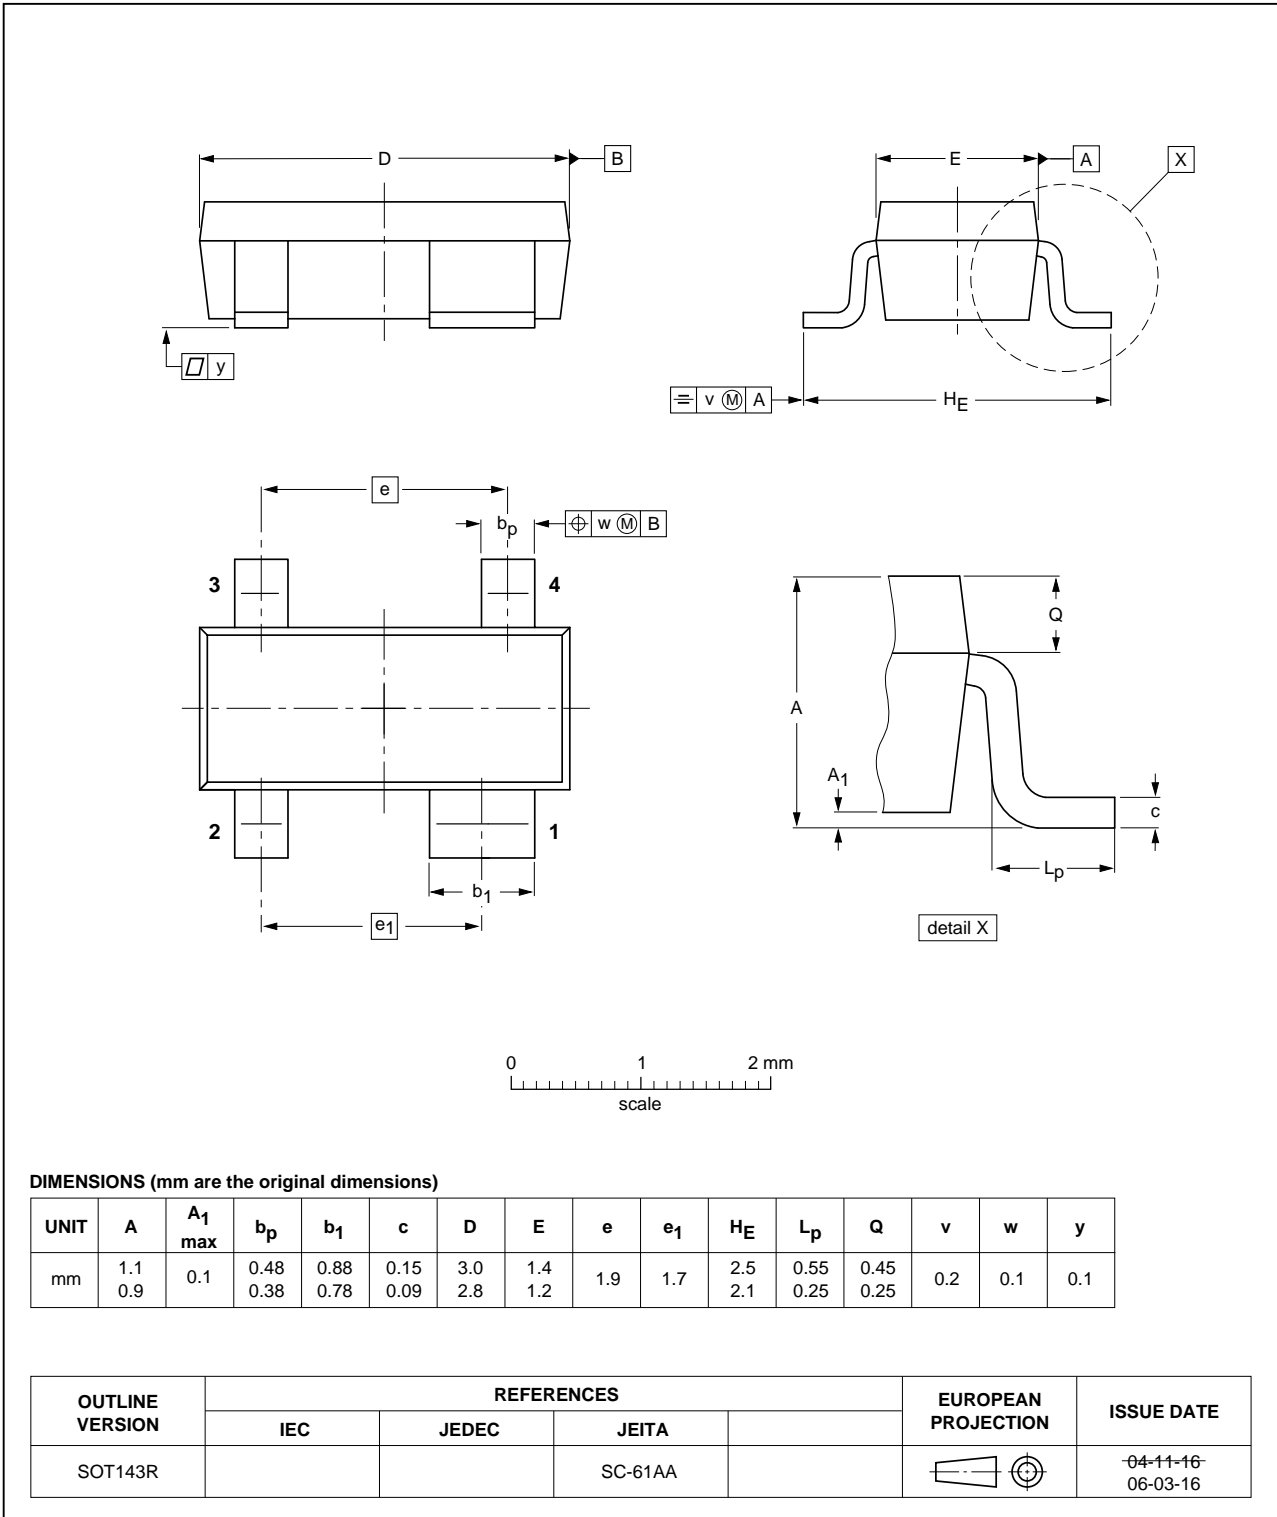


N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

Plastic surface-mounted package; reverse pinning; 4 leads

SOT343R

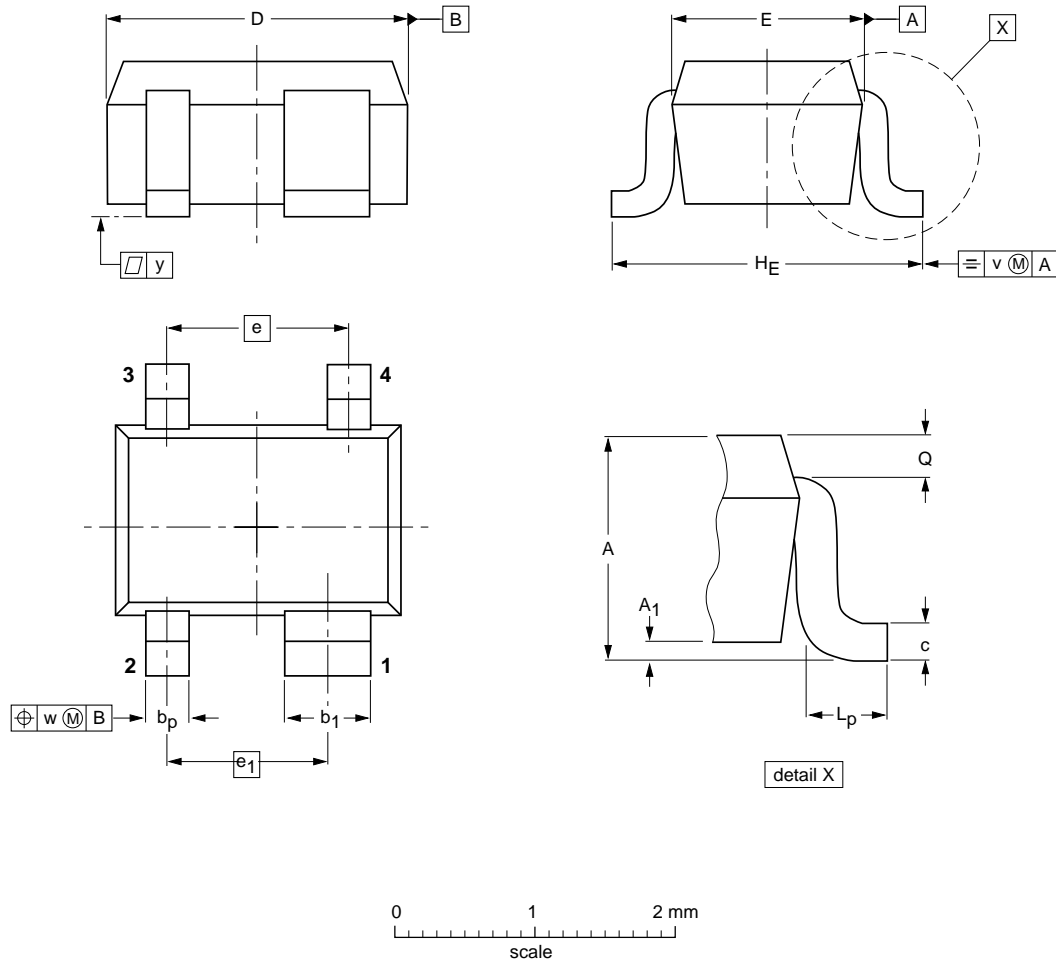

DIMENSIONS (mm are the original dimensions)

| UNIT | A          | A <sub>1</sub><br>max | b <sub>p</sub> | b <sub>1</sub> | c            | D          | E            | e   | e <sub>1</sub> | H <sub>E</sub> | L <sub>p</sub> | Q            | v   | w   | y   |
|------|------------|-----------------------|----------------|----------------|--------------|------------|--------------|-----|----------------|----------------|----------------|--------------|-----|-----|-----|
| mm   | 1.1<br>0.8 | 0.1                   | 0.4<br>0.3     | 0.7<br>0.5     | 0.25<br>0.10 | 2.2<br>1.8 | 1.35<br>1.15 | 1.3 | 1.15           | 2.2<br>2.0     | 0.45<br>0.15   | 0.23<br>0.13 | 0.2 | 0.2 | 0.1 |

| OUTLINE<br>VERSION | REFERENCES |       |      |  | EUROPEAN<br>PROJECTION | ISSUE DATE           |
|--------------------|------------|-------|------|--|------------------------|----------------------|
|                    | IEC        | JEDEC | EIAJ |  |                        |                      |
| SOT343R            |            |       |      |  |                        | 97-05-21<br>06-03-16 |

N-channel dual-gate PoLo MOS-FETs

BF1202; BF1202R; BF1202WR

**DATA SHEET STATUS**

| DOCUMENT STATUS <sup>(1)</sup> | PRODUCT STATUS <sup>(2)</sup> | DEFINITION  |
|--------------------------------|-------------------------------|---|
| Objective data sheet           | Development                   | This document contains data from the objective specification for product development. |
| Preliminary data sheet         | Qualification                 | This document contains data from the preliminary specification.                       |
| Product data sheet             | Production                    | This document contains the product specification.                                     |

**Notes**

1. Please consult the most recently issued document before initiating or completing a design.
2. The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

**DISCLAIMERS**

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe

property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

---

## N-channel dual-gate PoLo MOS-FETs

## BF1202; BF1202R; BF1202WR

---

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

# **NXP Semiconductors**

***provides High Performance Mixed Signal and Standard Product solutions that leverage its leading RF, Analog, Power Management, Interface, Security and Digital Processing expertise***

## **Customer notification**

This data sheet was changed to reflect the new company name NXP Semiconductors, including new legal definitions and disclaimers. No changes were made to the technical content, except for the marking codes and the package outline drawings which were updated to the latest version.

## **Contact information**

For additional information please visit: <http://www.nxp.com>

For sales offices addresses send e-mail to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

© NXP B.V. 2010

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF MOSFET Transistors](#) category:*

*Click to view products by [NXP](#) manufacturer:*

Other Similar products are found below :

[MRF166W](#) [MHT1006NT1](#) [FH2164](#) [MRFE8VP8600HR5](#) [BLF245](#) [BLF278](#) [ARF1511](#) [ARF465BG](#) [BF 2030 E6814](#) [BLF861A](#) [3SK263-5-TG-E](#) [VRF154FL](#) [MRF6S20010GNR1](#) [DU1215S](#) [DU28200M](#) [VRF150MP](#) [MMRF1015NR1](#) [MRF154](#) [MRF175LU](#) [MRF6S20010GNR1](#) [UF28100M](#) [MW6S010GNR1](#) [MW6S010GNR1](#) [DU2820S](#) [SD2943W](#) [SD2932BW](#) [SD2941-10W](#) [MRF24301HR5](#) [ARF469AG](#) [ARF463BP1G](#) [MMRF1019NR4](#) [MHT1008NT1](#) [MMRF1014NT1](#) [MRF426](#) [MRF422](#) [BLW96](#) [ARF468AG](#) [VRF161MP](#) [ARF468BG](#) [MRFE6VP61K25NR6](#) [MRFE6VP5300NR1](#) [A2T27S020NR1](#) [MMRF1304NR1](#) [MRFE6S9060GNR1](#) [MMRF1008GHR5](#) [A2T27S007NT1](#) [AFT09MP055NR1](#) [DU2860U](#) [MHT1803A](#) [D2081UK.F](#)