


MRG2130

Infrastructure Cables
Radio-frequency coax
Coax RG213 type PVC

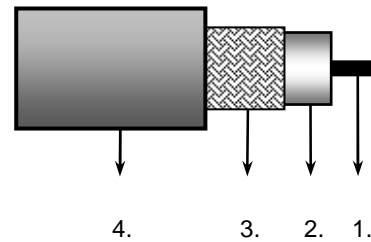

Applications

- Coaxial cable used in cable broadband communication networks designed according European Standard EN 50117-1
- Operating frequencies between 5 and 3000 MHz
- Designed for in building applications

General Standards

- European standard EN 50117-1 and EN 50117-2-1
- European standard EN 50290-2-20
- International standard IEC 1196

Construction & Dimensions

1. Inner conductor	
Material	stranded bare copper
Construction	7 x 0.75 mm
Diameter	2.25 mm ± 0.03 mm
2. Dielectric	
Material	Solid PE
Diameter	7.25 mm ± 0.2 mm
3. Braid	
Material	Copper
Diameter	8.0 mm ± 0.25 mm
Coverage braid	92 % ± 5 %
4. Sheath	
Material	PVC
Diameter	10.3 mm ± 0.3 mm

Mechanical characteristics

Parameter	Specification	Unit
Tensile strength of sheath	≥ 12.5	N/mm ²
Elongation at break of sheath	≥ 150	%
Storage/operating temperature	-40 to + 70	°C
Minimum installation temperature	-5	°C
Minimum static bend radius	50	mm
Flame propagation according IEC 60332-1-2	Pass	

Electrical characteristics

Parameter	Specification	Unit
Mean characteristic impedance	50 ± 2	Ω
Regularity of impedance	> 46	dB
DC resistance inner conductor	≤ 6.0	Ω/km
DC resistance outer conductor	≤ 5.5	Ω/km
Capacitance	100 ± 3	pF/m
Velocity ratio	0.66	
Insulation resistance	>10 ⁴	MΩ.km
Voltage test of dielectric	>3	kVdc
Return loss at		
	100-400 MHz	≥ 28.5 ^a
	400-900 MHz	≥ 23.5 ^a
^a Maximum 3 peak return loss values up to 4dB lower are permissible		

Attenuation at:	Nominal	Unit
5 MHz:	1.5	dB/100m
50 MHz:	4.6	dB/100m
100 MHz:	6.6	dB/100m
230 MHz:	10.4	dB/100m
400 MHz:	14.1	dB/100m
800 MHz:	21.1	dB/100m

Attenuation at:	Nominal	Unit
862 MHz:	22.1	dB/100m
1000 MHz:	24.1	dB/100m
1350 MHz:	29.0	dB/100m
1750 MHz:	34.3	dB/100m
2150 MHz:	39.1	dB/100m
2400 MHz:	42.4	dB/100m

Maximum attenuation is 10 % higher.



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Belden](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [633948-877-1000](#) [CY2389-000](#) [8213-010-1000](#) [8221-010-U1000](#) [8233-010-1000](#) [88281-010-500](#) [1322R-010-1000](#) [177799-000](#) [1807A-B59-U1000](#) [9167-010-1000](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [9659-010-1000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [8-1616396-1](#) [8263-010-U1000](#) [8263 010U500](#) [8268-010-500](#) [8262 010U1000](#) [7915A 009U1000](#) [5024A1311-0](#) [TRC-75-1](#) [1281S5 010250](#) [1281S5 000250](#) [1530A 010U1000](#) [1505A 0081000](#) [9248 010U1000](#) [CO-142BNCX200-001](#) [7809WB 010500](#) [9244 0101000](#) [1694A 0081000](#) [9204 0101000](#) [8241F J5C1000](#) [1530A 0101000](#) [1674A TIN50](#) [7915A 0091000](#) [7915A 010500](#) [TWCH-78-2](#) [TWC-78-1](#)