

5mm Round Standard T-1 3/4 Type Infrared LED Technical Data Sheet

Part No.: LL-503SIRC2E-1BD

Page: 1 OF 8

http://www.luckylight.cn



Features:

- ♦ Standard T-1 3/4 diameter package.
- \diamond Low forward voltage.
- \diamond Viewing angle=30°.
- \diamond Reliable and rugged.
- $\diamond~$ The product itself will remain within RoHS complaint Version.

Descriptions:

 \diamond The device is spectrally matched with silicon photodiode and phototransistor.


Applications:

- \diamond Floppy disk drive.
- \diamond Optoelectronic switch.
- \diamond Camera.
- \diamond Free air transmission system.
- \diamond Video.

Page: 2 OF 8



Package Dimension:

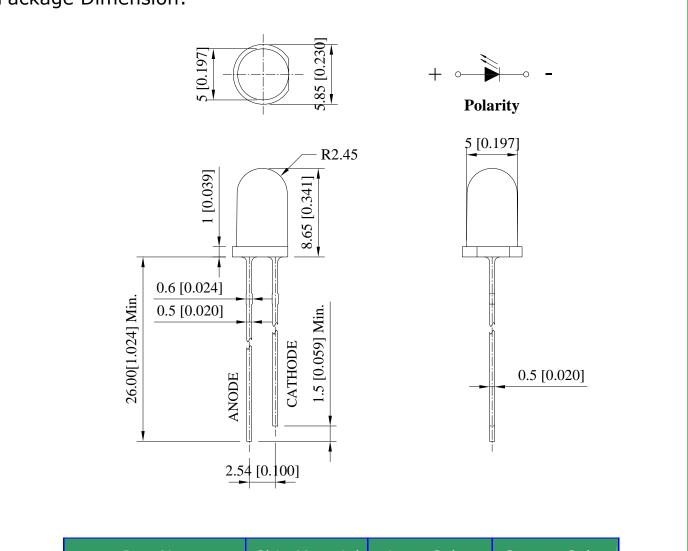

Part No.	Chip Material	Lens Color	Source Color
LL-503SIRC2E-1BD	GaAlAs	Water Clear	Infrared

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is \pm 0.25 mm (.010") unless otherwise specified.
- 3. Protruded resin under flange is 1.00 mm (.039") max.
- 4. Specifications are subject to change without notice.



Absolute Maximum Ratings at Ta=25℃

Parameters	Symbol	Max.	Unit
Power Dissipation	PD	150	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	1.00	А
Forward Current	IF	100	mA
Reverse Voltage	VR	5	V
Operating Temperature Range	Topr	-40℃ to +80℃	
Storage Temperature Range	Tstg	-40℃ to +85℃	
Soldering Temperature	Tsld	260℃ for 5 Seconds	

Electrical Optical Characteristics at $Ta=25^{\circ}C$

Parameters	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Radiant Intensity (Note 1) *	Ee	7.8	15.0			IF=20mA
			35.0		mW/sr	I _F =100mA, tp=100µs, tp/T=0.01
Viewing Angle (Note 2) *	201/2		30		Deg	IF=20mA
Peak Emission Wavelength	λр		850		nm	IF=20mA (Note 3)
Spectral Bandwidth	$ riangle \lambda$		45		nm	IF=20mA
Forward Voltage	VF	1.00	1.45	1.65		IF=20mA
			1.60	1.85	V	I _F =100mA, tp=100µs, tp/T=0.01
Reverse Current	IR			10	μA	V _R =5V

Notes:


1. Luminous (Radiant) Intensity Measurement allowance is \pm 10%.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.


3. The dominant wavelength (λp) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Page: 4 OF 8



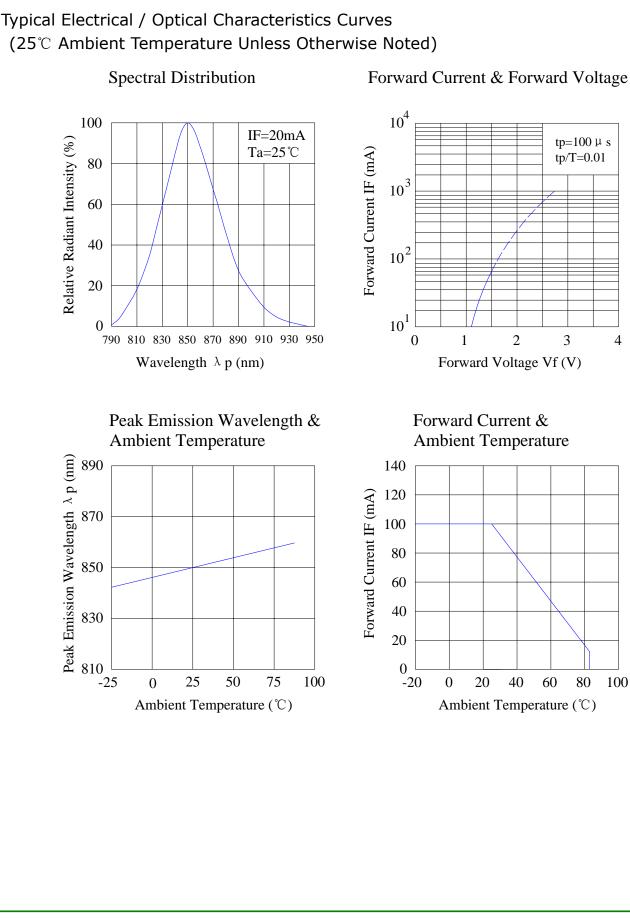



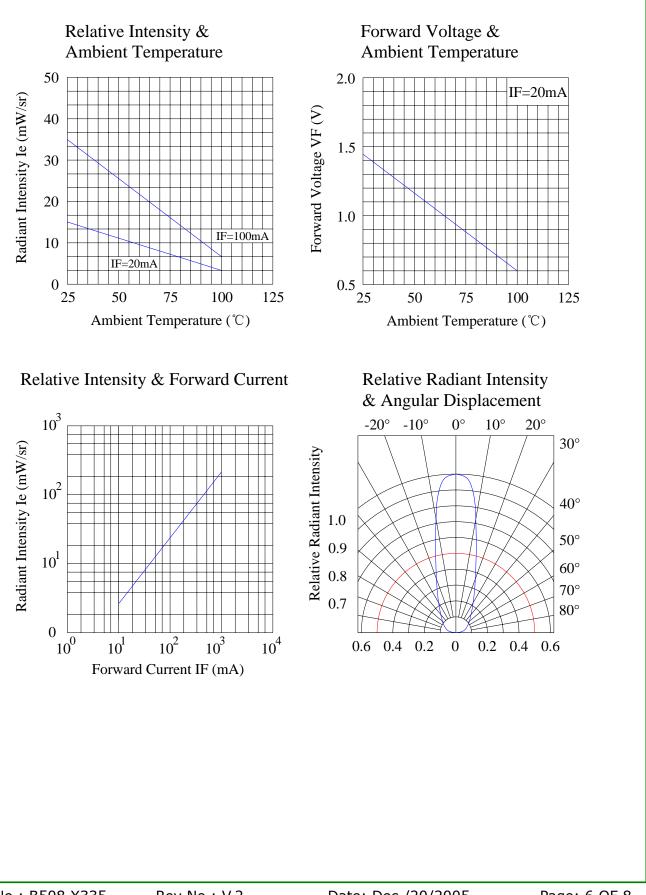





Reliability Test Items And Conditions:

The reliability of products shall be satisfied with items listed below:

Confidence level: 90%.

LTPD: 10%.

No.	Item	Test Conditions	Test Hours/ Cycles	Sample Sizes	Failure Judgment Criteria	Ac/ Re		
1	Reflow Soldering	TEMP.: 260℃ <u>+</u> 5℃ 5secs	6mins	22pcs	IR≧U*2 Ee≦L*0.8 VF≧U*1.2 U: Upper Specification Limit L: Lower Specification Limit	0/1		
2	Temperature Cycle	H: +100℃ 15mins ∫ 5 mins ∫ L: -40℃ 15mins	50Cycles	22pcs		0/1		
3	Thermal Shock	H: +100℃ 15mins ∫ 10mins ∫ L: -10℃ 5mins	50Cycles	22pcs		0/1		
4	High Temperature Storage	TEMP.: +100 ℃	1000hrs	22pcs		0/1		
5	Lower Temperature Storage	TEMP.: -40℃	1000hrs	22pcs		0/1		
6	DC Operating Life	V _{CE} =5V	1000hrs	22pcs		0/1		
7	High Temperature/ High Humidity	85℃ / 85% R.H	1000hrs	22pcs		0/1		



Please read the following notes before using the product:

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the LEDs should be kept at 30 $^\circ\!\!\mathbb{C}$ or less and 90% RH or less.

2.3 The LEDs should be used within a year.

2.4 After opening the package, the LEDs should be kept at 30° C or less and 70% RH or less.

2.5 The LEDs should be used within 168 hours (7 days) after opening the package.

3. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260° C for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

4. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Infrared Emitters - High Power category:

Click to view products by Lucky Light manufacturer:

Other Similar products are found below :

IR19-315C/TR8 SFH 4030 SFH 4060 HSM8-V380 HSM9-V380 SFH 5750 PK2S-2KJE-A PK2S-2LJE-A PK2S-3KJE-A PK2S-3KKE-A PK2S-3LJE-A PK2S-4KJE-A AREQ-90C0-00000 AREQ-80C0-00000 SFH 4775S A01 SST-10-IRD-B90H-S810 SFH 4727A SFH 4726AS SFH 4717AS AREQ-8020-00000 HR5P-N3FB-00000 HR5P-N2FB-00000 HR5P-N3CB-00000 HR5P-N3CB-00000 HR5P-N3CA-00000 HR5P-N2CB-00000 HR5P-N3CA-00000 HR5P-N2CA-00000 HR5P-N2FA-00000 HR5P-N3FA-00000 VSMY2853SLX01 VSMY2853RGX01 VSMY2853GX01 VSMY2850GX01 IN-P281ASGHIR IN-P281ASGIR QEE123 HSDL-4400#011 C3535SIR2C-2B KM-4457F3C L-53F3BT VTE1291W-2H LL-304IRC4B-2AD LL-503HIRT2E-1CC LL-503IRC2E-2AC LL-503IRC2V-2AD LL-503IRT2E-2AC LL-503IRT2E-2AE LL-503SIRC2E-1BD LL-503IRC2H-1BE LL-S170IRC-2A SFH 4259