



# YIC Ceramic Resonator (ZTT/ZTTCC/ZTTCR/ZTTCE/ZTTCV/ZTTCW Series)

## ZTT Series of Ceramic Resonator

1.80 - 50.00MHz




ZTTxx.xxMG Series




ZTTxx.xxMT Series

### TEST CIRCUIT FOR MOS IC

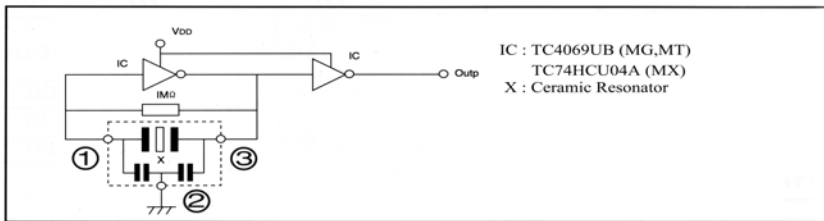


### TECHNICAL CHARACTERISTICS

Part Number	Ferquency Range (MHz)	Ferquency Accuracy (25°C)	Stability Temperature (-20 ~ +80°C) max.(%)	Operating Temperature (°C)	Aging For Ten Year (%)
ZTT□□□MG	1.80 - 6.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTT□□□MT	6.00 - 13.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTT□□□MX	13.01 - 50.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTRS□□□MG	6.00 - 12.50	±0.5	±0.3	-25 ~ +85	±0.3
ZTTRS□□□MX	16.00 - 50.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTWS□□□MG	1.80 - 6.00	±0.5	±0.3	-25 ~ +85	±0.3



ZTTRSxx.xxMG,MX Series




ZTTWSx.xxMG Series


## ZTT - SMD Series of Ceramic Resonator

1.80 - 50.00MHz


### DIMENSIONS




ZTTCCx.xxMG Series




ZTTCRx.xxMG Series



ZTTCEx.xxMG Series




ZTTCSxx.xxMT,MX Series  
ZTTCVxx.xxMT,MX Series



ZTTCWxx.xxMX Series

- ① Input
- ② Ground
- ③ Output

### RECOMMENDED LAND PATTERN

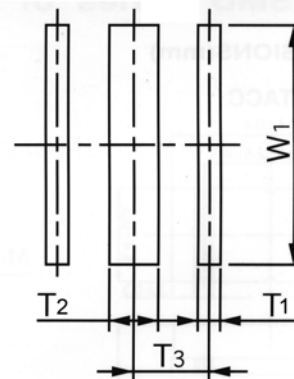

Part Number	Size Code	Dimensions (mm)			
		T1	T2	T3	W1
ZTTCC□□□MG		1.5±0.3	1.7±0.3	2.5±0.3	4.0±0.3
ZTTCR□□□MG		0.8±0.2	0.8±0.2	1.5±0.2	2.6±0.2
ZTTCE□□□MG		0.4±0.2	0.4±0.2	1.2±0.2	2.0±0.2
ZTTCS□□□MT/MX		0.8±0.2	1.3±0.2	1.95±0.2	5.1±0.2
ZTTCV□□□MT/MX		0.7±0.2	1.0±0.2	1.5±0.2	4.1±0.2
ZTTCW□□□MX		0.5±0.2	0.5±0.2	1.0±0.2	2.6±0.2

### TECHNICAL CHARACTERISTICS

Part Number	Ferquency Range (MHz)	Ferquency Accuracy (25°C)	Stability Temperature (-20 ~ +80°C) max.(%)	Operating Temperature (°C)	Aging For Ten Year (%)
ZTTCC□□□MG	2.00 - 8.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTCR□□□MG	4.00 - 8.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTCE□□□MG	8.00 - 12.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTCS□□□MT	6.00 - 13.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTCV□□□MT	6.00 - 13.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTCS□□□MX	13.01 - 50.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTCV□□□MX	16.00 - 50.00	±0.5	±0.3	-25 ~ +85	±0.3
ZTTCW□□□MX	20.00 - 50.00	±0.5	±0.3	-25 ~ +85	±0.3

Note: A stands for thickness of the ceramic element, which varies with the frequency. The range of the thickness is 0.1 to 0.7 mm.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resonators](#) category:*

*Click to view products by [YIC](#) manufacturer:*

Other Similar products are found below :

[B39431R820H210](#) [CSAC2.00MGCM-TC](#) [ECS-HFR-40.00-B-TR](#) [CSTLS4M00G53Z-A0](#) [ZTB455E](#) [ECS-CR2-16.00-A-TR](#) [ECS-HFR-20.00-B-TR](#) [ECS-CR2-20.00-A-TR](#) [RO3164E-3](#) [ASR418S2-T](#) [CSTNE10M0G520000R0](#) [CSTLS8M00G53093-A0](#) [CSTNE12M0G52A000R0](#) [CSTLS18M4X54-A0](#) [CSTLS16M9X53Z-B0](#) [CSTLS24M0X51-A0](#) [CSTLS25M0X51-B0](#) [CSTLS18M0X51-B0](#) [CSTLS4M00G53093-A0](#) [CSTLS18M4X53-A0](#) [CSTNE16M0V510000R0](#) [CSTLS30M0X53-B0](#) [CSTLS33M8X53-B0](#) [CSTLS16M9X53-A0](#) [CSTLS6M40G56-B0](#) [CSTLS6M25G56-A0](#) [CSTNE14M7V510000R0](#) [CSTLS18M4X53-B0](#) [CSTLS33M0X51-B0](#) [CSTLS5M50G56-B0](#) [7B008000I01](#) [7D038400I01](#) [TAXM24M2ILDBET2T](#) [TAXM26M2IHDBET2T](#) [146-32.768-12.5-20-20/A](#) [3225-24.00-12-10-10/A](#) [7B009843M01](#) [CF4016M00009T8188042](#) [S32400001B0730D1JB](#) [X252016MLB4SI](#) [Q24FA20H00389](#) [CSTLS16M0X54-B0](#) [CSTLS4M19G56-B0](#) [9AC04194152080D2JB](#) [CST3.58MGW](#) [CSTCR4M91G55B-R0](#) [CSTLS3M68G56-B0](#) [S2100327072090](#) [FC-12M32.768KHZ9PF20PPM](#) [ASR433.42E-T](#)