1000 Series

Pulse Transformers



muRata 🗜

FEATURES

- RoHS compliant
- UL 94V-0 Package Material
- Isolation to 4kVrms
- Compact Footprint
- PCB Mounting
- Backward compatible with Sn/Pb soldering systems

DESCRIPTION

The 1000 series are intended for wideband and pulse operations. They are also suitable for signal isolation and use in small isolated power supplies. The compact footprint makes them ideal for applications where space is at a premium.

SELECTION GUIDE ¹											
Order Code	Turns Ratio ±2%	Min. Primary Inductance	: Min. Primary Constant, E_{T}	Max. Leakage Inductance	Max. Interwinding Capacitance	Max. DC Resistance Primary Winding	Max. DC Resistance Secondary 1 winding		k Isolation Voltage	Pin Connection Style	Mechanical Dimensions
		mH	Vµs	μH	pF	Ω	Ω	Ω	Vrms	д_	20
1001C	1:1	3.0	200	32	23	1.2	1.0	-	2000	А	2
1002C	1:1:1	3.0	200	30	51	1.4	1.3	1.7	2000	В	1
1003C	2:1:1	12	400	62	58	5.0	2.0	3.0	2000	В	1
1007C	1:1:1	7.4	310	20	55	2.9	2.5	3.4	2000	В	1
1009C	1:1:1	22	550	85	71	13.4	11	15.8	2000	В	1
1013C	1:1:1	3.0	200	3	585	2.0	2.0	2.0	500VDC	В	1
1016C	1:1	3.0	200	22	23	1.2	1.0	-	3500	А	2
1017C	1:1	0.8	130	4	20	0.4	0.3	-	4000	А	2
1024C	1.2CT:1CT	8.8	340	60	25	2.5	2.5	-	2000	С	1
1025C	2:1:1	24	570	90	83	8.7	3.5	5.2	2000	В	1
1026C	1:1:1	6.0	285	30	62	4.0	4.0	4.9	2000	В	1
1082C	100:1	6.1	280	-	6	1.1	0.1	-	2000	А	2

ABSOLUTE MAXIMUM RATINGS


Operating free air temperature range Storage temperature range 0°C to 70°C -60°C to 125°C

SOLDERING INFORMATION ¹				
Peak wave solder temperature	300°C for 10 seconds			
Pin finish	Matte tin			

PILITINIS

1 For further information, please visit www.murata-ps.com/rohs All specifications typical at $T_a=25^{\circ}$ C.

TUBE DIMENSIONS

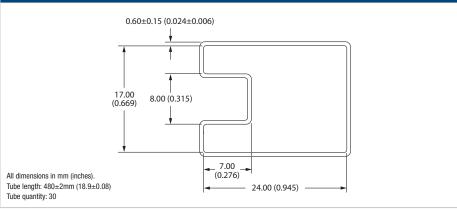




www.murata-ps.com/support

muRata Ps Murata Power Solutions

1000 Series

Pulse Transformers

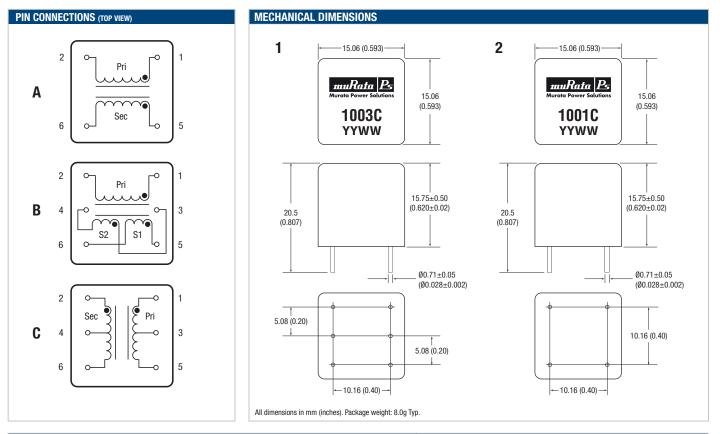

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

All products in this series are 100% production tested at their stated isolation voltage.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the insulative materials used. Such materials are susceptible to chemical degradation when subject to very high applied voltages. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.



This product is subject to the following <u>operating requirements</u> and the <u>Life and Safety Critical Application Sales Policy</u>: Refer to: http://www.murata-ps.com/requirements/

Murata Power Solutions, inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. @ 2018 Murata Power Solutions, Inc.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pulse Transformers category:

Click to view products by Murata manufacturer:

Other Similar products are found below :

IF-18-0269-N PHT-068 PT5010 PE-65457NLT T60403-D4721-X088 H1183NLT CTX33-18971-R HM2108NLT PA1825NLT HM0068ANLT PE-6292 P0584ANL CX2044LNL PG1427.001NLT 750313723 TGMR-512V6LF HM1331NL TGMR-430V8LF TGMR-501V6LF 76615/1C B82804A0304A225 TGM-040P3RL TGMR-Q440V8LF TGM-450NFRL IT 238 HM41-11210LF TGM-210NSRL TGM-240NSRL TGM-240NSLF TGM-030P3RL CTX16-17360 ITNA-0239-D202 TGM-H280V8LF TGM-340NARL T60403-D4097-X052 ITRB-0239-D502 TGM-H240V8LF 78601/2JC-R TGAD-292NARL HX6096NLT 78601/2MC-R T60403-D4215-X177 78613/1JC 600PA H1183NL TGMR-502V6LF CTX02-13664 TGMR-380V6LF T60403-F5046-X008 TGM-H260V8LF