



5SDD 71X0400

Old part no. DS 808X-7110-04

Welding diode

Properties

- High forward current capability
- Low forward and reverse recovery losses
- High operational reliability

Applications

- Welding equipment
- High current application up to 2000 Hz

Key parameters

V_{RRM}	=	400	V
I_{FAVm}	=	7 110	A
I_{FSM}	=	55 000	A
V_{TO}	=	0.740	V
r_T	=	0.026	mΩ

Types

type	V_{RRM}
5SDD 71X0400	400 V
Conditions:	$T_j = -40 \div 170^\circ\text{C}$, half sine waveform, $f = 50\text{ Hz}$

Mechanical data

F_m	Mounting force	$22 \pm 2\text{ kN}$
m	Weight	0.14 kg
D_s	Surface creepage distance	4 mm
D_a	Air strike distance	4 mm

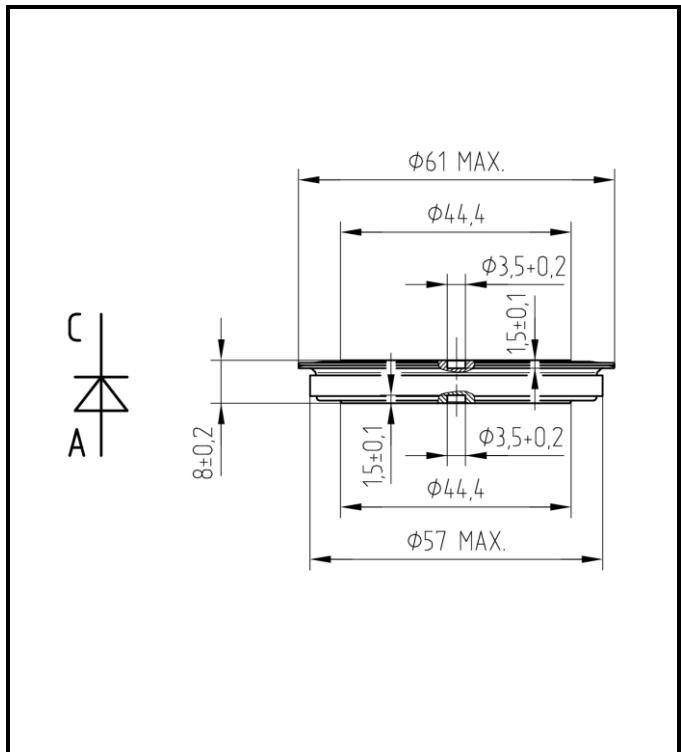


Fig. 1 Case



ABB s.r.o.

Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic
tel.: +420 261 306 250, <http://www.abb.com/semiconductors>

Maximum Ratings		Maximum Limits	Unit
V_{RRM}	Repetitive peak reverse voltage $T_j = -40 \div 170 \text{ }^\circ\text{C}$	400	V
I_{FAVm}	Average forward current $T_c = 85^\circ\text{C}$	7 110	A
I_{FRMS}	RMS forward current $T_c = 85^\circ\text{C}$	11 200	A
I_R	Repetitive reverse current $V_R = V_{RRM}$	50	mA
I_{FSM}	Nonrepetitive peak surge current $t_p = 10 \text{ ms}, V_R = 0 \text{ V, half sine pulse}$	55 000	A
$\int I^2 t$	Limiting load integral $t_p = 10 \text{ ms}, V_R = 0 \text{ V, half sine pulse}$	15 125 000	A ² s
$T_{jmin} - T_{jmax}$	Operating temperature range	- 40 \div 170	$^\circ\text{C}$
$T_{stgmin} - T_{stgmax}$	Storage temperature range	- 40 \div 170	$^\circ\text{C}$

Unless otherwise specified $T_j = 170 \text{ }^\circ\text{C}$

Characteristics		Value			Unit
		min	typ	max	
V_{TO}	Threshold voltage			0.740	V
	Forward slope resistance $I_{F1} = 5 \text{ 000 A}, I_{F2} = 15 \text{ 000 A}$			0.026	mΩ
V_{FM}	Maximum forward voltage	$I_{FM} = 5 \text{ 000 A}, T_j = 25 \text{ }^\circ\text{C}$	0.97	1.02	V
		$I_{FM} = 5 \text{ 000 A}$		0.87	
Q_{rr}	Recovered charge $I_{FM} = 1000 \text{ A}, di/dt = -30 \text{ A}/\mu\text{s}, V_R = 50 \text{ V}$		300		μC

Unless otherwise specified $T_j = 170 \text{ }^\circ\text{C}$

Thermal Specifications		Value	Unit	
R_{thjc}	Thermal resistance junction to case	<i>double side cooling</i>	10	K/kW
		<i>single side cooling</i>	20	K/kW
R_{thch}	Thermal resistance case to heatsink	<i>double side cooling</i>	5	K/kW
		<i>single side cooling</i>	10	K/kW

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

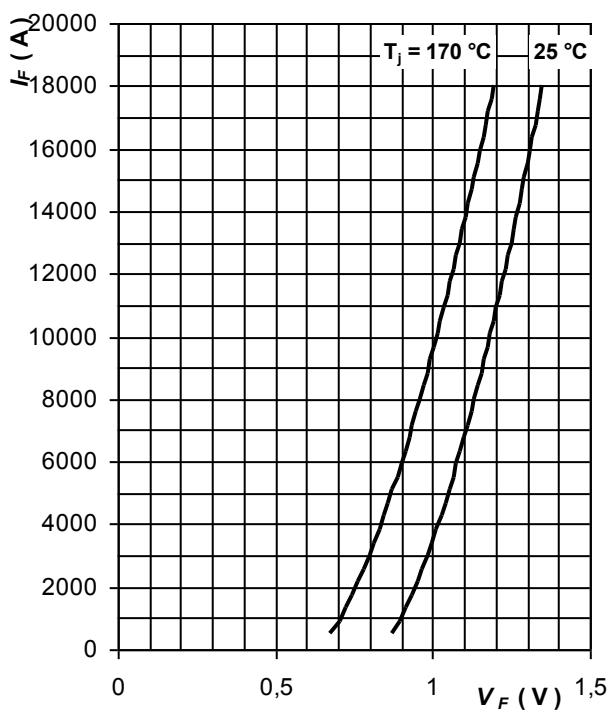
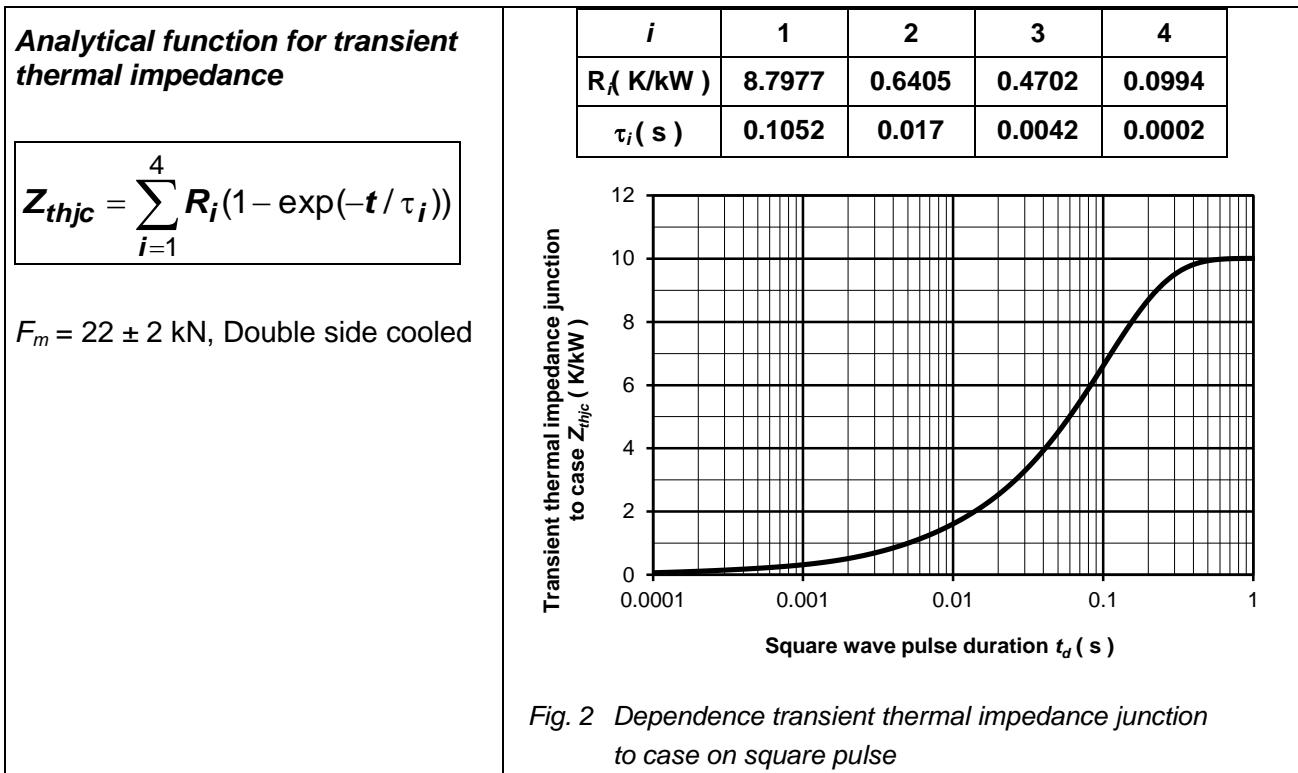


Fig. 3 Maximum forward voltage drop characteristics

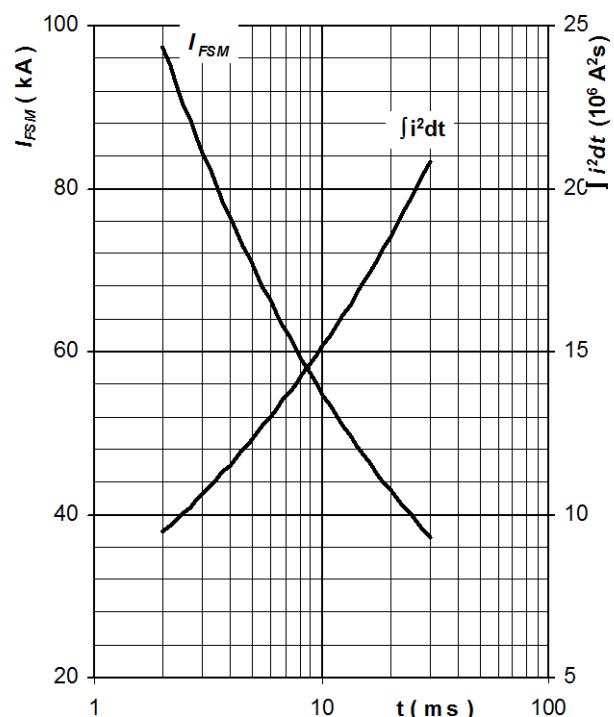


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse, $V_R = 0$ V, $T_j = T_{jmax}$

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

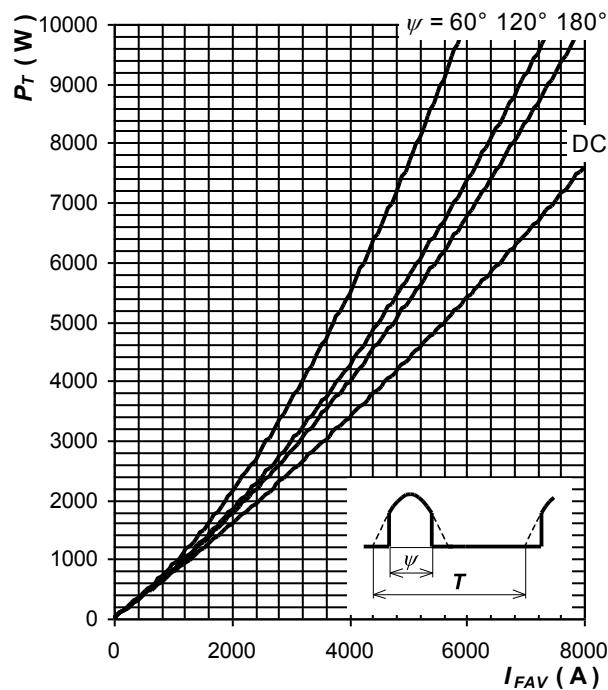


Fig. 5 Forward power loss vs. average forward current, sine waveform, $f = 50$ Hz

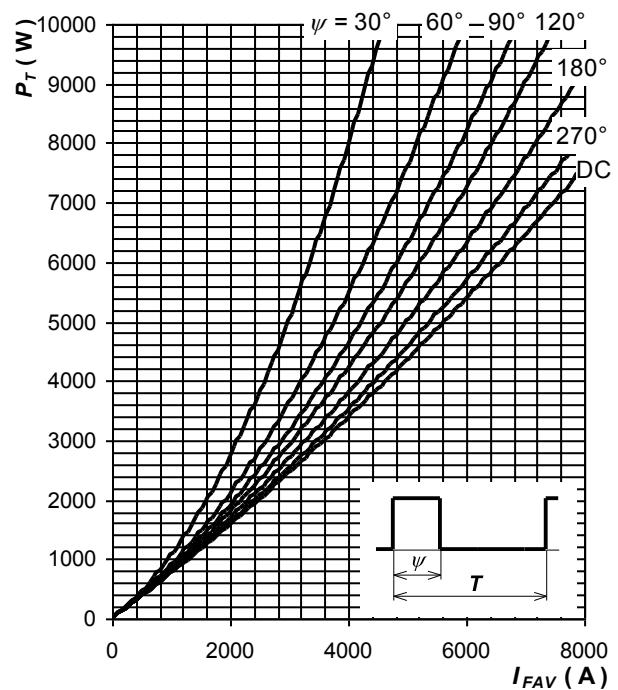


Fig. 6 Forward power loss vs. average forward current, square waveform, $f = 50$ Hz

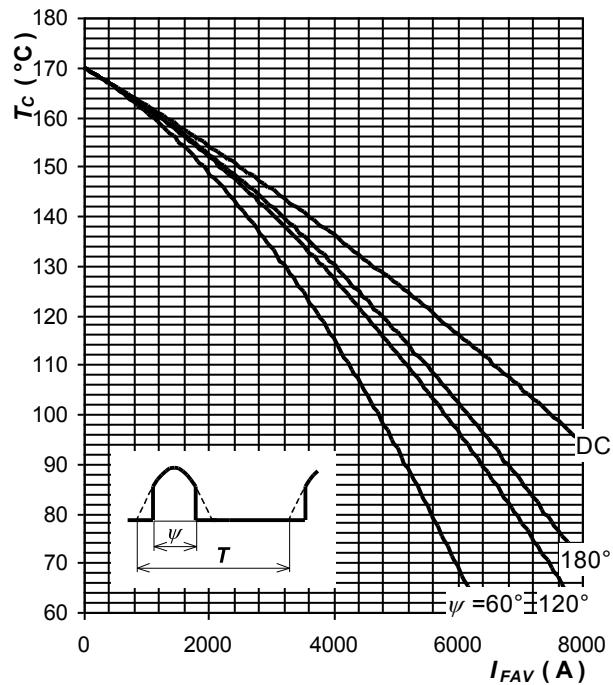


Fig. 7 Max. case temperature vs. aver. forward current, sine waveform, $f = 50$ Hz






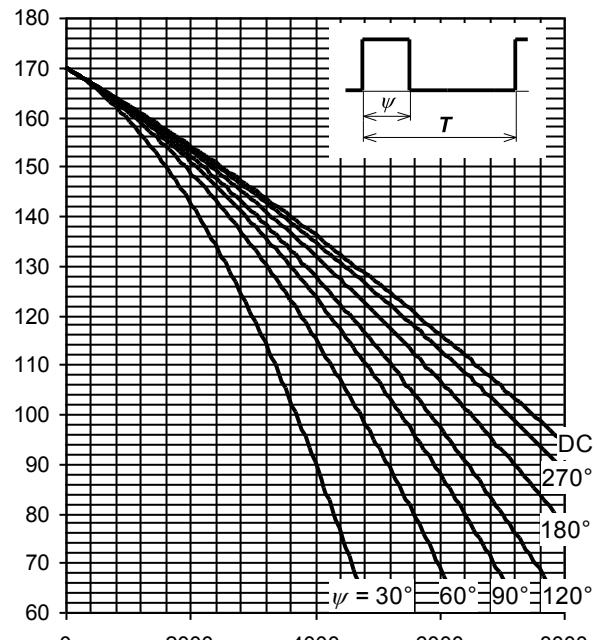



Fig. 8 Max. case temperature vs. aver. forward current, square waveform, $f = 50$ Hz

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

Fig. 9 Definition of ED for typical welding sequenceFig. 10 Definition of I_D for single-phase centre tapFig. 11 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 80$ °CFig. 12 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000$ Hz, square wave, $\Delta T_j = 70$ °C

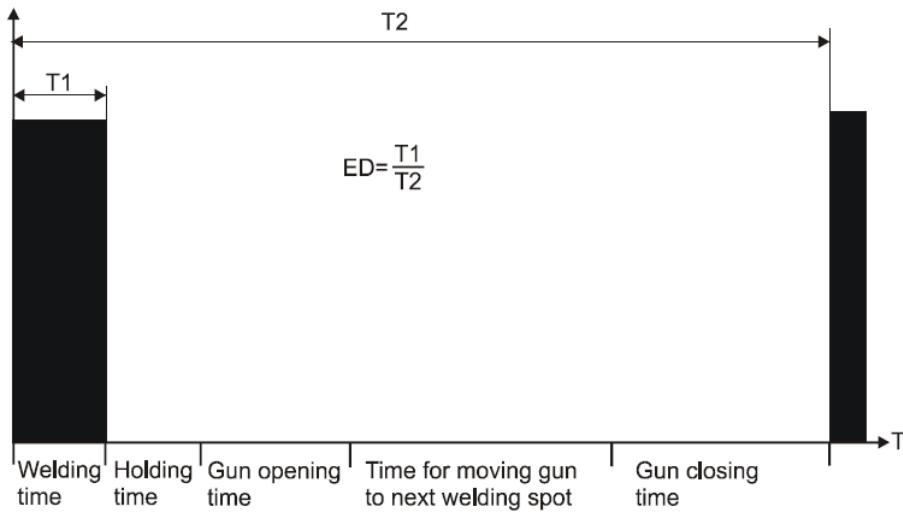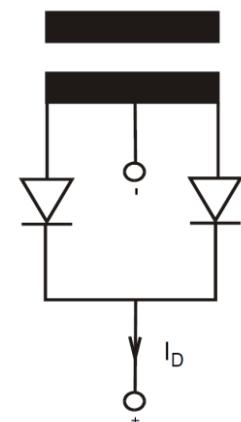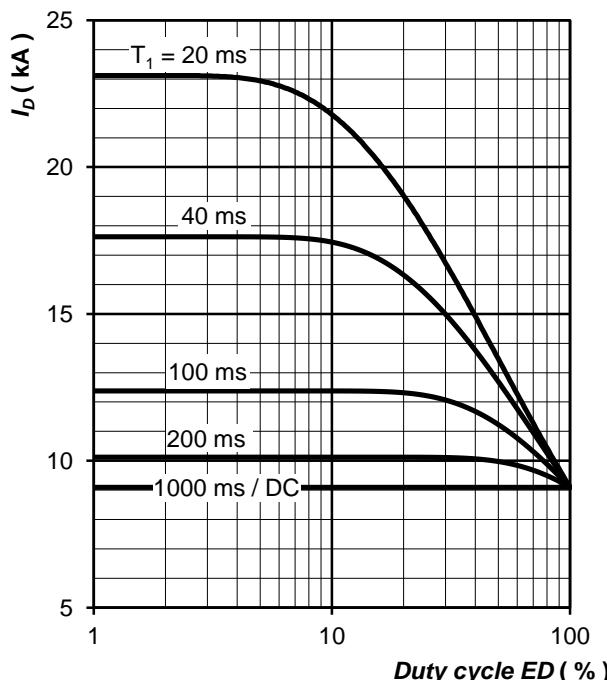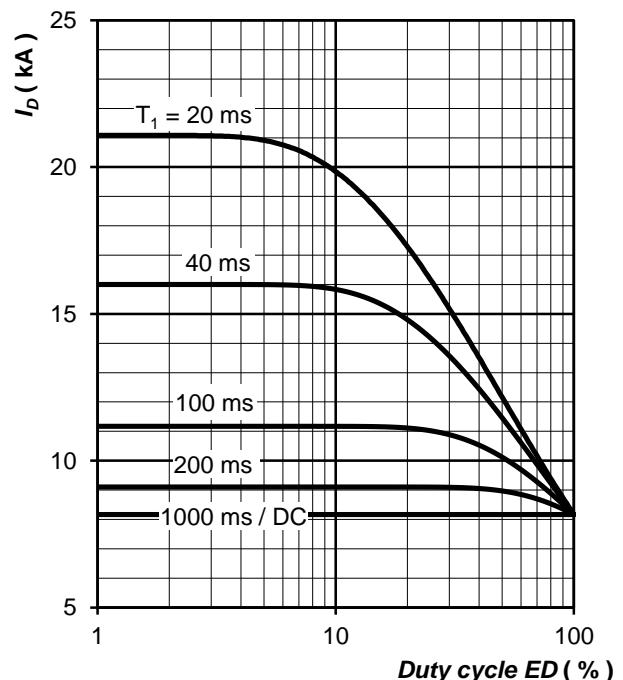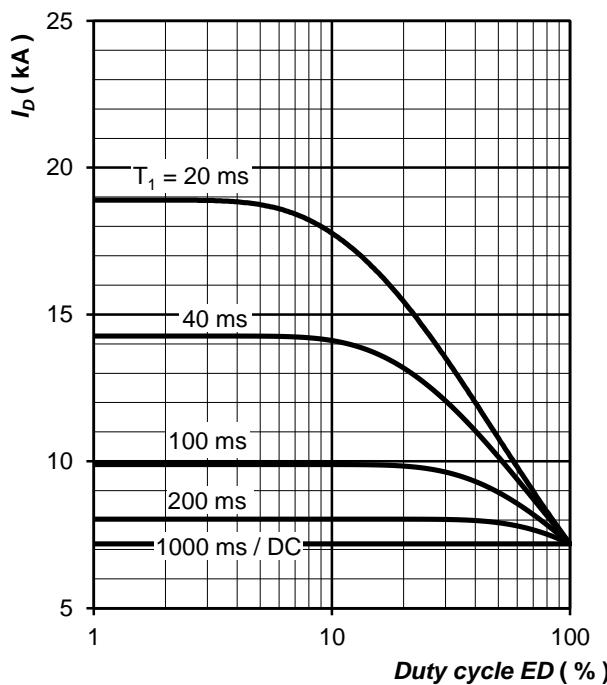

*Fig. 13 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000 \text{ Hz}$, square wave, $\Delta T_j = 60 \text{ }^{\circ}\text{C}$*

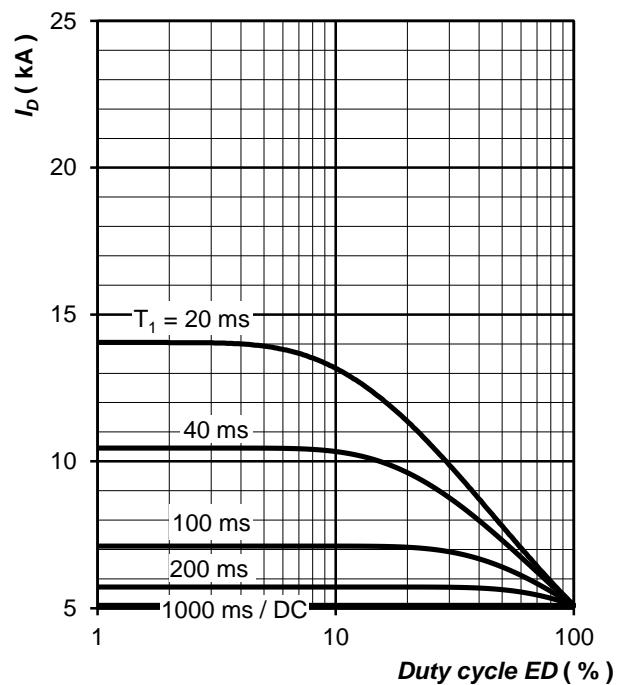

*Fig. 14 Current load capacity, cont.,
DC output welding current with single-phase
centre tap vs. duty cycle
 $f = 1000 \text{ Hz}$, square wave, $\Delta T_j = 40 \text{ }^{\circ}\text{C}$*

Notes:

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by ABB manufacturer:

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RGP30G-E373](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMBD7000LT3G](#) [1N4449](#) [1N4934-E3/73](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [BAW76-TR](#) [MM230L-CAA](#) [MMSD914-TP](#) [IDW40E65D1](#)