


RFMD + TriQuint = Qorvo

Applications

Base Station





Product Features

- Usable bandwidth 18 MHz
- High attenuation
- Low Loss
- Single-ended operation
- No matching required for operation at 50Ω
- Small Size: 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- Hermetically Sealed
- RoHS compliant, Pb-free


General Description

856884 is a general purpose Uplink filter for Band 12. This filter was specifically designed in a 3X3mm hermetic package for base station applications and is part of our wide portfolio of RF filters in the same package.

Low insertion loss, coupled with high attenuation makes this filter a natural choice for our customers Uplink RF filtering needs.

Functional Block Diagram

Top Vlew



Pin Configuration

Pin No.	Label
2	Input
5	Output
1,3,4,6	Ground

Ordering Information

Part No.	Description
856884	Packaged Part
856884-EVB	Evaluation board
Standard T/D aiza	E 000 unite/real

Standard T/R size = 5,000 units/reel

TriQuint 🕥 QOCVO

RFMD + TriQuint = Qorvo

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	–40 to +105 ℃
Operable Temperature	–20 to +105 ℃
DC Voltage on any port (instantaneous)	+5 Vdc
RF Input Power ⁽¹⁾	+22dBm

1. Input power with applied CW signal at = $105 \,^{\circ}$ C in the 703 – 748MHz frequency band for 24 hrs.

Operation of this device outside the parameter ranges given above may cause permanent damage.

Electrical Specifications (1)

Specified Temperature	e Range: ⁽²⁾ –40 to +85 °C


Parameter (3)	Conditions	Min	Typical ⁽⁴⁾	Max	Units	
Center Frequency		-	707	-	MHz	
	698 – 716 MHz	-	1.5	2	dB	
Maximum Insertion Loss	698 – 716 MHz at +105°C ⁽⁵⁾	-	1.5	2.1	dB	
Amplitude Variation	698 – 716 MHz	-	0.5	1	dB p-p	
Amplitude Variation (over any 5MHz band) ⁽⁶⁾	698 – 716 MHz	-	0.4	0.8	dB p-p	
Phase Ripple	698 – 716 MHz	-	6	30	deg	
Crown Dalay Variation	698 – 716 MHz	-	11	21	21	
Group Delay Variation	698 – 716 MHz at +105°C ⁽⁵⁾	-	11	23	ns p-p	
Absolute Group Delay	698 – 716 MHz	-	34	40	ns	
	70 – 120 MHz 70 – 120 MHz at +105°C ⁽⁵⁾	50 49	52 52	-		
	430–470 MHz	41	44	-		
Absolute Attenuation ⁽⁷⁾	728 – 746 MHz	9	21	-		
	753 – 763 MHz	35	39	-		
	804 – 815 MHz	39	42	-	dB	
	930 – 940 MHz	41	45	-		
	930 – 940 MHz at +105°C ⁽⁵⁾	40	45	-		
	1609 – 1629 MHz	47	53	-		
	1860 – 1880 MHz	44	53	-		
	1860 – 1880 MHzat +105°C ⁽⁵⁾	37	53	-		
	2770 – 3043 MHz	15	19	-		
	2770 – 3043 MHz at +105°C ⁽⁵⁾	13	19	-		
	698 – 716 MHz	-	1.7:1	2:1	-	
Input/output VSWR	698 – 716 MHz at +105°C ⁽⁵⁾	-	1.7:1	2.3:1	-	
Source/Load Impedance (7)	Single-ended	-	50	-	Ω	
Load Impedance (7)	Single-ended	-	50	-	Ω	

Notes:

- 1. All specifications are based on the TriQuint schematic for the main reference design shown on page 3
- 2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature.
- 3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances.
- 4. Typical values are based on average measurements at room temperature.
- 5. Extended Temperature operation: the filter can be operated up to +105 ℃ with de-rated specification as noted
- 6. Describes the total variation over the defined frequency range
- 7. Relative to zero dB.
- 8. This is the optimum impedance in order to achieve the performance shown.



856884 Evaluation Board

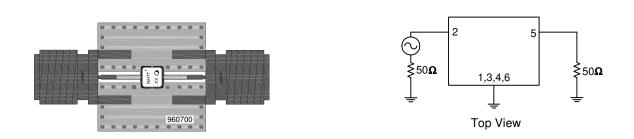


Notes:

1. Top, middle & bottom layers: 1 oz copper, Substrates: FR4 dielectric, .031" thick, Finish plating: Nickel: 3-8 μm thick, Gold: .03-.2 μm thick, Hole plating: Copper min .0008 μm thick

Bill of Material – 856884-EVB				
Reference Des.	Value	Description	Manuf.	Part Number
SMA	N/A	SMA Connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960700

PCB Mounting Pattern



Notes:

1. All dimensions are in millimeters.


2. This footprint represents a recommendation only



856884 707 MHz SAW Filter


Measured Performance Plots

Test conditions unless otherwise noted: Temp= +25 °C

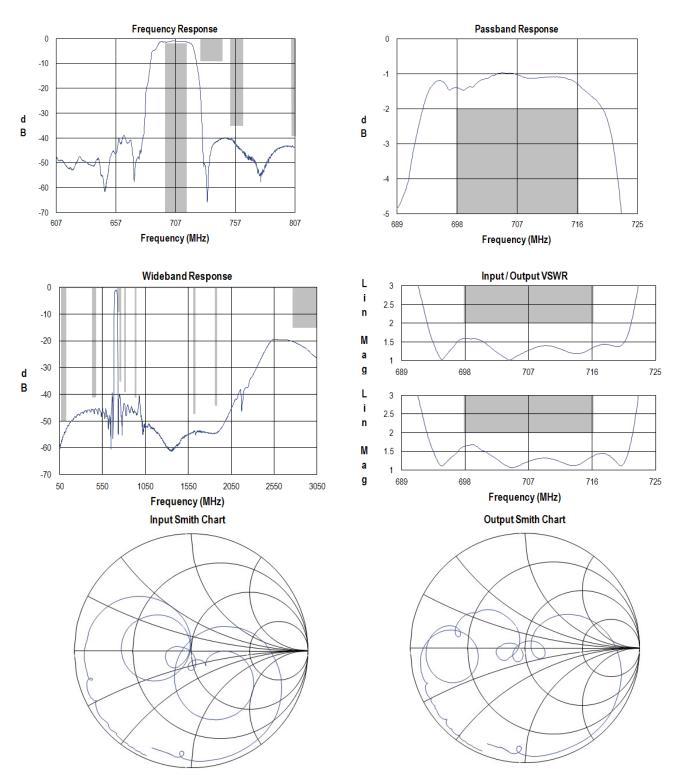



Package Information, Marking and Dimensions



Package Style: SMP-12A Dimensions: 3.00 x 3.00 x 1.22 mm


Body: Al_2O_3 ceramic Lid: *Kovar*, *Ni* plated Terminations: *Au* plating 0.5 - 1.0µm, over a 2-6µm *Ni* plating

All dimensions shown are nominal in millimeters All tolerances are ± 0.15 mm except overall length and width ± 0.10 mm

The date code consists of: day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

Tape and Reel information

Standard T/R size = 5000 units/reel. All dimensions are in millimeters

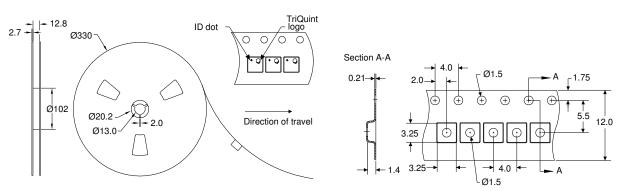

TriQuint 🕥 QOCVO

RFMD + TriQuint = Qorvo

856884 707 MHz SAW Filter

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: 1BValue:Passes ≥ 500 V min.Test:Human Body Model (HBM)Standard:JEDEC Standard JESD22-A114

ESD Rating: B

Value:	Passes ≥ 300 V min.
Test:	Machine Body Model (MBM)
Standard:	JEDEC Standard JESD22-A114

MSL Rating

Not applicable. Hermetic package.

Solderability

Compatible with both lead-free (260 ℃ maximum reflow temperature) and tin/lead (245 ℃ maximum reflow temperature) soldering processes.

Refer to **Soldering Profile** for recommended guidelines.

RoHs Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($C_{15}H_{12}Br_4O_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: <u>www.triquint.com</u>

Tel: 877-800-8584

Email: <u>customer.support@qorvo.com</u>

For information about the merger of RFMD and TriQuint as Qorvo:

Web: <u>www.qorvo.com</u>

For technical questions and application information:

Email: flapplication.engineering@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or lifesustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by TriQuint Semiconductor manufacturer:

Other Similar products are found below :

MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF DC4859J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN DSS-313-PIN B39321R801H210 B39321R821H210 B39921B4317P810 1A0220-3 2089-6207-00 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 1P510S CER0813B 3A325 40287 41180 ATB3225-75032NCT B69842N5807A150 BD0810N50100AHF BD2326L50200AHF BD2425J50200AHF HMC189AMS8TR C5060J5003AHF JHS-114-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2081E SF2194E SF2238E CDBLB455KCAX39-B0 RF1353C PD0922J5050D2HF