


FRC2 RELAY



FEATURES

- High contact rating (50A)
- High temperature design
- Ideal for using in control-car starter and light
- Plug in terminal

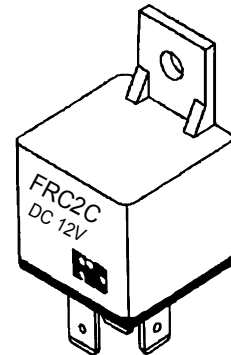

SPECIFICATIONS

COIL RATING

RATED VOLTAGE (V DC)	COIL RESISTANCE Ω +/- 10 %	RATED CURRENT (mA)	MUST OPERATE VOLTAGE	MUST DROPOUT VOLTAGE	MAXIMUM VOLTAGE	POWER CONSUMPTION
			% OF RATED VOLTAGE (At +20 °C)			
6	20	300	65 Max.	10 Min.	130 Max.	1.8W (Approx.)
12	80	150				
24	320	75				
48	1280	37.5				

* IF USE RESISTOR :
6VDC WITH 180 Ω RESISTOR
12VDC WITH 680 Ω RESISTOR
24VDC WITH 2702 Ω RESISTOR

CHARACTERISTICS

Contact Arrangement	1 Form A; 1 Form C; 1 Form U (= 2 x 1 Form A)
Contact Material	Silvery Alloy
Contact Resistance	30m Ω Max.
Contact Rating (Resistive Load)	1A : 50A 14V DC 1C : (NO) 50A 14V DC (NC) 40A 14V DC 1U (2 x 1 Form A) : 2 x 25A 14VDC
Switching Voltage	DC 75V
Operate Time (Initial)	7ms Max. Typical
Release Time (Initial)	5 ms Max. Typical
Insulation Resistance	100M Ω Min. (500V DC)
Dielectric Strength	500Vrms between coil and contact
Shock Resistance	20g Approx.
Vibration Resistance	1.5mm Double amplitude 10-40Hz
Ambient Temperature	Operating : -40°C to +85°C Storage : -40°C to + 125°C
Humidity	40 - 85% RH
Operation Life	Mechanical : 10 ⁷ Electrical : 10 ⁵ (At rated load)
Weight	35g Approx.

[Specifications are subject to change without notices.]

FORWARD INDUSTRIAL COMPANY. (O/B COMMERCIAL UNION LTD)

RM. 1405, Wu Sang House, 655 Nathan Road, Mongkok, Kowloon, Hong Kong.


TEL : (852) 27892365 FAX : (852) 27893102 E-MAIL : sales@ficrelay.com.hk WEBSITE : http://www.ficrelay.com.hk

FRC2 RELAY



ORDERING INFORMATION

FRC2 A - 1 N - DC12V

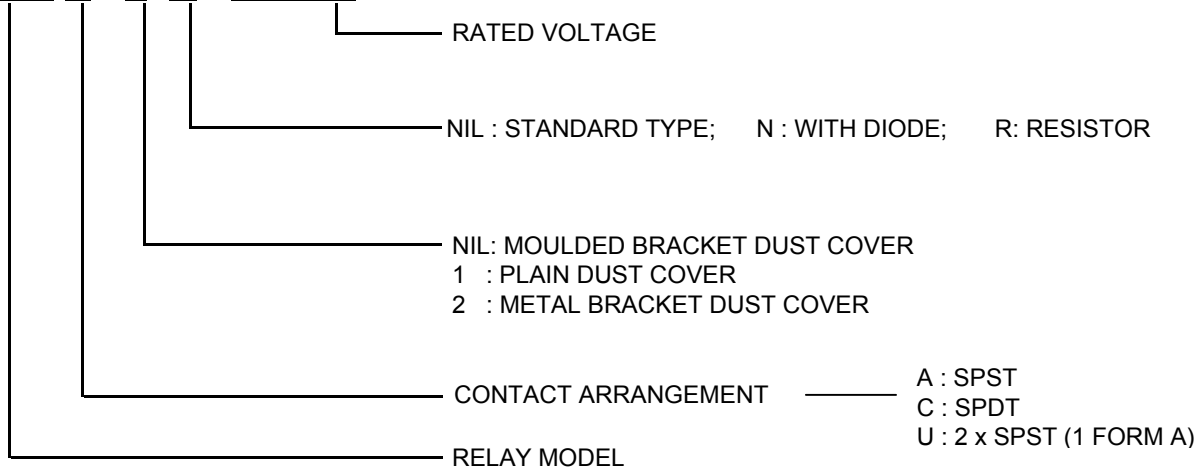

Note : Pb-Free and RoHS compliant relays are available.



For ordering, please add suffix "Pb-Free" or "RoHS" to standard relay part numbers.

For example : FRC2A-1 DC 12V "Pb-Free" for Pb-Free Relay


For example : FRC2A-1 DC 12V "RoHS" for RoHS Compliant Relay

DIMENSIONS (UNIT : mm)


PLAIN DUST COVER
(PLUG IN TYPE TERMINAL)

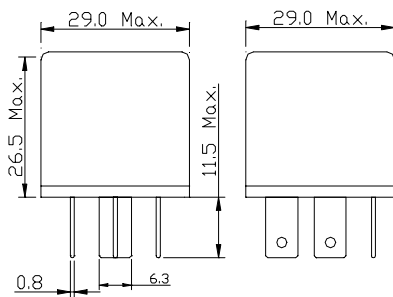


MOULDED BRACKET DUST COVER

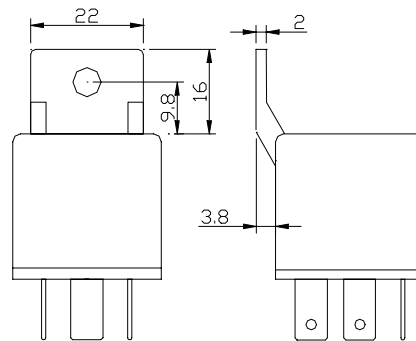


TERMINAL ARRANGEMENT (BOTTOM VIEW)



Diode or Resistor If Used
1 FORM C



Diode or Resistor If Used
1 FORM A



Diode or Resistor If Used
1 FORM U

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Relays](#) category:

Click to view products by [Forward](#) manufacturer:

Other Similar products are found below :

[896H-1AH-D1SW-001-24VDC](#) [896H-1AH-D1SW-R1-12VDC](#) [896H-1CH-C1-001-12VDC](#) [896H-1CH-S-24VDC](#) [896HP-1AH-C-12VDC](#)
[G5CE1ASIDC12](#) [AEV31024](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [1617057-2](#) [2-1617057-2](#) [CB1F-M-12V-H15](#) [CB1-T-R-M-](#)
[12V](#) [896H-1CH-D1SF-R1-12VDC](#) [896H-1CH-D1SF-R1-T-12VDC](#) [898H-1AH-D-001-12VDC](#) [24198-1](#) [5-1616920-2](#) [5-1617052-9](#) [5407-](#)
[0011-HS](#) [CB1AF-M-12V-H59](#) [5-1617346-8](#) [103-1AH-C-12VDC](#) [CF2Q-12V](#) [V23134A1052X299](#) [CP112J](#) [896H-1AH-S1-001-12VDC](#)
[897H-1AH-D-R1-U01-12VDC](#) [896H-1CH-D-U39-24VDC](#) [896HP-1AH-C-U2120VDC](#) [896E-1CH-D1SW-U57-12VDC](#) [896H-1CH-D1SW-](#)
[R1-U30-12VDC](#) [896H-1AH-C1S-R1-24VDC](#) [102-1CH-C-12VDC](#) [V23076A3001D142T](#) [1-19042-6](#) [3-1393305-1](#) [J7TKNA9](#)
[V23234A1001X043-EV-144](#) [V23086-R1851-A502](#) [898H-1AH-D1SW-R1-12VDC](#) [RH4C1P2607](#) [RE031005](#) [V23134M0052G242](#) [1393204-1](#)
[G8N-1L-AS DC12](#) [V23076A3022D142](#) [V23074A2001A402](#)