




LLM2520

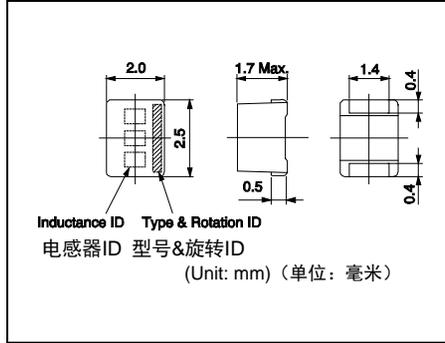

(Previous name FSLM2520) (原名 FSLM2520)
Inductance Range/电感值范围: 0.1~220μH (E-12)

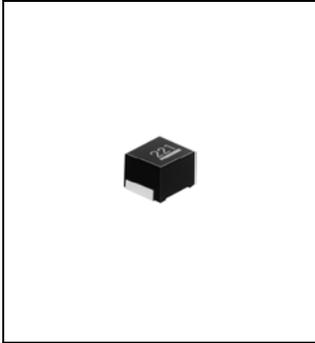

Recommended patterns
推荐焊盘尺寸

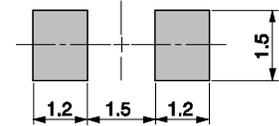

(Unit: mm)


FEATURES 特点

- Wire-wound miniature chip inductor most suitable for surface mount.
- It is recommended for wide general use for signal conditioning in a variety of electronic equipment.
- Low profile 1.7mm Max height. (1.6mm Typ.)
- Wide inductance range from 0.1 to 220μH.
- Superior solderability and high heat-resistance for reflow soldering.
- Excellent environmental and mechanical stability.
- 卷线微型贴片电感器最适合表面贴装。
- 推荐在多样化的电子设备中各种信号条件下普遍使用。
- 薄型: 最高1.7毫米 (1.6毫米、典型.)
- 0.1~220μH的宽泛的电感值范围。
- 对于回流焊接, 具有优良的可焊性和高的热电阻。
- 出色的环境和机械特性。

ELECTRICAL CHARACTERISTICS 电气特性

| | | | |
|--------------------------------------|-------------------------|-----------|--------------------|
| • Inductance Range | 0.1~220μH (E-12 Series) | • 电感值范围 | 0.1~220μH (E-12系列) |
| • Inductance Tolerance | J ; ± 5% | • 电感值公差 | J ; ± 5% |
| | K ; ± 10% | | K ; ± 10% |
| • Inductance Temperature Coefficient | 750ppm/°C Max. | • 电感值温度系数 | 750ppm/°C Max. |
| • Operating Temperature | -40°C~+85°C | • 使用温度范围 | -40°C~+85°C |
| • Storage Temperature | -40°C~+85°C | • 储存温度范围 | -40°C~+85°C |
| (In case of taping used) | (-40°C~+60°C) | (使用编带包装时) | (-40°C~+60°C) |

EXAMPLES OF CHARACTERISTICS 特性范例

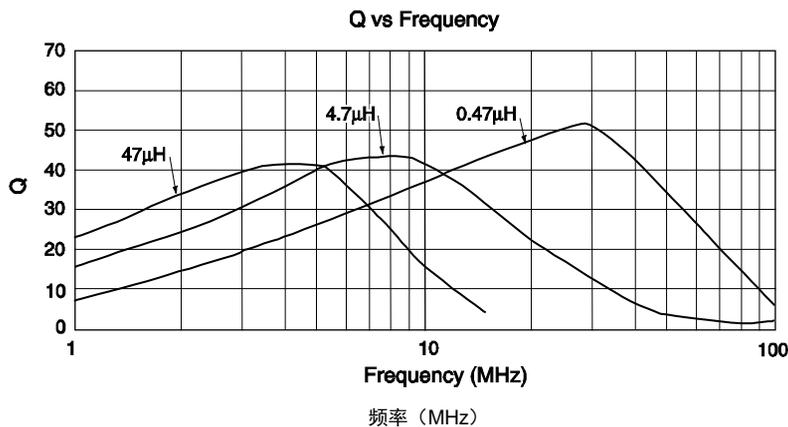

continued from previous page 接上页

STANDARD PART NUMBERS 标准零件号码

TYPE LLM2520 (Previous name FSLM2520, Quantity/reel; 2,000 PCS)/LLM2520型 (原名FSLM2520, 每卷数量; 2,000 PCS)

| 零件号码 | 电感值 ⁽¹⁾ | | 最小Q | 测试频率 | 最大直流电阻 ⁽²⁾ | 最大额定直流电流 ⁽³⁾ | 最小自谐振频率 |
|-------------------|---------------------------|-----------|--------|----------------------|---------------------------------------|---|------------------------------------|
| Part Number | Inductance ⁽¹⁾ | | Q Min. | Test Frequency (MHz) | DC Resistance ⁽²⁾ (Ω) Max. | Rated DC Current ⁽³⁾ (mA) Max. | Self-resonant Frequency (MHz) Min. |
| | Lo (μH) | Tolerance | | | | | |
| #FSLM2520-R10□=P2 | 0.10 | J,K | 30 | 25.2 | 0.21 | 570 | 680 |
| #FSLM2520-R12□=P2 | 0.12 | J,K | 30 | 25.2 | 0.22 | 550 | 650 |
| #FSLM2520-R15□=P2 | 0.15 | J,K | 30 | 25.2 | 0.25 | 500 | 530 |
| #FSLM2520-R18□=P2 | 0.18 | J,K | 30 | 25.2 | 0.29 | 460 | 520 |
| #FSLM2520-R22□=P2 | 0.22 | J,K | 30 | 25.2 | 0.30 | 430 | 390 |
| #FSLM2520-R27□=P2 | 0.27 | J,K | 30 | 25.2 | 0.33 | 420 | 330 |
| #FSLM2520-R33□=P2 | 0.33 | J,K | 30 | 25.2 | 0.39 | 400 | 310 |
| #FSLM2520-R39□=P2 | 0.39 | J,K | 30 | 25.2 | 0.40 | 375 | 290 |
| #FSLM2520-R47□=P2 | 0.47 | J,K | 30 | 25.2 | 0.44 | 350 | 260 |
| #FSLM2520-R56□=P2 | 0.56 | J,K | 30 | 25.2 | 0.49 | 330 | 230 |
| #FSLM2520-R68□=P2 | 0.68 | J,K | 30 | 25.2 | 0.52 | 320 | 200 |
| #FSLM2520-R82□=P2 | 0.82 | J,K | 30 | 25.2 | 0.61 | 290 | 180 |
| #FSLM2520-1R0□=P2 | 1.0 | J,K | 30 | 7.96 | 0.75 | 250 | 150 |
| #FSLM2520-1R2□=P2 | 1.2 | J,K | 30 | 7.96 | 0.87 | 240 | 140 |
| #FSLM2520-1R5□=P2 | 1.5 | J,K | 30 | 7.96 | 1.0 | 230 | 130 |
| #FSLM2520-1R8□=P2 | 1.8 | J,K | 30 | 7.96 | 1.1 | 220 | 120 |
| #FSLM2520-2R2□=P2 | 2.2 | J,K | 30 | 7.96 | 1.3 | 210 | 105 |
| #FSLM2520-2R7□=P2 | 2.7 | J,K | 30 | 7.96 | 1.4 | 200 | 90 |
| #FSLM2520-3R3□=P2 | 3.3 | J,K | 30 | 7.96 | 1.6 | 190 | 80 |
| #FSLM2520-3R9□=P2 | 3.9 | J,K | 30 | 7.96 | 1.7 | 185 | 75 |
| #FSLM2520-4R7□=P2 | 4.7 | J,K | 30 | 7.96 | 1.9 | 180 | 70 |
| #FSLM2520-5R6□=P2 | 5.6 | J,K | 30 | 7.96 | 2.2 | 170 | 60 |
| #FSLM2520-6R8□=P2 | 6.8 | J,K | 30 | 7.96 | 2.4 | 165 | 55 |
| #FSLM2520-8R2□=P2 | 8.2 | J,K | 30 | 7.96 | 2.6 | 160 | 50 |
| #FSLM2520-100□=P2 | 10.0 | J,K | 25 | 2.52 | 2.2 | 155 | 30 |
| #FSLM2520-120□=P2 | 12.0 | J,K | 25 | 2.52 | 2.5 | 150 | 27 |
| #FSLM2520-150□=P2 | 15.0 | J,K | 25 | 2.52 | 2.8 | 140 | 23 |
| #FSLM2520-180□=P2 | 18.0 | J,K | 25 | 2.52 | 3.2 | 130 | 22 |
| #FSLM2520-220□=P2 | 22.0 | J,K | 25 | 2.52 | 3.6 | 125 | 21 |
| #FSLM2520-270□=P2 | 27.0 | J,K | 25 | 2.52 | 4.3 | 115 | 19 |
| #FSLM2520-330□=P2 | 33.0 | J,K | 25 | 2.52 | 4.7 | 110 | 17 |
| #FSLM2520-390□=P2 | 39.0 | J,K | 25 | 2.52 | 8.1 | 85 | 15 |
| #FSLM2520-470□=P2 | 47.0 | J,K | 25 | 2.52 | 8.8 | 80 | 14 |
| #FSLM2520-560□=P2 | 56.0 | J,K | 25 | 2.52 | 10.0 | 75 | 12.5 |
| #FSLM2520-680□=P2 | 68.0 | J,K | 25 | 2.52 | 11.5 | 70 | 12 |
| #FSLM2520-820□=P2 | 82.0 | J,K | 25 | 2.52 | 12.5 | 65 | 11 |
| #FSLM2520-101□=P2 | 100.0 | J,K | 15 | 0.796 | 13.0 | 60 | 10 |
| #FSLM2520-121□=P2 | 120.0 | J,K | 15 | 0.796 | 19.0 | 55 | 8 |
| #FSLM2520-151□=P2 | 150.0 | J,K | 15 | 0.796 | 22.0 | 50 | 7.5 |
| #FSLM2520-181□=P2 | 180.0 | J,K | 15 | 0.796 | 25.0 | 47 | 7 |
| #FSLM2520-221□=P2 | 220.0 | J,K | 15 | 0.796 | 28.0 | 44 | 6.5 |

Add the tolerance of inductance to within the □ of the part Number as follows: J=±5%, K=±10%

□ 添加电感值公差至品号如J=±5%, K=±10%

※Note 注意事项

Operating frequency bands on a set of each article number is equal to or less than measurement frequency.

- (1) Inductance is measured with a LCR meter 4194A (*) or 4291A (*)
- (2) DC resistance is measured with a Digital Multimeter TR6871 (Advantest) or equivalent.
- (3) Rated DC current is that which causes a 10% inductance reduction from the initial value, or coil temperature to rise by 20°C, whichever is smaller. (Reference ambient temperature 20°C)

- (1) 使用LCR仪表4194A (*)或者4291A (*)测试电感值。
- (2) 使用数字万用表TR6871 (Advantest)或者功能相同的工具测试直流电阻。
- (3) 额定电流是以下两者中比较小的一个: 电感值从最初值减少10%或者线圈温度升高20°C。(参考周围环境温度20°C)

* Agilent技术

* Agilent Technologies

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [murata](#) manufacturer:

Other Similar products are found below :

[786028C](#) [MGJ1D121905MPC-R7](#) [MGJ2D051515SC](#) [82103C](#) [82224C](#) [82473C](#) [GCM32EC71H106MA03L](#) [GRM2165C1H101FA01D](#)
[PTGL09AS2R2K3B51B0](#) [11R683C](#) [DD1274AS-H-220M=P3](#) [DFE252012P-1R0M=P2](#) [BL02RN1R2P1A](#) [BPM15-120-Q12P-C](#) [NMK1212SC](#)
[NMV1212DAC](#) [LQH43MN330J03L](#) [GJM0335C1E220GB01D](#) [GRM1885C1H150FA01J](#) [RF1211C](#) [MGJ2D121509SC](#) [MGJ6D122005LMC-](#)
[R7](#) [#B953AS-330M=P3](#) [BLM18AG601SN1J](#) [HN-214](#) [HN-214X](#) [TZ03P450](#) [UEE-12/12.5-D48NB-C](#) [LBWB1ZZYDZ-DTEMP-SNIC-](#)
[UART-A](#) [LLM315R70J225MA11L](#) [46334C](#) [DR4103](#) [SCA830-D07-PCB](#) [NKE1212DC](#) [NMA1215SC](#) [UVQ-48/2.5-D24PB-C](#) [IML-0642](#)
[HPR105C](#) [HPQ-12/25-D48PB-C](#) [UWS-5/10-Q48N-C](#) [UWR-5/2000-D24E-C](#) [19R683C](#) [UHE-152000-D24-C](#) [782485/35C](#) [UEI-3.3/15-](#)
[Q12PR-C](#) [MEV1S0505SC](#) [MEMS-EVAL-BOARD](#) [MEJ2D0512SC](#) [MEE3S1215SC](#) [MEE1S1509SC](#)