






Pin header

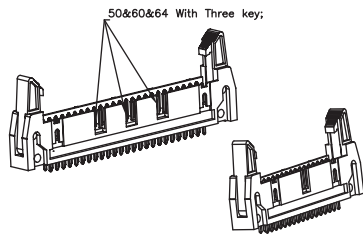

Technical data:

Insulating material:	High temp. Plastic (Nylon 46, UL 94V-0)
Colour:	Black
Contact material:	Copper Alloy
Plating:	Gold
Rated current:	3 Amp.
Rated voltage:	250 V _{AC} /V _{DC}
Withstand voltage:	600 V _{AC} for one minute
Contact resistance:	20 mOhm max.
Insulation resistance:	1000 MOhm min.
Operating temperature:	-40°C to +105°C
Max. soldering temp.:	260°C for 10 seconds


pitch	rows	row distance	orientation	termination
2,54	2	2,54	straight	through hole

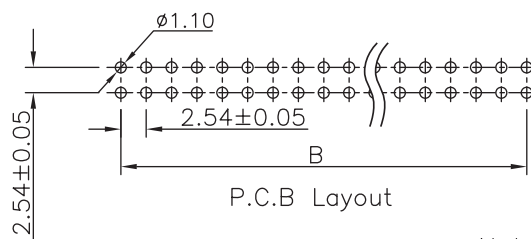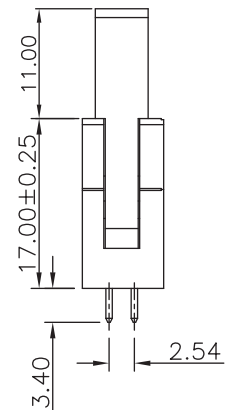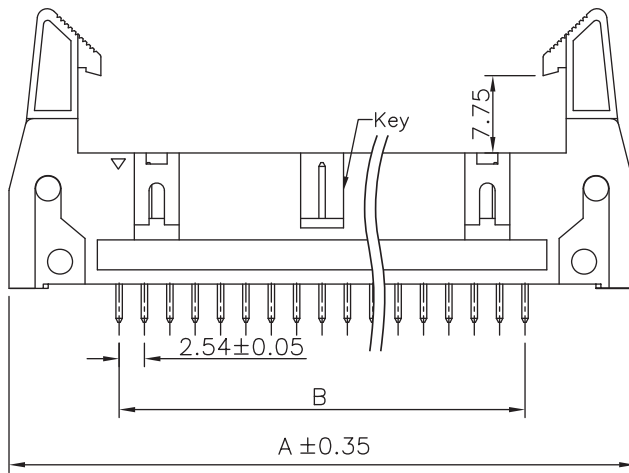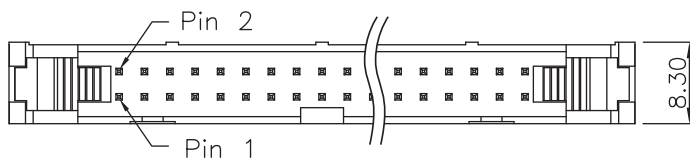

Notes:

No. Of Positions 50–64 With three key;
All Other Pin With one key.

Pincount	A	B	Pincount	A	B
6	27.12	5.08	26	52.52	30.48
8	29.66	7.62	30	57.60	35.56
10	32.20	10.16	34	62.68	40.64
12	34.74	12.70	40	70.30	48.26
14	37.28	15.24	50	83.00	60.96
16	39.82	17.78	60	95.70	73.66
20	44.90	22.86	64	100.78	78.74
24	49.98	27.94			

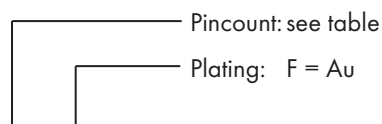

Order code:

092-2-XXX-0-F-KS0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MPE Garry](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)