

ZLJ SERIES

105°C Long Life, Low Impedance, High Ripple Current

◆ FEATURES

- Load Life : 105°C 6000~10000 hours.
- RoHS compliance.




◆ SPECIFICATIONS

Items	Characteristics																																																																							
Category Temperature Range	−40~+105°C																																																																							
Rated Voltage Range	6.3~100Vdc																																																																							
Capacitance Tolerance	±20% (20°C, 120Hz)																																																																							
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)																																																																							
(tanδ) Dissipation Factor(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>tanδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.08</td> </tr> </table> (20°C, 120Hz) When capacitance is over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF.										Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	80	100	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.08																																										
Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	80	100																																																															
tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.08																																																															
Endurance	After applying rated voltage with rated ripple current for specified time at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td colspan="9">Within ±25% of the initial value. (6.3Vdc, 10Vdc: ±30%)</td> </tr> <tr> <td>Dissipation Factor</td> <td colspan="9">Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td colspan="9">Not more than the specified value.</td> </tr> </table> <table border="1"> <tr> <td>Case Size</td> <td colspan="3">Life Time(hrs)</td> </tr> <tr> <td>6.3Vdc</td> <td>10~50Vdc</td> <td>63~100Vdc</td> <td></td> </tr> <tr> <td>ΦD≤6.3</td> <td>6000</td> <td>7000</td> <td>6000</td> </tr> <tr> <td>8×11.5</td> <td>8000</td> <td>9000</td> <td>8000</td> </tr> <tr> <td>10×12.5</td> <td>9000</td> <td>9000</td> <td>9000</td> </tr> <tr> <td>8×16.8×20</td> <td>9000</td> <td>10000</td> <td>9000</td> </tr> <tr> <td>10×16.8×20, 10×25</td> <td colspan="3">10000</td> </tr> <tr> <td>ΦD≥12.5</td> <td colspan="3"></td> </tr> </table>										Capacitance Change	Within ±25% of the initial value. (6.3Vdc, 10Vdc: ±30%)									Dissipation Factor	Not more than 200% of the specified value.									Leakage Current	Not more than the specified value.									Case Size	Life Time(hrs)			6.3Vdc	10~50Vdc	63~100Vdc		ΦD≤6.3	6000	7000	6000	8×11.5	8000	9000	8000	10×12.5	9000	9000	9000	8×16.8×20	9000	10000	9000	10×16.8×20, 10×25	10000			ΦD≥12.5			
Capacitance Change	Within ±25% of the initial value. (6.3Vdc, 10Vdc: ±30%)																																																																							
Dissipation Factor	Not more than 200% of the specified value.																																																																							
Leakage Current	Not more than the specified value.																																																																							
Case Size	Life Time(hrs)																																																																							
6.3Vdc	10~50Vdc	63~100Vdc																																																																						
ΦD≤6.3	6000	7000	6000																																																																					
8×11.5	8000	9000	8000																																																																					
10×12.5	9000	9000	9000																																																																					
8×16.8×20	9000	10000	9000																																																																					
10×16.8×20, 10×25	10000																																																																							
ΦD≥12.5																																																																								
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> (120Hz)										Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	80	100	Z(-25°C)/Z(20°C)	2	2	2	2	2	2	2	2	2	Z(-40°C)/Z(20°C)	3	3	3	3	3	3	3	3	3																																
Rated Voltage (Vdc)	6.3	10	16	25	35	50	63	80	100																																																															
Z(-25°C)/Z(20°C)	2	2	2	2	2	2	2	2	2																																																															
Z(-40°C)/Z(20°C)	3	3	3	3	3	3	3	3	3																																																															

◆ MULTIPLIER FOR RIPPLE CURRENT

	Frequency(Hz)	120	1k	10k	100k≤
Coefficient	8.2~33μF	0.42	0.70	0.90	1.00
	47~270μF	0.50	0.73	0.92	1.00
	330~680μF	0.55	0.77	0.94	1.00
	820~1800μF	0.60	0.80	0.96	1.00
	2200~8200μF	0.70	0.85	0.98	1.00

◆ DIMENSIONS (mm)

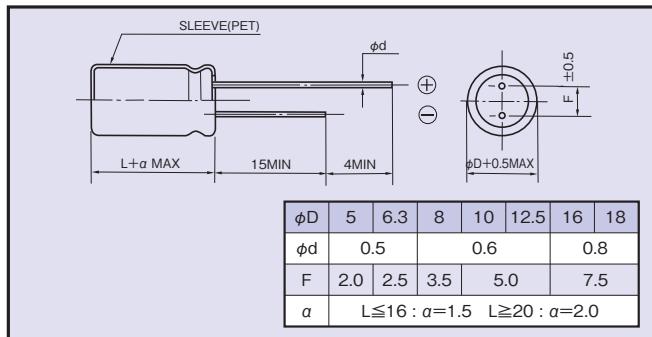

◆ OPTION

PET Sleeve	Code
	Blank

◆ PART NUMBER

□□□ Rating Voltage ZLJ Series □□□□□ Capacitance M Capacitance Tolerance □□□ Option □□ Lead Forming DXL Case Size



MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ZLJ

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi\text{D} \times \text{L}(\text{mm})$	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)		Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi\text{D} \times \text{L}(\text{mm})$	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)	
				20°C, 100kHz	-10°C, 100kHz					20°C, 100kHz	-10°C, 100kHz
6.3	220	5×11	345	0.40	1.2	25	68	5×11	450	0.40	1.2
	470	6.3×11	540	0.17	0.51		150	6.3×11	700	0.17	0.51
	820	8×11.5	945	0.075	0.23		330	8×11.5	1200	0.075	0.23
	1000	8×16	1250	0.059	0.18		390	8×16	1600	0.059	0.18
	1200	10×12.5	1330	0.053	0.16		470	10×12.5	1700	0.053	0.16
	1500	8×20	1500	0.041	0.13		560	8×20	1960	0.041	0.13
	1800	10×16	1760	0.038	0.12		680	10×16	2000	0.038	0.12
	2700	10×20	1960	0.028	0.084		1000	10×20	2500	0.028	0.084
	3300	10×25	2250	0.024	0.072		1200	10×25	2900	0.024	0.072
	3900	12.5×20	2480	0.025	0.075		1500	12.5×20	2600	0.025	0.075
	4700	12.5×25	2900	0.019	0.057		1800	12.5×25	3200	0.019	0.057
	5600	12.5×30	3450	0.018	0.054		2200	12.5×30	3660	0.018	0.054
	6800	16×20	3250	0.021	0.063		2200	16×20	3330	0.021	0.063
	6800	12.5×35	3570	0.016	0.048		2700	12.5×35	4120	0.016	0.048
	8200	16×25	3630	0.017	0.051		3300	16×25	3810	0.017	0.051
10	150	5×11	450	0.40	1.2	35	47	5×11	450	0.40	1.2
	330	6.3×11	700	0.17	0.51		100	6.3×11	700	0.17	0.51
	560	8×11.5	1200	0.075	0.23		180	8×11.5	1200	0.075	0.23
	680	8×16	1600	0.059	0.18		220	8×16	1600	0.059	0.18
	820	10×12.5	1700	0.053	0.16		270	10×12.5	1700	0.053	0.16
	1000	8×20	1960	0.041	0.13		330	8×20	1960	0.041	0.13
	1200	10×16	2000	0.038	0.12		390	10×16	2000	0.038	0.12
	1800	10×20	2500	0.028	0.084		560	10×20	2500	0.028	0.084
	2200	10×25	2900	0.024	0.072		680	10×25	2900	0.024	0.072
	2700	12.5×20	2600	0.025	0.075		820	12.5×20	2600	0.025	0.075
	3300	12.5×25	3200	0.019	0.057		1200	12.5×25	3200	0.019	0.057
	4700	12.5×30	3660	0.018	0.054		1500	12.5×30	3660	0.018	0.054
	4700	16×20	3330	0.021	0.063		1500	16×20	3330	0.021	0.063
	5600	12.5×35	4120	0.016	0.048		1800	12.5×35	4120	0.016	0.048
	5600	16×25	3810	0.017	0.051		1800	16×25	3810	0.017	0.051
16	120	5×11	450	0.40	1.2	50	27	5×11	310	0.48	1.5
	270	6.3×11	700	0.17	0.51		56	6.3×11	500	0.22	0.66
	470	8×11.5	1200	0.075	0.23		100	8×11.5	950	0.12	0.36
	560	8×16	1600	0.059	0.18		120	8×16	1230	0.082	0.25
	680	10×12.5	1700	0.053	0.16		150	10×12.5	1280	0.073	0.22
	820	8×20	1960	0.041	0.13		180	8×20	1580	0.058	0.18
	1000	10×16	2000	0.038	0.12		220	10×16	1650	0.053	0.16
	1500	10×20	2500	0.028	0.084		330	10×20	2060	0.038	0.12
	1800	10×25	2900	0.024	0.072		390	10×25	2420	0.032	0.10
	2200	12.5×20	2600	0.025	0.075		470	12.5×20	2300	0.032	0.10
	2700	12.5×25	3200	0.019	0.057		680	12.5×25	2800	0.025	0.080
	3300	12.5×30	3660	0.018	0.054		820	12.5×30	3370	0.023	0.074
	3300	16×20	3330	0.021	0.063		820	16×20	3070	0.026	0.084
	3900	12.5×35	4120	0.016	0.048		1000	12.5×35	3810	0.021	0.067
	4700	16×25	3810	0.017	0.051		1000	16×25	3510	0.022	0.070

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi\text{D} \times \text{L}(\text{mm})$	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)		Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi\text{D} \times \text{L}(\text{mm})$	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)	
				20°C, 100kHz	-10°C, 100kHz					20°C, 100kHz	-10°C, 100kHz
63	18	5×11	240	0.71	3.2	100	8.2	5×11	220	1.2	5.4
	47	6.3×11	420	0.28	1.3		18	6.3×11	370	0.46	2.1
	82	8×11.5	720	0.18	0.79		33	8×11.5	620	0.29	1.3
	100	8×16	990	0.13	0.58		47	8×16	780	0.20	0.90
	120	10×12.5	990	0.11	0.44		56	10×12.5	780	0.17	0.66
	150	8×20	1200	0.096	0.43		68	8×20	1040	0.16	0.66
	180	10×16	1200	0.076	0.31		82	10×16	1040	0.11	0.47
	270	10×20	1570	0.056	0.23		100	10×20	1430	0.084	0.34
	270	12.5×16	1570	0.072	0.27		100	12.5×16	1430	0.11	0.34
	330	10×25	1990	0.046	0.19		120	10×25	1620	0.069	0.28
	390	12.5×20	1990	0.041	0.13		150	12.5×20	1750	0.062	0.18
	470	12.5×25	2460	0.031	0.093		220	12.5×25	2210	0.047	0.14
	560	12.5×30	2760	0.028	0.084		270	12.5×30	2400	0.042	0.13
	560	16×20	2380	0.032	0.096		270	16×20	1950	0.048	0.15
	680	12.5×35	3040	0.024	0.072		330	12.5×35	2600	0.036	0.11
	820	16×25	2890	0.025	0.075		390	12.5×40	2860	0.032	0.095
80	12	5×11	220	1.2	5.4		390	16×25	2430	0.038	0.12
	27	6.3×11	370	0.46	2.1		390	18×20	2270	0.045	0.14
	47	8×11.5	620	0.29	1.3		470	16×31.5	2640	0.032	0.095
	56	8×16	780	0.20	0.90		470	18×25	2500	0.036	0.11
	68	10×12.5	780	0.17	0.66		560	16×35.5	2860	0.029	0.086
	82	8×20	1040	0.16	0.66		560	18×31.5	2860	0.030	0.090
	100	10×16	1040	0.11	0.47		680	16×40	3510	0.027	0.081
	150	10×20	1430	0.084	0.34		680	18×35.5	3510	0.027	0.081
	150	12.5×16	1430	0.11	0.34		820	18×40	3860	0.026	0.076
	180	10×25	1620	0.069	0.28						
	220	12.5×20	1750	0.062	0.18						
	270	12.5×25	2210	0.047	0.14						
	330	12.5×30	2400	0.042	0.13						
	330	16×20	1950	0.048	0.15						
	390	12.5×35	2600	0.036	0.11						
	470	12.5×40	2860	0.032	0.095						
	470	16×25	2430	0.038	0.12						
	470	18×20	2270	0.045	0.14						
	560	16×31.5	2640	0.032	0.095						
	680	16×35.5	2860	0.029	0.086						
	680	18×25	2500	0.036	0.11						
	820	16×40	3510	0.027	0.081						
	820	18×31.5	2860	0.030	0.090						
	1000	18×35.5	3510	0.027	0.081						
	1200	18×40	3860	0.026	0.076						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Rubycon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)