

# P-CHANNEL LATERAL POWER MOSFET FOR AUDIO

## ALF16P16K/ALF16P20K

- Designed specifically for linear audio amplifier applications
- High-speed for high bandwidth amplifiers
- High voltage rating – 160V & 200V
- TO-3 metal package
- Enhanced oscillation suppression in multi-device applications
- Complimentary N-channel available – ALF16N16K/ALF16N20K



## ABSOLUTE MAXIMUM RATINGS

( $T_C = 25^\circ\text{C}$  unless otherwise stated)

		ALF16P16K	ALF16P20K
$V_{DSS}$	Drain – Source Voltage	-160V	-200V
$V_{GSS}$	Gate – Source Voltage		$\pm 20\text{V}$
$I_D$	Continuous Drain Current		-16A
$I_{DR}$	Body Drain Diode Current		-16A
$P_D$	Allowable Power Dissipation $T_{case} = 25^\circ\text{C}$		250W
$T_{ch}$	Channel Temperature		150°C
$T_{stg}$	Storage Temperature Range		-55 to +150°C

## THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction To Case			0.5	$^\circ\text{C/W}$

Magnatec reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Magnatec is believed to be both accurate and reliable at the time of going to press. However Magnatec assumes no responsibility for any errors or omissions discovered in its use. Magnatec encourages customers to verify that datasheets are current before placing orders.


**ELECTRICAL CHARACTERISTICS** ( $T_C = 25^\circ\text{C}$  unless otherwise stated)

Symbols	Parameters	Test Conditions	Min	Typ	Max	Units
$BV_{DSX}$	Drain-Source Breakdown Voltage	$V_{GS} = 10\text{V}$	ALF16P16K	-160		V
		$I_D = -10\text{mA}$	ALF16P20K	-200		
$I_{GSS}$	Gate-Source Leakage Current	$V_{DS} = 0$ $V_{GS} = \pm 20\text{V}$			100	$\mu\text{A}$
$V_{GS(\text{off})}$	Gate-Source Cut-off Voltage	$V_{DS} = -10\text{V}$ $I_D = -100\text{mA}$	-0.1		-1.5	V
$V_{DS(\text{sat})}^*$	Drain-Source Saturation Voltage	$V_{GD} = 0$ $I_D = -16\text{A}$			-12	V
$ y_{fs} ^*$	Forward Transfer Admittance	$V_{DS} = -10\text{V}$ $I_{DS} = -3\text{A}$	1.4		4	S( $\Omega$ )
$I_{DSX}$	Drain-Source Cut-Off Current	$V_{GS} = -10\text{V}$	$V_{DS} = -160\text{V}$		-10	mA
			$V_{DS} = -200\text{V}$		-10	

\* Pulse Test: Pulse Width = 300 $\mu\text{s}$ , Duty Cycle  $\leq 2\%$







**DYNAMIC CHARACTERISTICS**

$C_{iss}$	Input Capacitance	$V_{GS} = 0$		1800		pF
$C_{oss}$	Output Capacitance	$V_{DS} = -10\text{V}$		800		
$C_{rss}$	Reverse Transfer Capacitance	$f = 1.0\text{MHz}$		50		
$t_{on}$	Turn-On Time	$V_{DS} = -20\text{V}$		150		ns
$t_{off}$	Turn-Off Time	$I_D = -7\text{A}$		100		


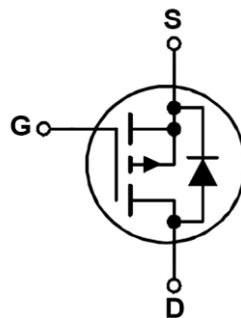


Please Note: These lateral mosfets do not include a G-S protection network and care must therefore be taken with static handling precautions and the appropriate protection in the amplifier circuit. Please refer to the application notes for more information.

**GENERAL CHARACTERISTICS** ( $T_C = 25^\circ\text{C}$  unless otherwise stated)

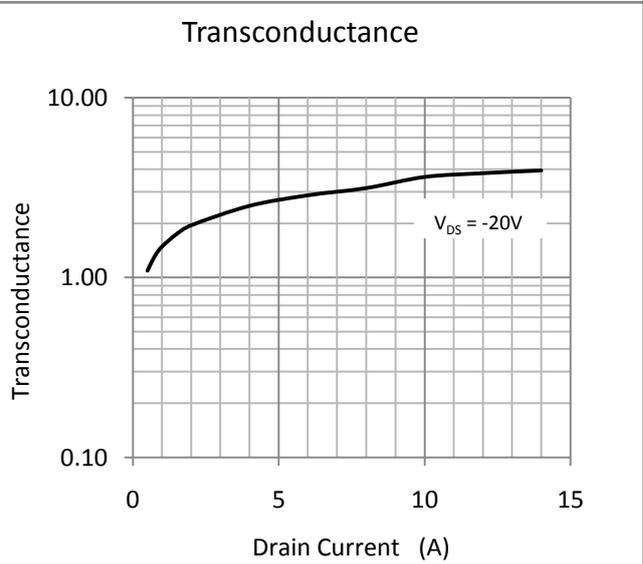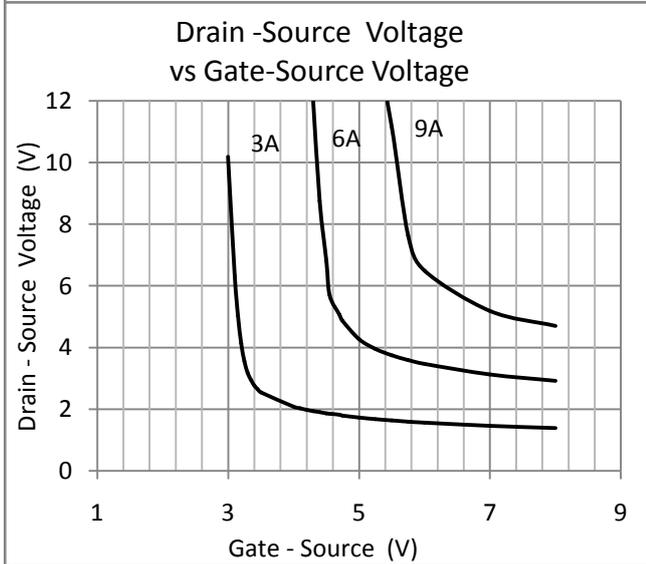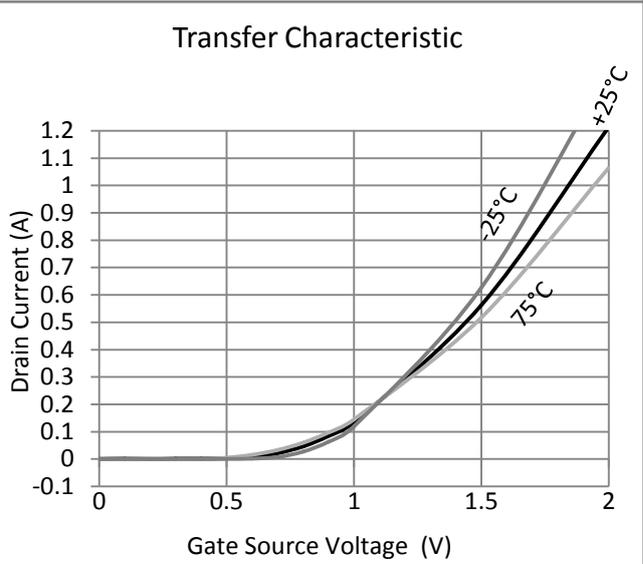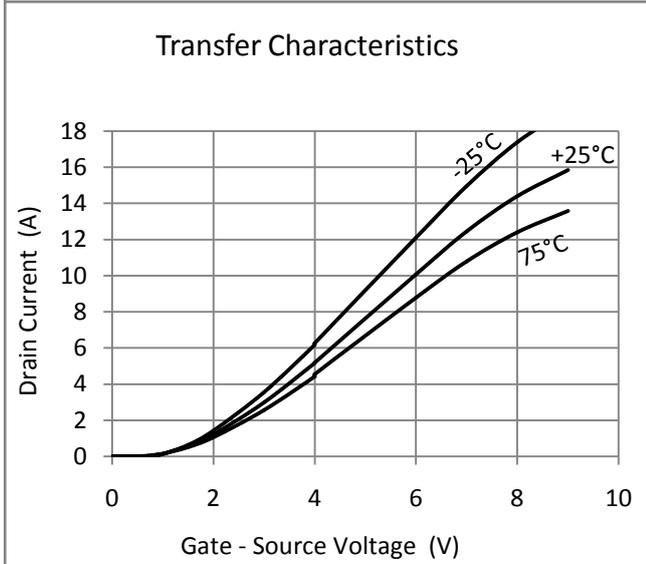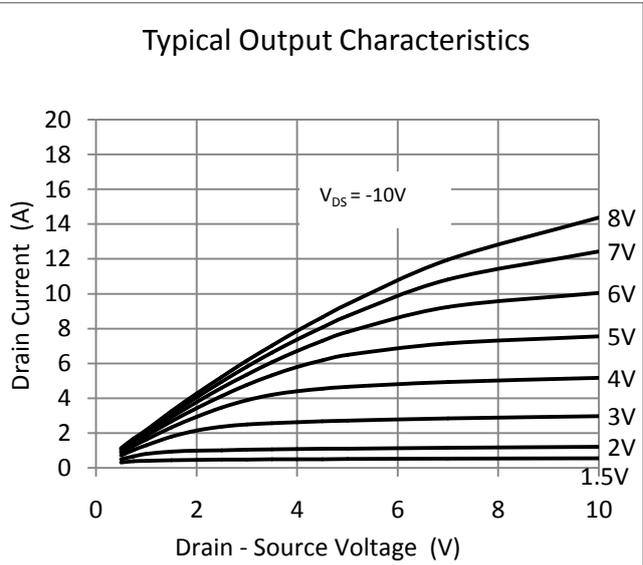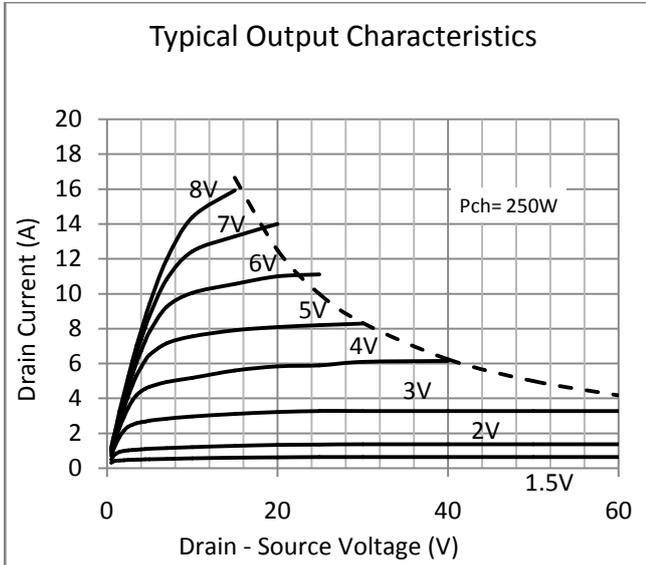


**GENERAL CHARACTERISTICS CONTINUED** ( $T_C = 25^\circ\text{C}$  unless otherwise stated)

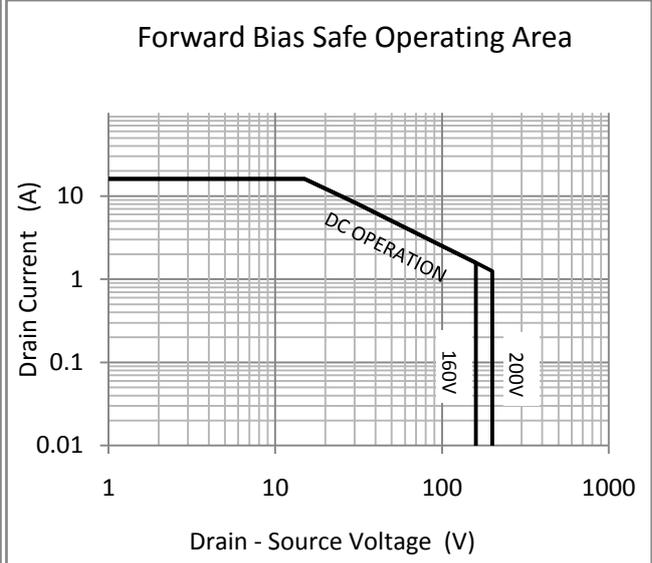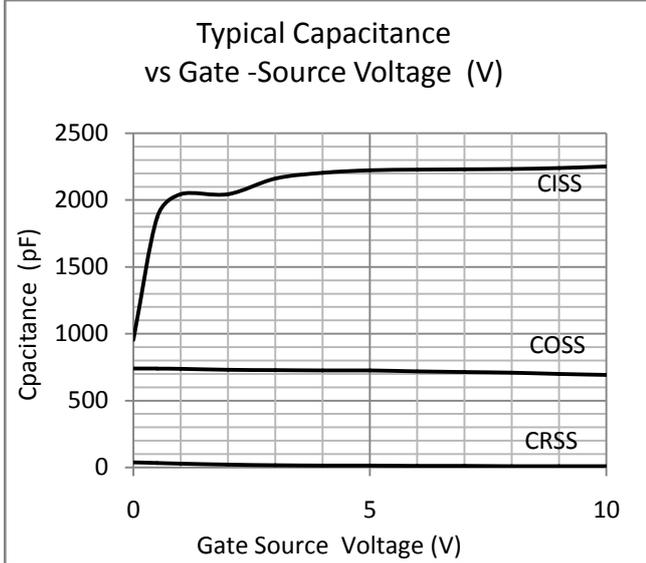

**MECHANICAL DATA**

Dimensions in mm

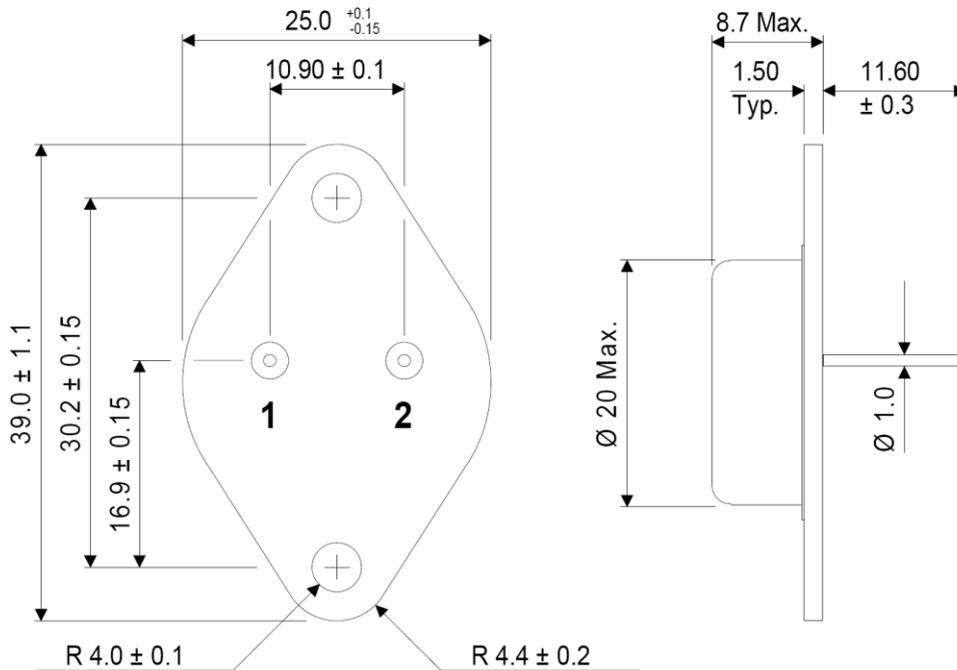

**TO-3**

Pin 1 – Gate

Pin 2 – Drain

Case – Source

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [tt electronics](#) manufacturer:*

Other Similar products are found below :

[L083S392LF](#) [L061S391LF](#) [L091S224LF](#) [L061S220LF](#) [BCN164A562J7](#) [BCN164AB470J7](#) [898-3-R150K](#) [89XR1KLF](#) [67WR200KLFTB](#)  
[68XR2MEG](#) [72XR2.5K](#) [82PR25K](#) [84WR10KTR](#) [OPB660N](#) [OPB842W51Z](#) [OPB870T55](#) [OPF430](#) [P110KV1-0Y20BR50K](#) [P170SP1-](#)  
[FC15AR10K](#) [89XHR10K](#) [L083C101](#) [91XR5K](#) [SML100M12MSF](#) [PFC-W0805LF-03-2870-B](#) [2627](#) [CR200L.5](#) [RC07GF220J](#) [RC55LF-D-](#)  
[196R-B-B](#) [3371R5KL.5](#) [HM00-01800](#) [3371R5KL.25](#) [L083C122](#) [WH25-47RJI](#) [WH5-100RJI](#) [040585XM](#) [CHP1-100-1R00-F](#) [OPB471T11](#)  
[OPB70DWZ](#) [OPB817Z](#) [OPB830W11Z](#) [OPB972T51](#) [OPT-LY-04FL](#) [WMHP100-50RF](#) [W23-15RJI](#) [L083S331LF](#) [WH50-5R6JB006](#) [WH50-](#)  
[330RJI](#) [WH200-R10JI](#) [W23-22RJI](#) [W23-22KJI](#)