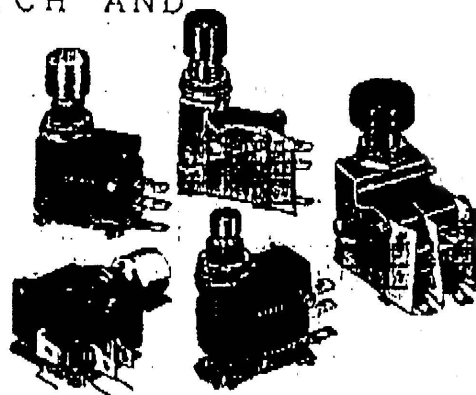






VAQ PUSHBUTTON SWITCH

EMPLOYS MODEL V MICRO SWITCH AND MOST SUITABLE TO GENERAL INDUSTRIAL MACHINE

- High reliability and various types available employing model V micro switch
- 3 pushbutton types and V button colors available
- Prepared rock type besides momentary type



TYPES

TYPE OF PUSHBUTTON		COLOR OF BUTTON						
		BLUE(A)	BLACK(B)	GREEN(G)	RED(R)	WHITE(W)	YELLOW(Y)	
 #13 11.4	1	1VAQ-4A-K	1VAQ-4B-K	1VAQ-4G-K	1VAQ-4R-K	1VAQ-4W-K	1VAQ-4Y-K	
	1	1VAQ-4A-L	1VAQ-4B-L	1VAQ-4G-L	1VAQ-4R-L	1VAQ-4W-L	1VAQ-4Y-L	
	2	2VAQ-4A	2VAQ-4B	2VAQ-4G	2VAQ-4R	2VAQ-4W	2VAQ-4Y	
	 #16.8 16.8	1	1VAQ-15A-L	1VAQ-15B-L	1VAQ-15G-L	1VAQ-15R-L	1VAQ-15W-L	1VAQ-15Y-L
		2	2VAQ-15A	2VAQ-15B	2VAQ-15G	2VAQ-15R	2VAQ-15W	2VAQ-15Y
		 #19 19	1	1VAQ-36A-L	1VAQ-36B-L	1VAQ-36G-L	1VAQ-36R-L	1VAQ-36W-L
 #13 11.4	1		1VAQR-4A	1VAQR-4B	1VAQR-4G	1VAQR-4R	1VAQR-4W	1VAQR-4Y
	2	2VAQR-4A	2VAQR-4B	2VAQR-4G	2VAQR-4R	2VAQR-4W	2VAQR-4Y	

Type of pushbutton is classified according to required panel thickness.

RATINGS

Micro switch	Rated Voltage(V)	Non-inductive load		Inductive load	
		Resistive	Lamp load	Inductive	Motor
V-15-1A5	AC 125	15	2	10	3
	250	15	2	10	3
	DC 8	15	4	10	8
	30	10	4	10	4
	125	0.6	0.1	0.6	0.1
	250	0.3	0.05	0.3	0.05

Notes: 1. Inductive load has a power factor of 0.4 min. (AC) and a time constant of 7 msec max. (DC).

2. Lamp load has an inrush current of 10 times the steady-state current, while motor load has an inrush current of 8 times the steady-state current.

3. The specifications shown in the above table apply to the types with a contact gap of 1 mm.


PAGE 2/2

FROM: F.SAITO/18040

We have two types of button for VAQ series as follows;

(One-touch type)


<u>TYPE NAME</u>	<u>BUTTON COLOR</u>
VAQ-BA	BLUE
VAQ-BB	BLACK
VAQ-BG	GREEN
VAQ-BR	RED
VAQ-BW	WHITE
VAQ-BY	YELLOW

APPLICABLE VAQ SWITCH

VAQ-4 () -K

(Screw type)

<u>TYPE NAME</u>	<u>BUTTON COLOR</u>
VAQ-HEAD SCREW A	BLUE
VAQ-HEAD SCREW B	BLACK
VAQ-HEAD SCREW G	GREEN
VAQ-HEAD SCREW O	ORANGE
VAQ-HEAD SCREW R	RED
VAQ-HEAD SCREW W	WHITE
VAQ-HEAD SCREW Y	YELLOW

APPLICABLE VAQ SWITCH

VAQ- () () -L, VAQR- () ()
 2VAQ- () (), 2VAQR- () ()

Please confirm which type is required by customer and let us know the type name by return.

Best regards,

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switch Hardware](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[893102000](#) [LZZ1A](#) [0098.9234](#) [61-9707.7](#) [61-9771.0](#) [M2PA-5011](#) [635401](#) [6PA104](#) [6PA113](#) [6PA147-E6](#) [6PA148-E6](#) [6PA32](#) [6PA9](#) [700106](#)
[700109](#) [700201A56](#) [700303A56](#) [700701264](#) [700C1GRY](#) [700C2GRN](#) [704-6001](#) [704.960.4](#) [704.960.9](#) [704.965.1](#) [704.965.2](#) [704.965.6](#)
[704.966.0](#) [7089-3](#) [71M1048](#) [757200264](#) [778000A56](#) [79215938](#) [MHU35](#) [MHU37](#) [825.003.011](#) [825.005.011](#) [825.053.011](#) [825.055.011](#)
[826.000.071](#) [827.020.011](#) [827.400.021](#) [835.900.023](#) [MML52C10C](#) [MML52E10C](#) [MML72EEK](#) [MML92HGH](#) [MML93K](#) [84211M02CNNS](#)
[84211M02LGRS](#) [84211M02LNNX3](#)