


Keysight Technologies

HMMC-5620

6-20 GHz High-Gain Amplifier

Data Sheet

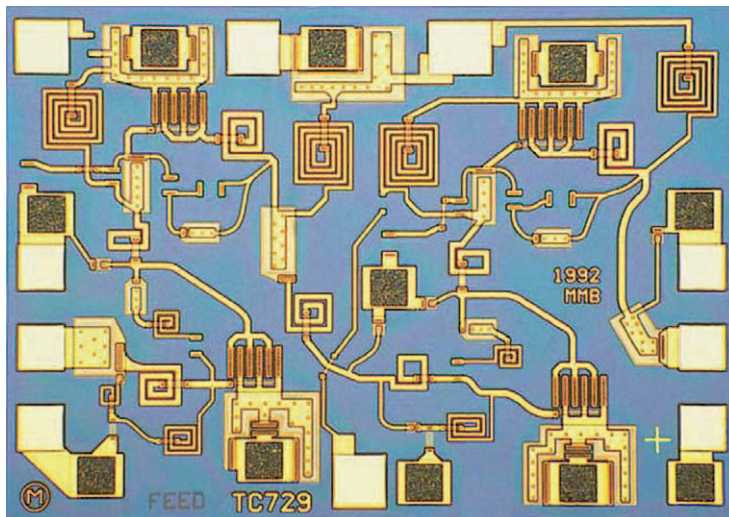


Features

- Wide-frequency range: 6-20 GHz
- High gain: 17 dB
- Gain flatness: ± 1.0 dB
- Return loss:
 - Input -15 dB
 - Output -15 dB
- Single bias supply operation
- Low DC power dissipation:
 - $P_{DC} \sim 0.5$ watts
- Medium power:
 - 20 GHz:
 - $P_{-1\text{ dB}}$: 12 dBm
 - P_{sat} : 13 dBm

Description

The Keysight Technologies, Inc. HMMC-5620 is a wideband GaAs MMIC amplifier designed for medium output power and high gain over the 6 to 20 GHz frequency range. Four MESFET cascade stages provide high gain, while the single bias supply offers ease of use. E-Beam lithography is used to produce gate lengths of $\sim 0.3 \mu\text{m}$. The HMMC-5620 incorporates advanced MBE technology, Ti-Pt-Au gate metallization, silicon nitride passivation, and polyimide for scratch protection.

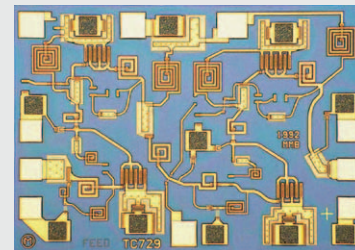

Chip size:

$1410 \times 1010 \mu\text{m}$ (55.5×39.7 mils)

Chip size tolerance:

$\pm 10 \mu\text{m}$ (± 0.4 mils)

Chip thickness:

$127 \pm 15 \mu\text{m}$ (5 ± 0.6 mils)

Pad dimensions:

$80 \times 80 \mu\text{m}$ (2.95×2.95 mils),
or larger

Absolute Maximum Ratings¹

| Symbol | Parameters/conditions | Min | Max | Units |
|------------|--|------|------|--------------------|
| V_{DD} | Positive drain voltage | | 7.55 | volts |
| I_{DD} | Total drain current | -3.0 | 135 | mA |
| P_{DC} | DC power dissipation | | 1.0 | watts |
| P_{in} | CW input power | | 20 | dBm |
| T_{ch} | Operating channel temperature | | +160 | $^{\circ}\text{C}$ |
| T_{case} | Operating case temperature | -55 | | $^{\circ}\text{C}$ |
| T_{st} | Storage Temperature | -65 | +165 | $^{\circ}\text{C}$ |
| T_{max} | Maximum Assembly Temperature (for 60 seconds max.) | | 300 | $^{\circ}\text{C}$ |

1. Operation in excess of any one of these conditions may result in permanent damage to this device.
 $T_A = 25 \text{ }^{\circ}\text{C}$ except for T_{ch} , T_{stg} , and T_{max} .

DC Specifications/Physical Properties¹

| Symbol | Parameters/conditions | Min. | Typ. | Max | Units |
|------------------|---|------|------|-----|--------------------------------|
| I_{DD} | Drain current ($V_{DD} = +5.0 \text{ V}$) | 100 | 70 | 135 | mA |
| I_{DD} | Drain current ($V_{DD} = +7.0 \text{ V}$) | 105 | | | mA |
| θ_{ch-bs} | Thermal resistance ($T_{backside} = 25 \text{ }^{\circ}\text{C}$) | 70 | | | $^{\circ}\text{C}/\text{Watt}$ |

1. Measured in wafer form with $T_{chuck} = 25 \text{ }^{\circ}\text{C}$. (Except θ_{ch-bs})

RF Specifications/Physical Properties

($V_{DD} = 5.0$ V, $I_{DD}(Q) = 100$ mA, $Z_{in} = Z_o = 50 \Omega$)¹

| Symbol | Parameters/conditions | 6.0-20.0 GHz | | | Units |
|--------------------|--|--------------|------|------------|-------|
| | | Typ. | Min. | Max. | |
| BW | Guaranteed bandwidth | | 6 | 20 | GHz |
| S_{21} | Small signal gain | 17 | 15 | 21 | dB |
| ΔS_{21} | Small signal gain flatness | ± 1.0 | | ± 1.25 | dB |
| (RL_{in}) | Input return loss | -15 | | -10 | dB |
| (RL_{out}) | Output return loss | -15 | | -10 | dB |
| S_{12} | Reverse isolation | -55 | | | dB |
| $P_{-1\text{ dB}}$ | Output power at 1 dB gain compression | 12 | | | dBm |
| P_{SAT} | Saturated output power | 13 | | | dBm |
| H_2 | Second harmonic, ($6 < f_o < 20$) ($P_o(f_o) = 10$ dBm) | -30 | | | dBc |
| H_3 | Third harmonic, ($6 < f_o < 20$) ($P_o(f_o) = 10$ dBm) | -40 | | | dBc |
| NF | Noise figure | 9.0 | | | dB |

1. Small-signal data measured in wafer form with $T_{chuck} = 25$ °C.

Large-signal data measured on individual devices mounted in an Keysight 83040 series modular microcircuit package @ $T_A = 25$ °C.

Applications

The HMMC-5620 amplifier is designed for use as a general purpose wideband, high gain stage in communication systems and microwave instrumentation. It is ideally suited for broadband applications requiring high gain and excellent port matches over a 6 to 20 GHz frequency range. Both RF input and output ports are AC-coupled on chip.

Biasing and Operation

This amplifier is biased with a single positive drain supply (VDD). The recommended bias for the HMMC-5620 is $V_{DD} = 5.0$ V, which results in $I_{DD} = 100$ mA (typ.). No other bias supplies or connections to the device are required for 6 to 20 GHz operation. See Figure 3 for assembly information.

Assembly Techniques

For RF bonds, MWTC recommends low inductance mesh interconnections for best return loss performance. GaAs MMICs are ESD sensitive. ESD preventive measures must be employed in all aspects of storage, handling, and assembly.

MMIC ESD precautions, handling considerations, die attach and bonding methods are critical factors in successful GaAs MMIC performance and reliability.

GaAs MMIC ESD, Die Attach and Bonding Guidelines, Application Note (5991-3484EN) provides basic information on these subjects.

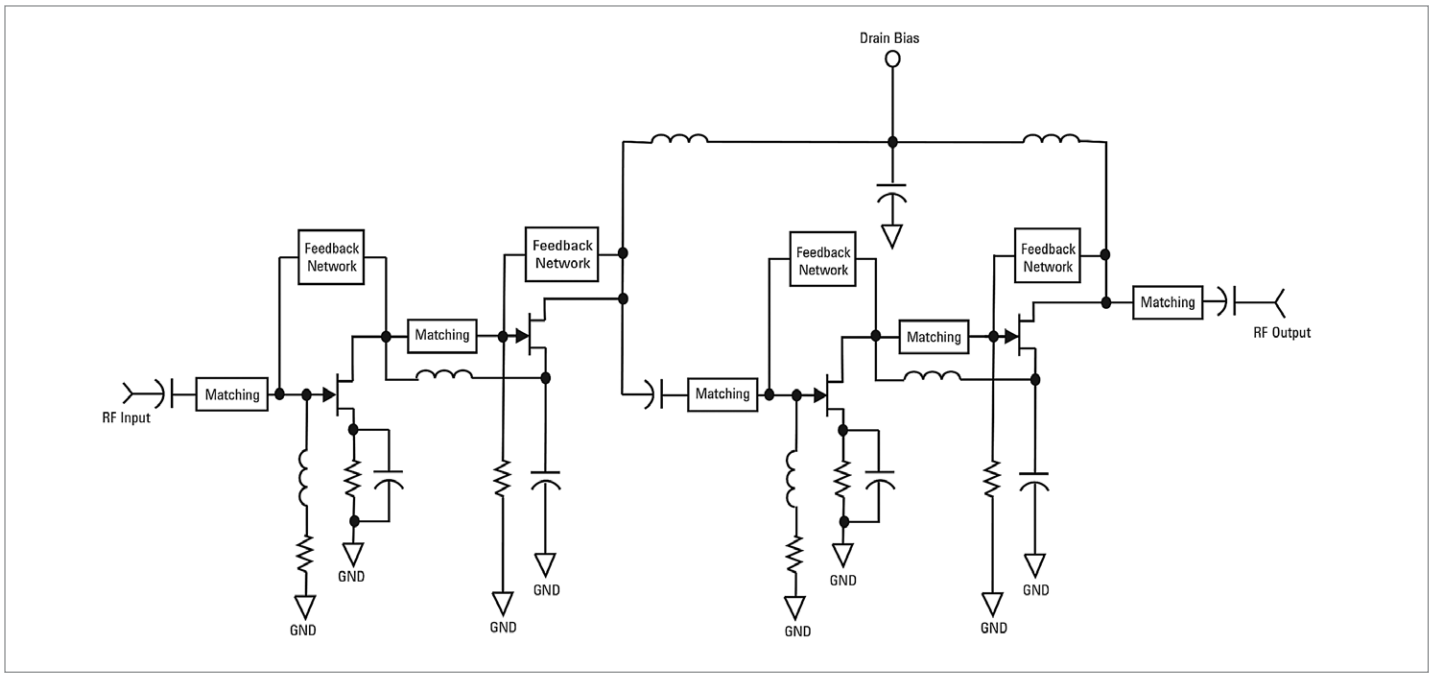


Figure 1. Simplified schematic diagram

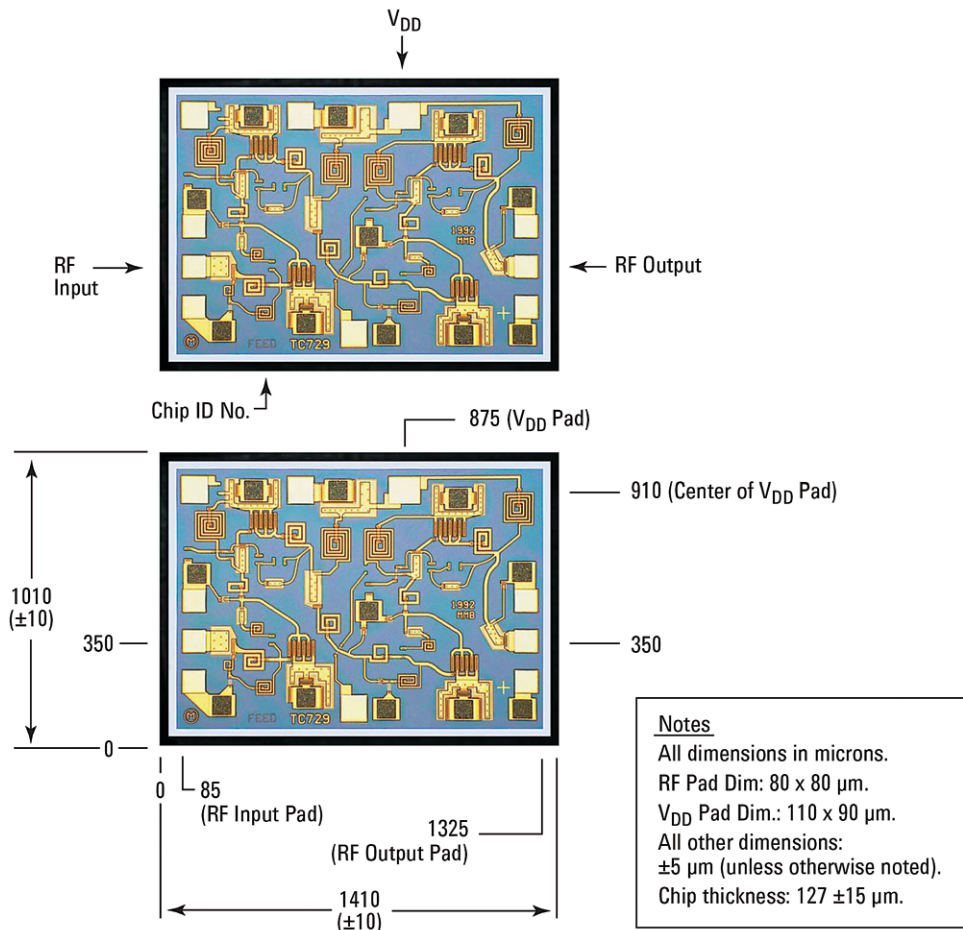


Figure 2. Bond pad locations

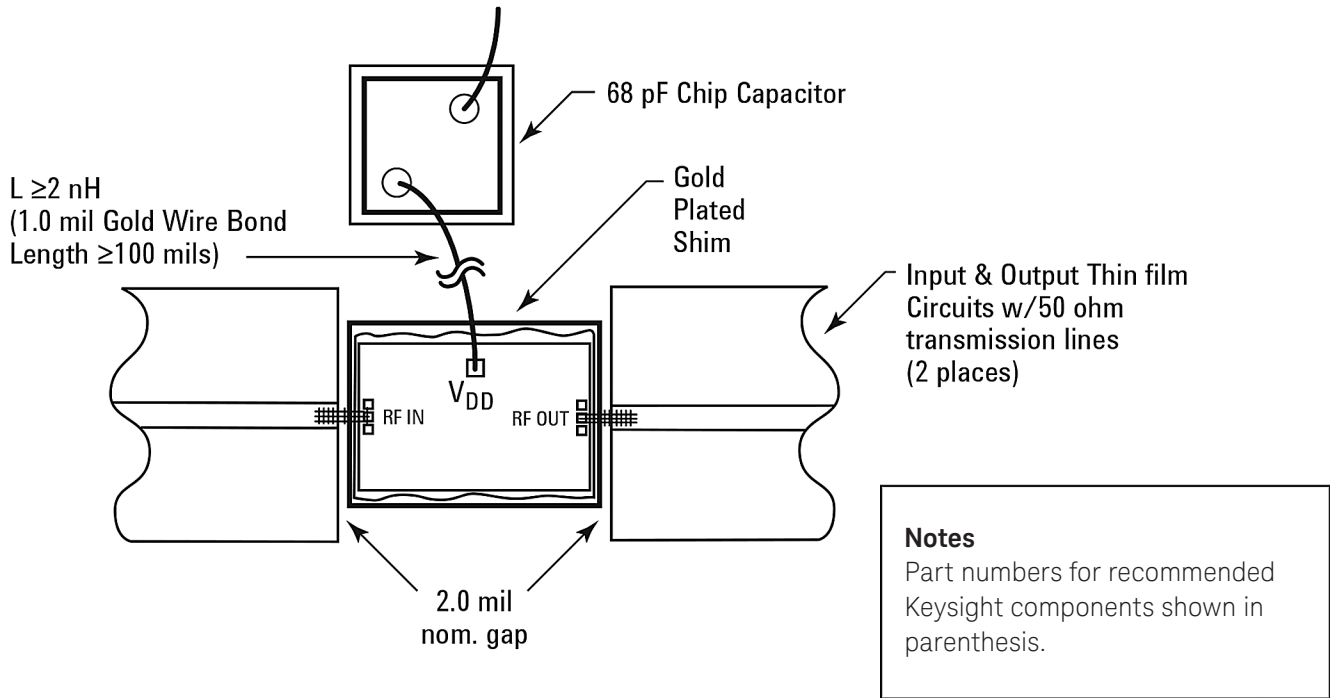


Figure 3. Assembly diagram (For 6.0-20.0 GHz operation)

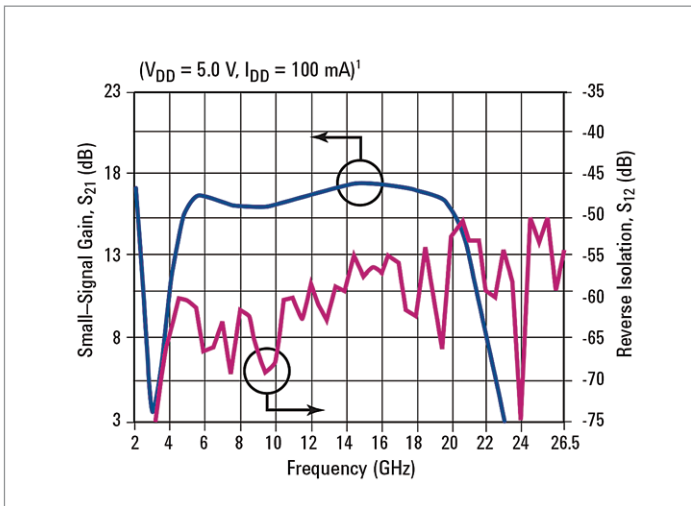


Figure 4. Typical gain and reverse isolation vs. frequency

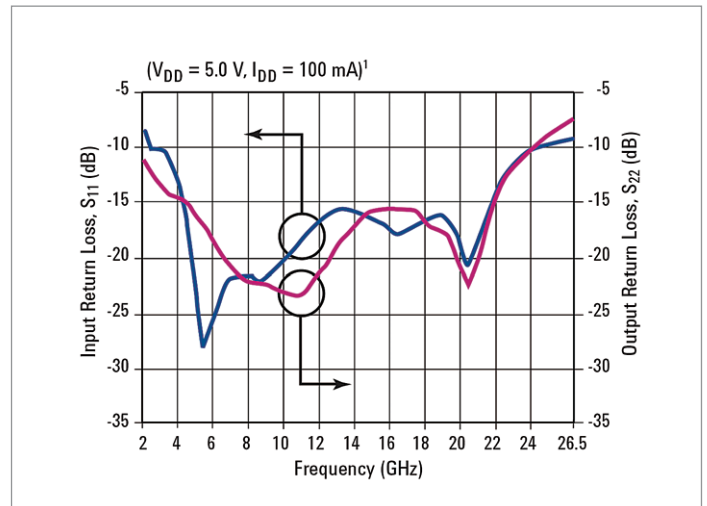


Figure 5. Typical input and output return loss vs. frequency

Typical S-Parameters¹

($T_{\text{chuck}} = 25\text{ }^{\circ}\text{C}$, $V_{\text{DD}} = 5.0\text{ V}$, $I_{\text{DD}} = 100\text{ mA}$, $Z_{\text{in}} = Z_{\text{o}} = 5\text{ }\Omega$)

| Freq. (GHz) | S ₁₁ | | | S ₁₂ | | | S ₂₁ | | | S ₂₂ | | |
|----------------|-----------------|-------|--------|-----------------|--------|--------|-----------------|-------|--------|-----------------|-------|--------|
| | dB | Mag | Ang | dB | Mag | Ang | dB | Mag | Ang | dB | Mag | Ang |
| 2.0 | -10.7 | 0.292 | -100.3 | -46.1 | 0.0049 | -174.7 | -6.2 | 0.491 | -52.2 | -8.1 | 0.395 | -152.2 |
| 3.0 | -13.5 | 0.212 | -117.5 | -74.1 | 0.0002 | 114.0 | 3.5 | 1.489 | -170.0 | -10.1 | 0.311 | -171.5 |
| 4.0 | -14.6 | 0.186 | -136.6 | -63.1 | 0.0007 | -122.1 | 13.0 | 4.486 | 82.2 | -12.7 | 0.232 | 136.5 |
| 5.0 | -15.8 | 0.162 | -168.9 | -60.4 | 0.0010 | -161.8 | 16.0 | 6.310 | -26.5 | -21.7 | 0.082 | 61.5 |
| 6.0 | -18.4 | 0.120 | 157.5 | -66.5 | 0.0005 | 162.7 | 16.7 | 6.839 | -116.8 | -25.7 | 0.052 | -86.6 |
| 7.0 | -20.9 | 0.090 | 123.0 | -62.7 | 0.0007 | -175.3 | 16.3 | 6.531 | 173.2 | -22.1 | 0.079 | -131.4 |
| 8.0 | -22.2 | 0.078 | 83.1 | -61.3 | 0.0009 | -178.0 | 16.0 | 6.310 | 114.2 | -21.7 | 0.082 | -150.6 |
| 9.0 | -21.9 | 0.080 | 41.3 | -66.5 | 0.0005 | -62.4 | 16.0 | 6.310 | 60.2 | -22.5 | 0.075 | -156.7 |
| 10.0 | -20.2 | 0.097 | 6.6 | -68.1 | 0.0004 | -159.3 | 16.1 | 6.383 | 9.0 | -23.2 | 0.070 | -152.9 |
| 11.0 | -18.4 | 0.120 | -21.0 | -60.0 | 0.0010 | -113.5 | 16.3 | 6.531 | -40.7 | -23.4 | 0.067 | -143.0 |
| 12.0 | -16.7 | 0.146 | -46.4 | -58.3 | 0.0012 | -112.2 | 16.6 | 6.761 | -89.9 | -21.5 | 0.084 | -136.8 |
| 13.0 | -15.8 | 0.161 | -70.0 | -62.7 | 0.0007 | -130.0 | 17.0 | 7.079 | -139.4 | -19.1 | 0.111 | -133.7 |
| 14.0 | -15.8 | 0.163 | -90.0 | -59.3 | 0.0011 | -161.1 | 17.3 | 7.328 | 170.1 | -17.2 | 0.137 | -143.0 |
| 15.0 | -16.4 | 0.151 | -105.6 | -57.5 | 0.0013 | 173.9 | 17.4 | 7.413 | 118.6 | -16.0 | 0.159 | -152.8 |
| 16.0 | -17.5 | 0.134 | -115.4 | -57.1 | 0.0014 | -165.9 | 17.5 | 7.499 | 66.0 | -15.5 | 0.168 | -167.9 |
| 17.0 | -17.7 | 0.130 | -114.1 | -55.6 | 0.0017 | 175.5 | 17.3 | 7.328 | 12.3 | -15.5 | 0.167 | -179.7 |
| 18.0 | -16.8 | 0.145 | -118.4 | -62.3 | 0.0008 | 98.2 | 17.0 | 7.079 | -43.1 | -16.5 | 0.149 | 162.9 |
| 19.0 | -16.1 | 0.156 | -131.6 | -59.7 | 0.0010 | 112.8 | 16.7 | 6.839 | -101.9 | -17.7 | 0.130 | 145.2 |
| 20.0 | -18.5 | 0.119 | -143.8 | -52.5 | 0.0024 | 72.9 | 16.0 | 6.310 | -168.5 | -20.8 | 0.091 | 93.0 |
| 21.0 | -19.9 | 0.101 | -108.1 | -53.2 | 0.0022 | -7.1 | 15.3 | 5.842 | 119.8 | -20.4 | 0.096 | -4.3 |
| 22.0 | -14.2 | 0.195 | -107.7 | -59.3 | 0.0011 | -8.0 | 10.7 | 3.414 | 54.2 | -14.9 | 0.179 | -63.6 |
| 23.0 | -11.6 | 0.263 | -125.6 | -54.0 | 0.0020 | -54.4 | 5.4 | 1.857 | -0.4 | -12.0 | 0.250 | -93.3 |
| 24.0 | -10.3 | 0.306 | -142.2 | -75.8 | 0.0002 | -158.2 | 0.3 | 1.034 | -47.5 | -10.3 | 0.306 | -110.4 |
| 25.0 | -9.6 | 0.330 | -157.2 | -53.5 | 0.0021 | -165.8 | -4.5 | 0.595 | -90.5 | -9.0 | 0.353 | -124.2 |
| 26.0 | -9.2 | 0.347 | -169.9 | -59.0 | 0.0011 | -137.5 | -9.0 | 0.355 | -131.1 | -7.9 | 0.402 | -134.3 |
| 26.5 | -9.1 | 0.349 | -357.4 | -54.9 | 0.0018 | 78.2 | -11.2 | 0.275 | -511.3 | -7.4 | 0.426 | -140.2 |

1. Data obtained from on-wafer measurements.

Additional Performance Characteristics

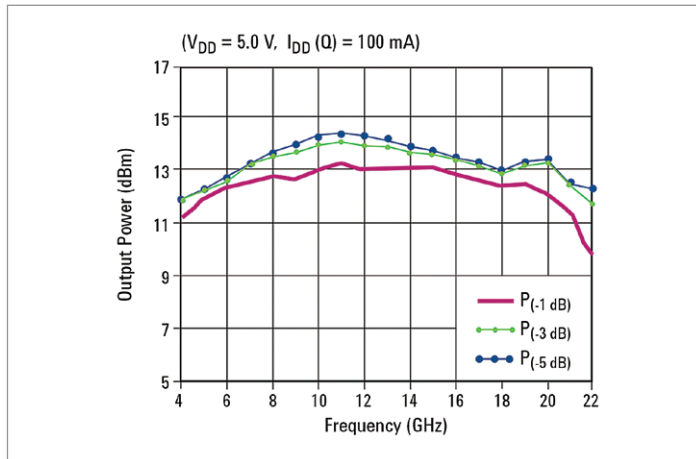


Figure 6. Typical output power vs. frequency (w/5 V bias)

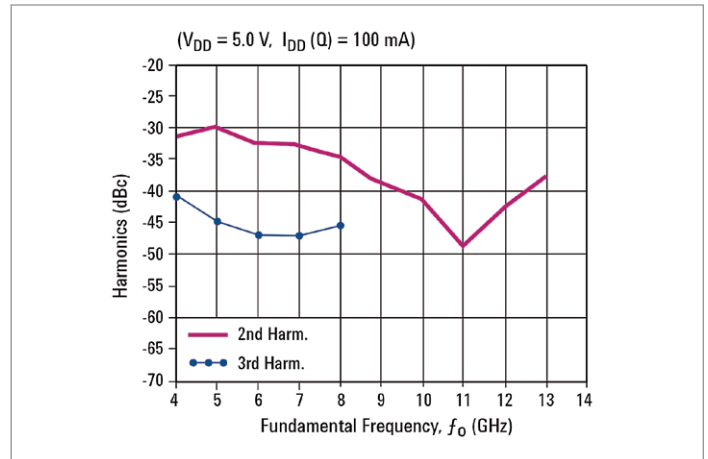


Figure 7. Typical second and third harmonics vs. fundamental frequency at $P_{out} = 10$ dBm

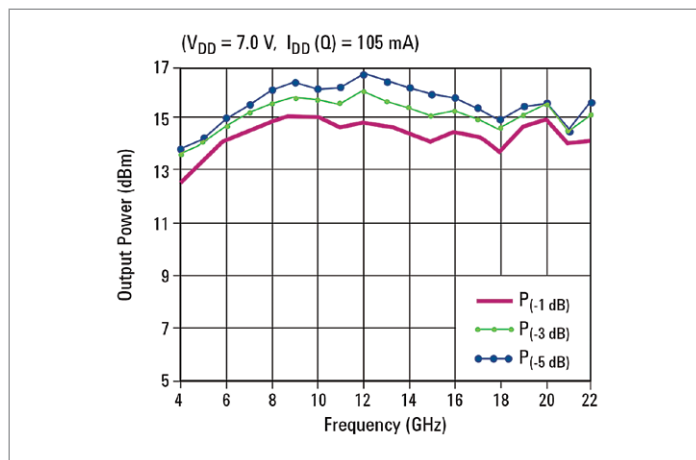


Figure 8. Typical output power vs. frequency (w/7 V bias)

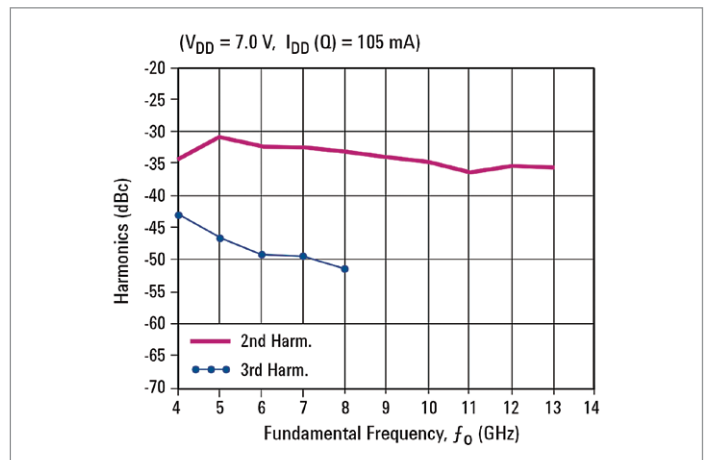


Figure 9. Typical second and third harmonics vs. fundamental frequency at $P_{out} = 10$ dBm

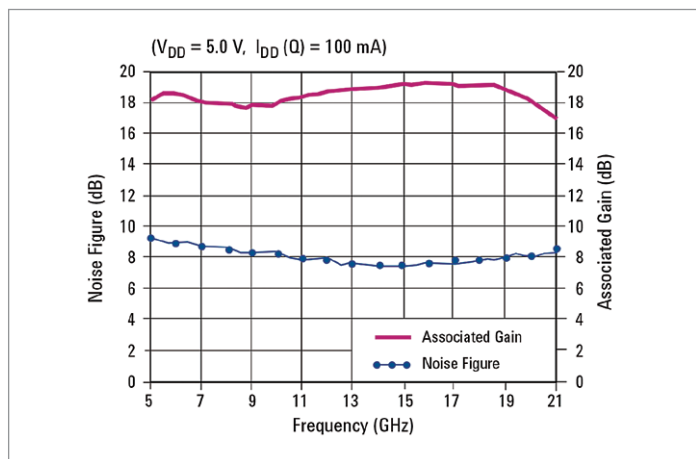


Figure 10. Typical noise figure performance vs. frequency

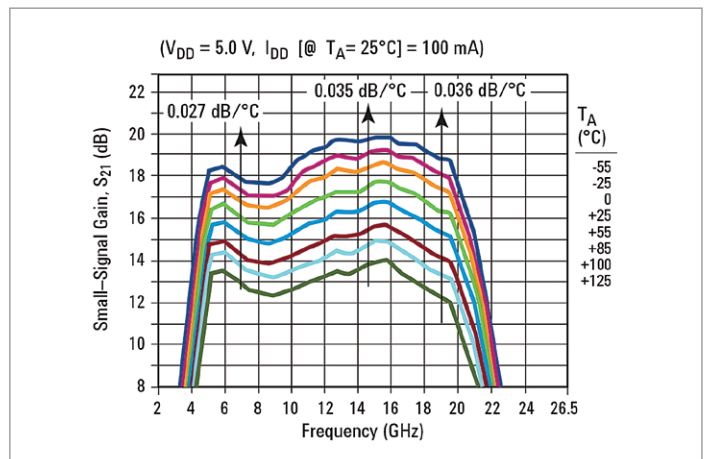


Figure 11. Typical small-signal gain vs. temperature

Note: All data measured on individual devices mounted in an 83040 series modular microcircuit package @ $T_A = 25$ °C, except where noted.

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight’s commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2008

Quality Management System



Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight’s measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/mmic

This data sheet contains a variety of typical and guaranteed performance data. The information supplied should not be interpreted as a complete list of circuit specifications. Customers considering the use of this, or other Keysight Technologies GaAs ICs, for their design should obtain the current production specifications from Keysight Technologies. In this data sheet the term typical refers to the 50th percentile performance. For additional information contact Keysight Technologies at MMIC_Helpline@keysight.com.

For more information on Keysight Technologies’ products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 0800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-07-10-14)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [keysight](#) manufacturer:

Other Similar products are found below :

[34904A](#) [U5404A](#) [U3606B](#) [U3400A-1CM](#) [U1461A](#) [U1281A](#) [U1251B](#) [U1233A](#) [U1194A](#) [U1185A](#) [E3640A](#) [E3634A](#) [DSOX3014T](#) [10833F](#)
[N3307A](#) [U1117A](#) [U1232A](#) [U1452A](#) [82350C](#) [34460A](#) [N2782B](#) [N6773A](#) [10074D](#) [DAQA194A](#) [33511B/903](#) [N2779A/903](#) [N2820A](#) [N6734B](#)
[U1780A/903](#) [U8001A/0EM/903](#) [DAQM905A](#) [E3640A/0EM/903](#) [N6743B](#) [E3634A/0EM/903](#) [E3633A/0EM/903](#) [N4837A](#) [N2891A](#)
[E3648A/0E3/902](#) [E3642A/0EM/903](#) [U2781A](#) [33522B](#) [U1115A](#) [U1594A](#) [E36313A](#) [E363GPBU](#) [N1294A-001](#) [U2941A-107](#)
[DSOX1204A+D1200BW2A](#) [N4836A](#) [E36232A/903](#)