

Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED




THIS PAGE INTENTIONALLY LEFT BLANK

Typical Applications

The HMC595 / HMC595E is ideal for:

- Cellular/3G Infrastructure
- Private Mobile Radio Handsets
- WLAN, WiMAX & WiBro
- Automotive Telematics
- Test Equipment

Functional Diagram

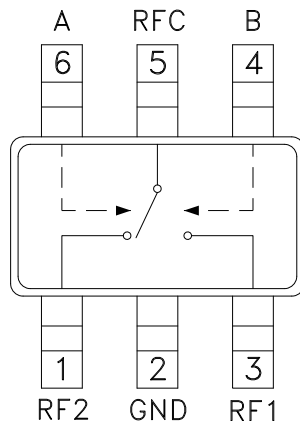

Features

- Low Insertion Loss: 0.3 dB
- High Input IP3: +65 dBm
- Isolation: 30 dB
- Positive Control: 0/+3V to 0/+10V
- Ultra Small Package: SOT26
- Included in the HMC-DK005 Designer's Kit

General Description

The HMC595 & HMC595E are low-cost SPDT switches in 6-lead SOT26 packages for use in transmit/receive applications which require very low distortion at high incident power levels. The device can control signals from DC to 3 GHz and is especially suited for Cellular/3G infrastructure, WiMAX and WiBro applications with only 0.3 dB typical insertion loss. The design provides a 3 watt power handling and +65 dBm third order intercept at +8 Volt bias. RF1 and RF2 are reflective shorts when "Off". Control inputs A & B are compatible with CMOS and some TTL logic families. These products are form, fit and function replacements for HMC195 & HMC195E while offering superior electrical performance.

Electrical Specifications,


$T_A = +25^\circ \text{C}$, $V_{ctl} = 0/+5 \text{Vdc}$ (Unless Otherwise Stated), 50 Ohm System

| Parameter | Frequency | Min. | Typ. | Max. | Units |
|---|---------------|--|------|------|-------|
| Insertion Loss | DC - 1.0 GHz | | 0.25 | 0.5 | dB |
| | DC - 2.0 GHz | | 0.3 | 0.6 | dB |
| | DC - 2.5 GHz | | 0.4 | 0.7 | dB |
| | DC - 3.0 GHz | | 0.5 | 0.8 | dB |
| Isolation | DC - 1.0 GHz | 26 | 30 | | dB |
| | DC - 2.0 GHz | 22 | 26 | | dB |
| | DC - 2.5 GHz | 18 | 24 | | dB |
| | DC - 3.0 GHz | 14 | 18 | | dB |
| Return Loss | DC - 1.0 GHz | | 30 | | dB |
| | DC - 2.0 GHz | | 25 | | dB |
| | DC - 2.5 GHz | | 22 | | dB |
| | DC - 3.0 GHz | | 20 | | dB |
| Input Power for 1dB Compression | 0.5 - 3.0 GHz | $V_{ctl} = 0/+3V$ | 32 | 35 | dBm |
| | | $V_{ctl} = 0/+5V$ | 35 | 38 | dBm |
| | | $V_{ctl} = 0/+8V$ | 37 | 39 | dBm |
| Input Third Order Intercept (Two-tone Input Power = +27 dBm Each Tone) | 0.5 - 3.0 GHz | $V_{ctl} = 0/+3V$ | | 47 | dBm |
| | | $V_{ctl} = 0/+5V$ | | 64 | dBm |
| | | $V_{ctl} = 0/+8V$ | | 65 | dBm |
| Switching Characteristics | DC - 3.0 GHz | t_{RISE}, t_{FALL} (10/90% RF) | 80 | | ns |
| | | t_{ON}, t_{OFF} (50% CTL to 10/90% RF) | 120 | | ns |


For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order On-line at www.hittite.com




Insertion Loss

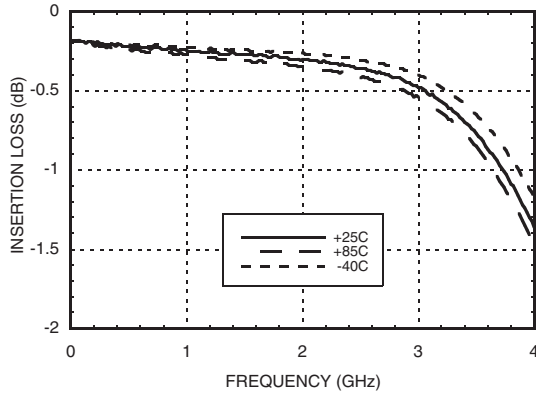


Isolation Between RFC and RF1/RF2

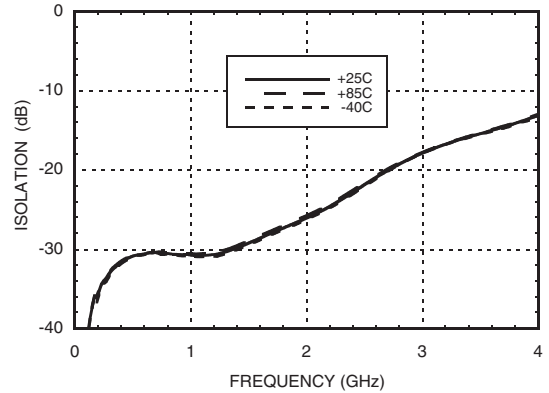


RF1 to RF2 Isolations

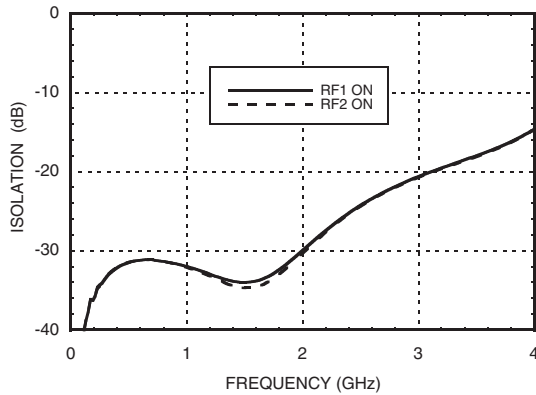


Return Loss

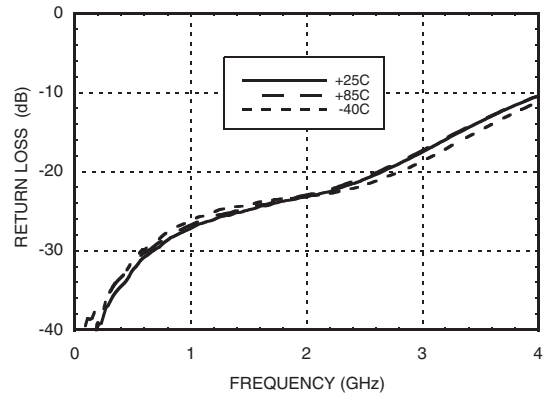

Input P0.1dB vs. Vctl

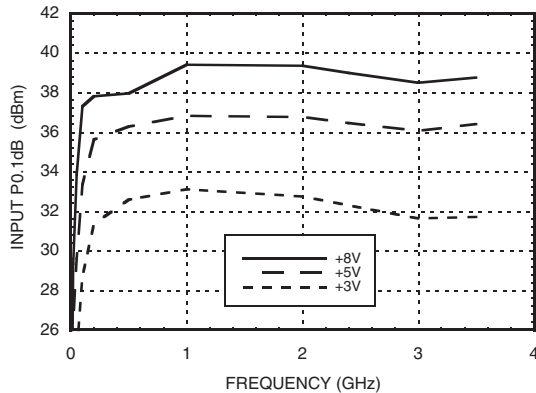


Input P1dB vs. Vctl

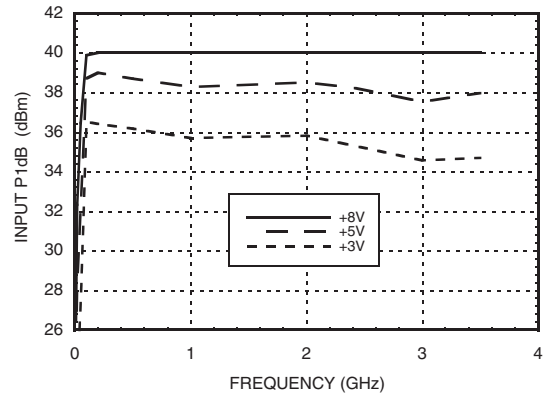




GaAs MMIC 3 WATT T/R SWITCH, DC - 3 GHz


Input IP3 vs. Input Power @ 900 MHz

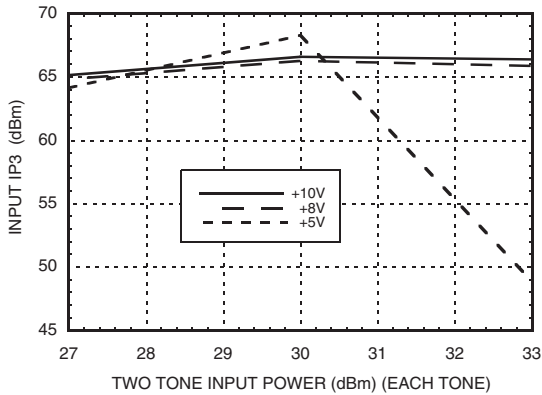


Input IP3 vs. Input Power @ 1900 MHz

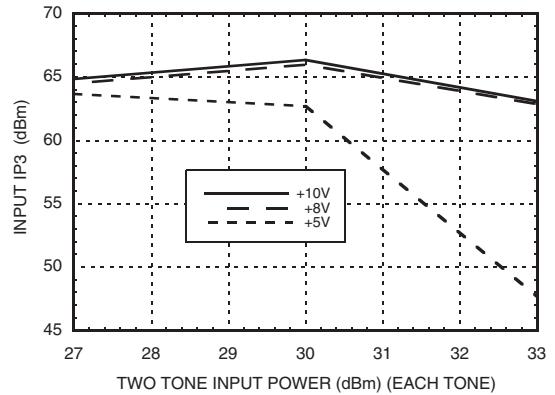


Input Third Order Intercept Point

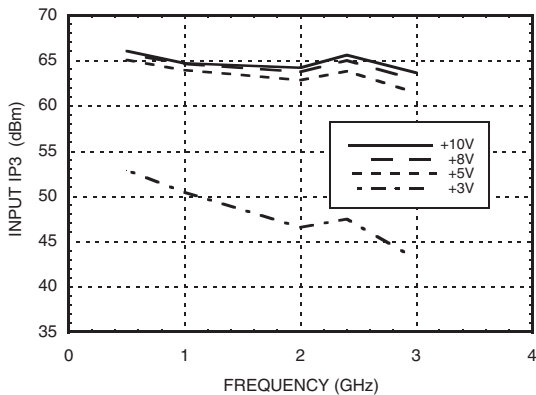


**2nd & 3rd Harmonics @ 900 MHz
Vctl = +3 Volts**

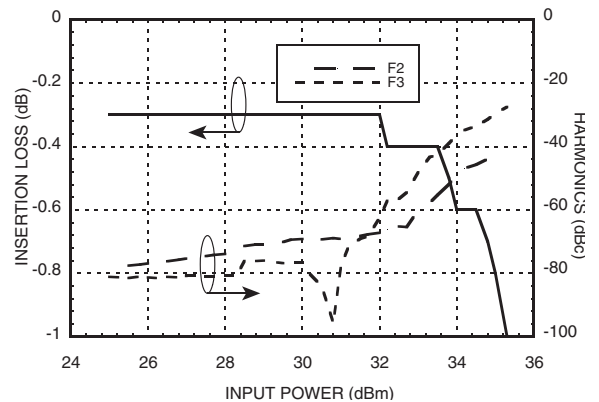

**2nd & 3rd Harmonics @ 900 MHz
Vctl = +5 Volts**

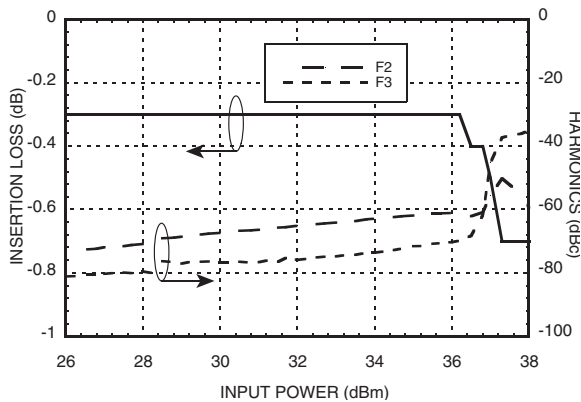

**2nd & 3rd Harmonics @ 900 MHz
Vctl = +8 Volts**

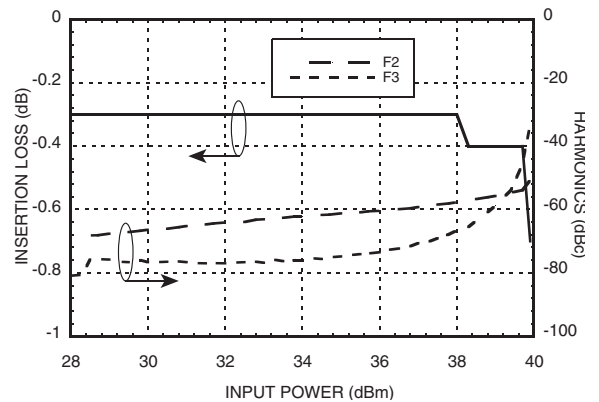


For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order On-line at www.hittite.com




**GaAs MMIC 3 WATT T/R SWITCH,
DC - 3 GHz**

Input P0.1dB vs. Vctl

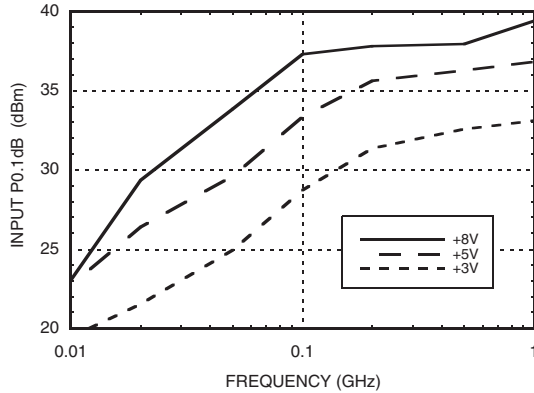

Input P1dB vs. Vctl

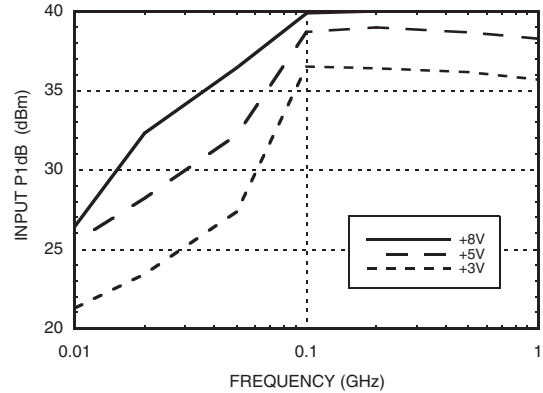

Absolute Maximum Ratings

| | | |
|--|---------------|-----------------|
| Max. Input Power $V_{ctl} = 0/+8V$ | 0.5 - 2.5 GHz | 39 dBm |
| Control Voltage Range (A & B) | | -0.2 to +12 Vdc |
| Hot Switching Power Level $V_{ctl} = 0/+8V$ | | 39 dBm |
| Channel Temperature | | 150 °C |
| Continuous Pdiss ($T = +85\text{ °C}$) (derate 6 mW/°C above 85 °C) | | 0.38W |
| Thermal Resistance | | 173 °C/W |
| Storage Temperature | | -65 to +150 °C |
| Operating Temperature | | -40 to +85 °C |
| ESD Sensitivity | | Class 1A |

DC Blocks are required at ports RFC, RF1 and RF2

Control Voltages

| State | Bias Condition |
|-------|---|
| Low | 0 to +0.2 Vdc @ 10 μ A Typical |
| High | +3 Vdc @ 2 μ A Typical to +8 Vdc @ 40 μ A Typical (± 0.2 Vdc) |

Truth Table


| Control Input (Vctl) | | Signal Path State | |
|----------------------|------|-------------------|------------|
| A | B | RFC to RF1 | RFC to RF2 |
| High | Low | Off | On |
| Low | High | On | Off |



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**



Outline Drawing

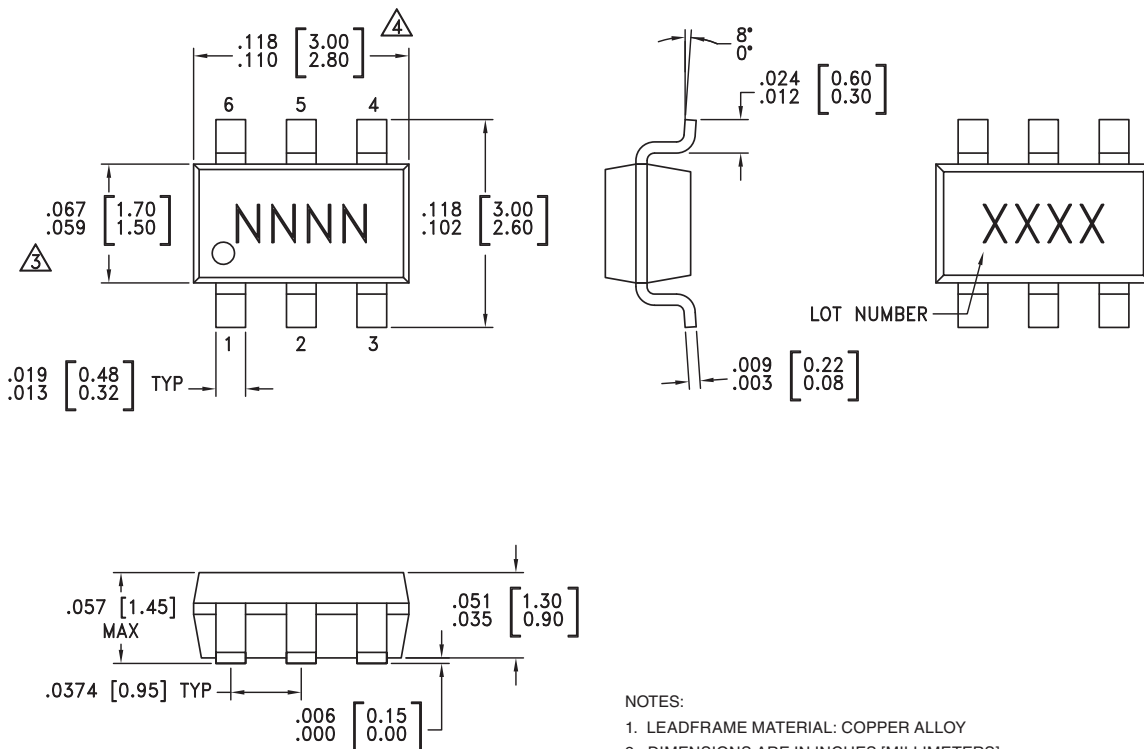

NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
- ⚠ DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
- ⚠ DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[3] |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC595 | Low Stress Injection Molded Plastic | Sn/Pb Solder | MSL1 ^[1] | H595 XXXX |
| HMC595E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | 595E XXXX |



[1] Max peak reflow temperature of 235 °C
 [2] Max peak reflow temperature of 260 °C
 [3] 4-Digit lot number XXXX

10


SWITCHES - SMT



Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|------------|---------------|---|---|
| 1, 3, 5 | RF2, RF1, RFC | This pin is DC coupled and matched to 50 Ohm. Blocking capacitors are required. | |
| 2 | GND | This pin must be connected to RF/DC ground. |  |
| 4 | B | See truth table and control voltage table. |  |
| 6 | A | See truth table and control voltage table. | |

Typical Application Circuit

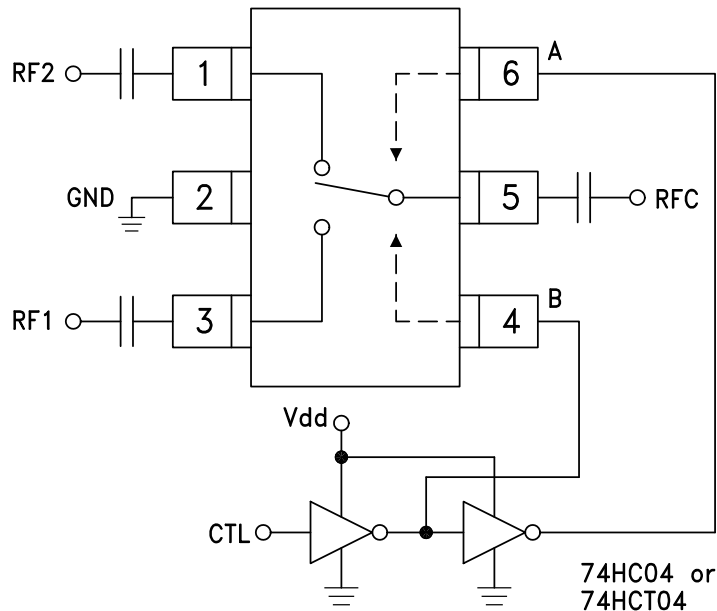


Notes:

1. Set logic gate and switch Vdd = +3V to +5V and use HCT series logic to provide a TTL driver interface.
2. Control inputs A/B can be driven directly with CMOS logic (HC) with Vdd of +3 to +8 Volts applied to the CMOS logic gates.
3. DC Blocking capacitors are required for each RF port as shown. Capacitor value determines lowest frequency of operation.
4. Highest RF signal power capability is achieved with V set to +10V. The switch will operate properly (but at lower RF power capability) at bias voltages down to +3V.

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order On-line at www.hittite.com

Evaluation Circuit Board

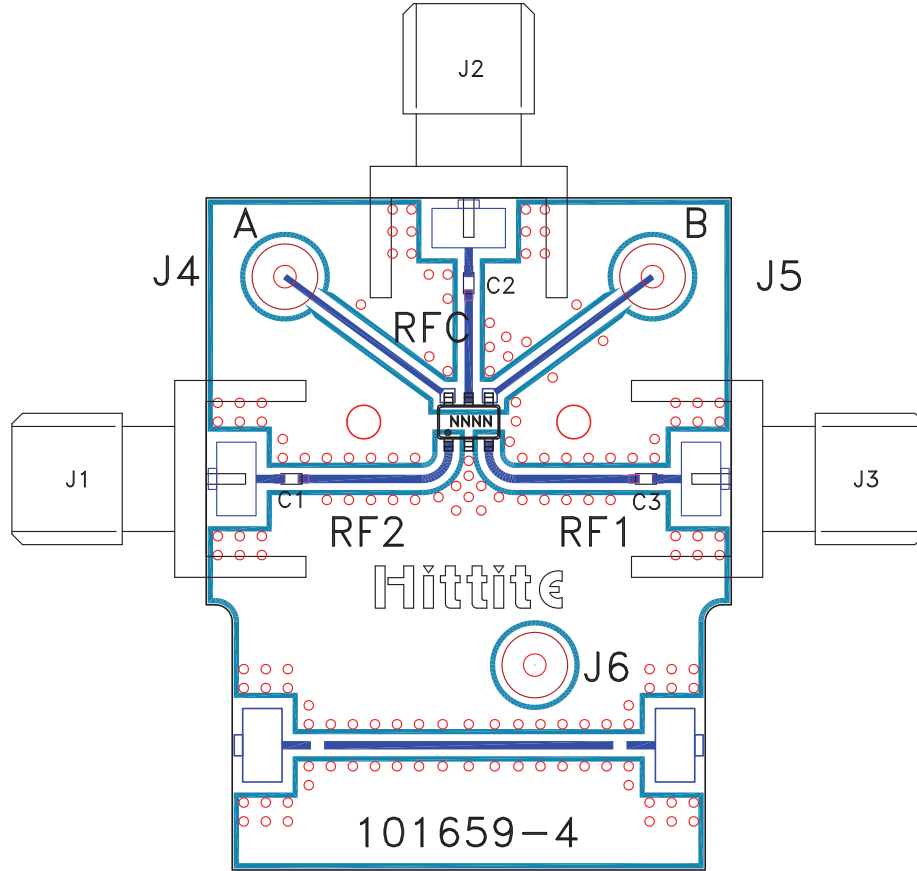

List of Materials for Evaluation PCB 101675 [1]

| Item | Description |
|---------|-----------------------------|
| J1 - J3 | PCB Mount SMA RF Connector |
| J4 - J6 | DC Pin |
| C1 - C3 | 330 pF capacitor, 0402 Pkg. |
| U1 | HMC595 / HMC595E T/R Switch |
| PCB [2] | 101659 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads and package bottom should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.



Notes:

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Switch ICs](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[MASW-007921-002SMB](#) [BGSA142GN12E6327XTSA1](#) [BGSA142MN12E6327XTSA1](#) [BGSA142M2N12E6327XTSA1](#) [MASW-004100-11930W](#) [MASW-008853-TR3000](#) [BGS13SN8E6327XTSA1](#) [BGSF18DM20E6327XUMA1](#) [BGSX210MA18E6327XTSA1](#) [BGSX212MA18E6327XTSA1](#) [SKY13446-374LF](#) [SW-227-PIN](#) [PE42524A-X](#) [CG2185X2](#) [CG2415M6](#) [MA4AGSW1A](#) [MA4AGSW2](#) [MA4AGSW3](#) [MA4AGSW5](#) [MA4SW210B-1](#) [MA4SW410](#) [MASW-002102-13580G](#) [BGS 12PL6 E6327](#) [BGS1414MN20E6327XTSA1](#) [BGS1515MN20E6327XTSA1](#) [BGSA11GN10E6327XTSA1](#) [BGSX28MA18E6327XTSA1](#) [HMC199AMS8](#) [HMC595AETR](#) [HMC986A](#) [SKY13374-397LF](#) [SKY13453-385LF](#) [CG2430X1-C2](#) [TGS4304](#) [UPG2162T5N-A](#) [CG2415M6-C2](#) [AS222-92LF](#) [SW-314-PIN](#) [UPG2162T5N-E2-A](#) [BGS18GA14E6327XTSA1](#) [MASWSS0204TR-3000](#) [MASWSS0201TR](#) [MASWSS0181TR-3000](#) [MASW-007588-TR3000](#) [MASW-007075-000100](#) [MASW-004103-13655P](#) [MASW-003102-13590G](#) [MASWSS0202TR-3000](#) [MASW-008543-TR3000](#) [MA4SW310B-1](#)