

Steckzungen für ge- druckte Schaltungen

Masse im Steckbereich
DIN 46342 Teil 1

Languettes plates pour circuits imprimés

Dimensions zone d'emboîtement selon
DIN 46342 partie 1

Mounting tabs for printed circuitry

Dimensions in the tab sector
DIN 46342 part 1

Werkstoff:

BZ = Bronze
MS = Messing

Oberflächenbehandlung: Code

bl = blank (0)
ag = versilbert (1)
au = vergoldet (2)
sn = verzinkt (8)

Matière:

BZ = bronze
MS = laiton

Traitements de surface: Code

bl = brut (0)
ag = argenté (1)
au = doré (2)
sn = étamé (8)

Material:

BZ = bronze
MS = brass



Surface-plating: Code

bl = clean (0)
ag = silver-plated (1)
au = gold-plated (2)
sn = tin-plated (8)

Bestellbeispiel:
Exemple de commande:
Example of order:

378005.68 lose / en vrac / in bulk
(3780/0.5 MS sn)






0378005.68 magaziniert / emmagasiné / wired
(03780/0.5 MS sn)

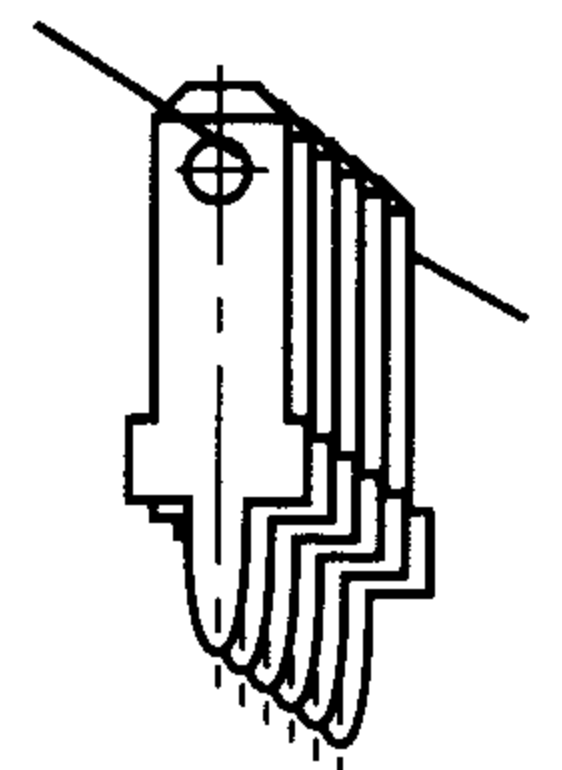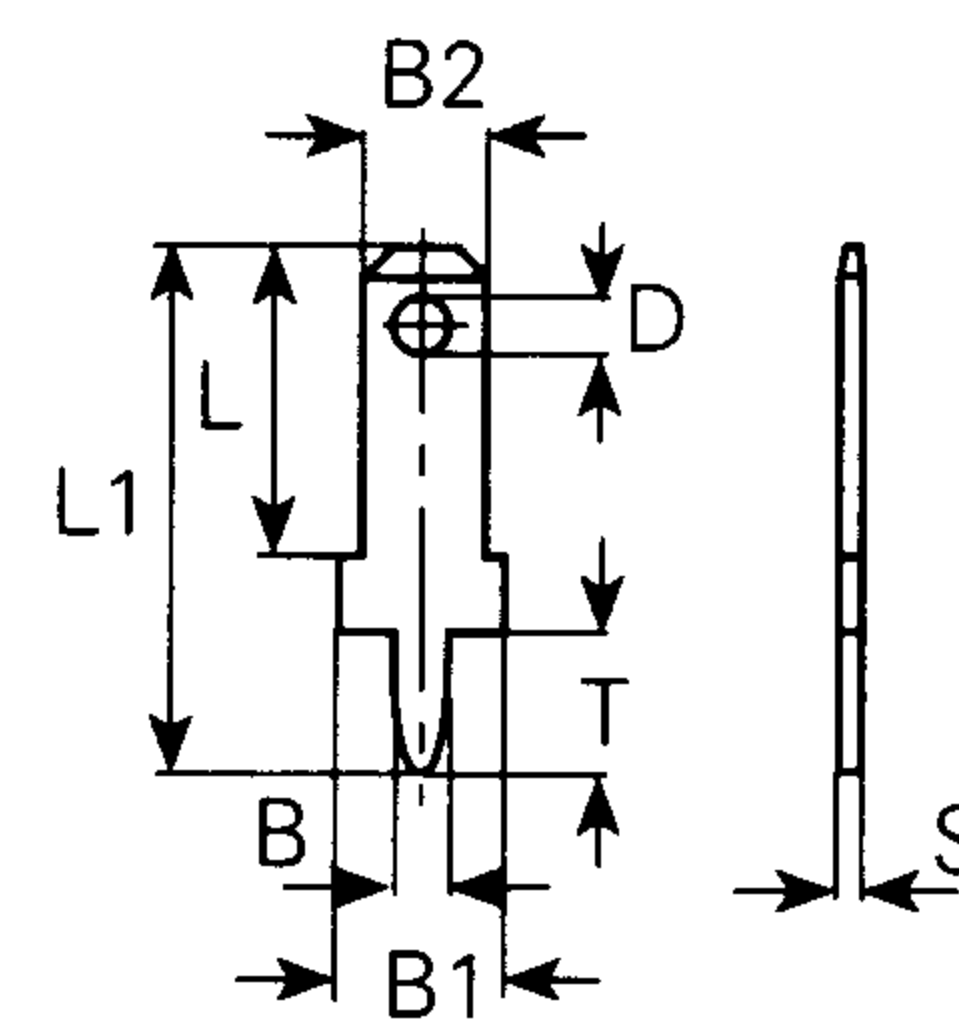






lose / en vrac / in bulk

magaziniert / emmagasiné / wired

2,8 mm

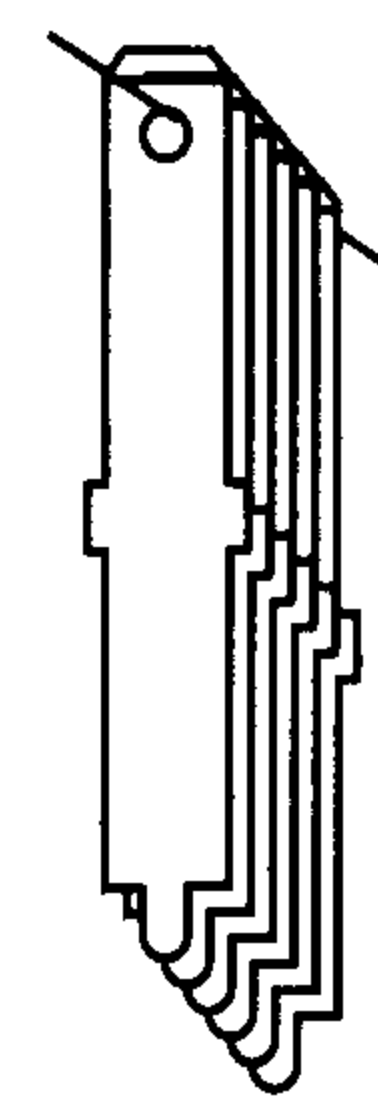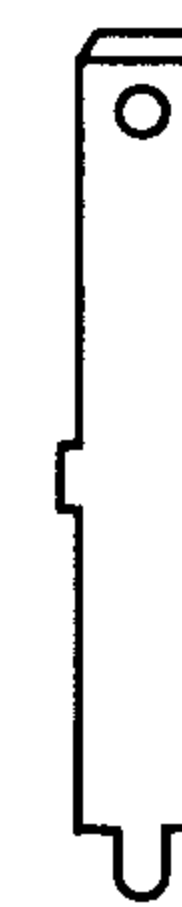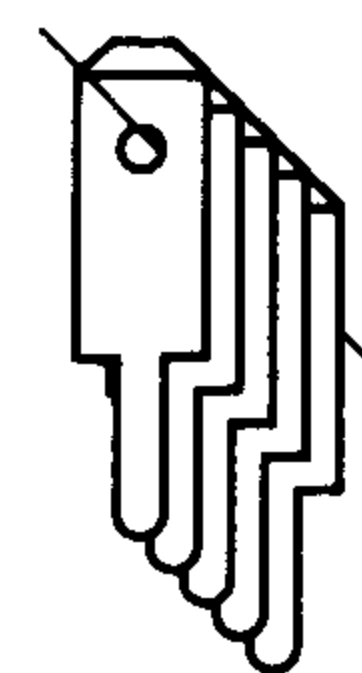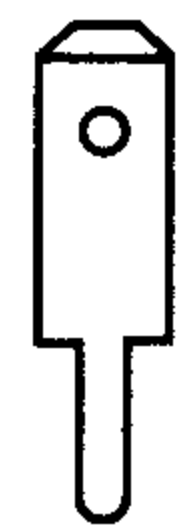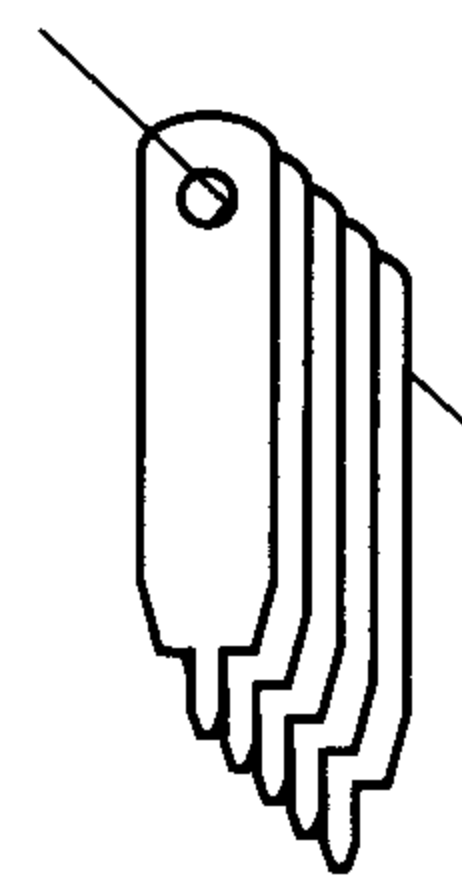

Artikel-Nr. Numéro d'article → Part-No.	3775W05.6() MS	03775W05.6() MS	378005.2() BZ 378005.6() MS	0378005.2() BZ 0378005.6() MS	3775K.6() MS	03775K.6() MS	3779T.6() MS
Print Bohrung → Trou Hole	Ø 0.8/0.9 T 1.8 L 11.3 L1 13.1 B1 2.8 B2 2.8 D 1.0 B 0.8 S 0.5	Ø 0.8/0.9 T 1.8 L 11.3 L1 13.1 B1 2.8 B2 2.8 D 1.0 B 0.8 S 0.5	Ø 0.9 T 3.8 L 6.7 L1 10.5 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.5	Ø 0.9 T 3.8 L 6.7 L1 10.5 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.5	Ø 1.0 T 1.3 L 7.8 L1 18.8 B1 3.6 B2 2.8 D 1.3 B 1.0 S 0.5	Ø 1.0 T 1.3 L 7.8 L1 18.8 B1 3.6 B2 2.8 D 1.3 B 1.0 S 0.5	Ø 1.0 T 2.8 L 6.7 L1 9.5 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.8
Stand.-Packg.	2000	4800	2000	4800	2000	4800	2000
Werkzeuge Outils / Tools	1035/17	1041W05	1035/13	104105	1035/17	1048K	1035/16

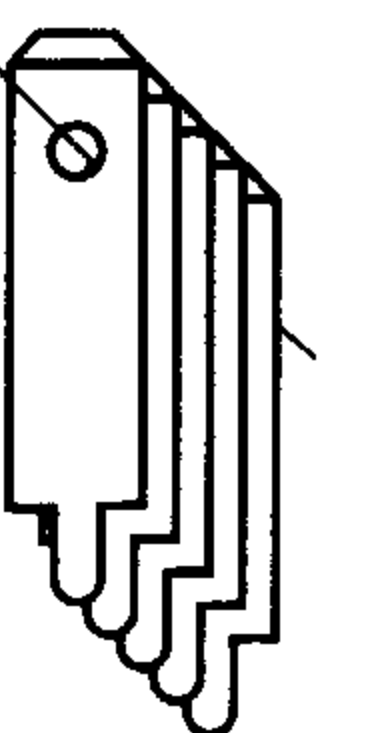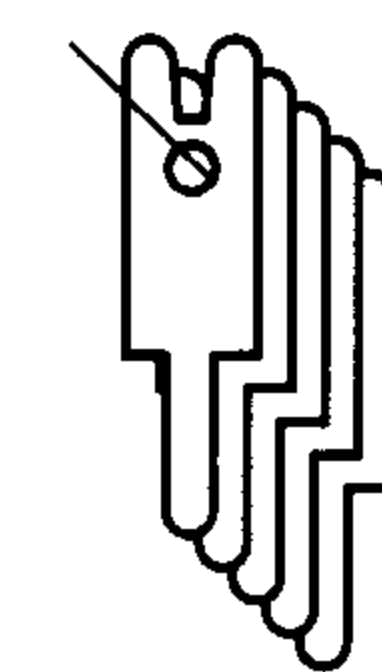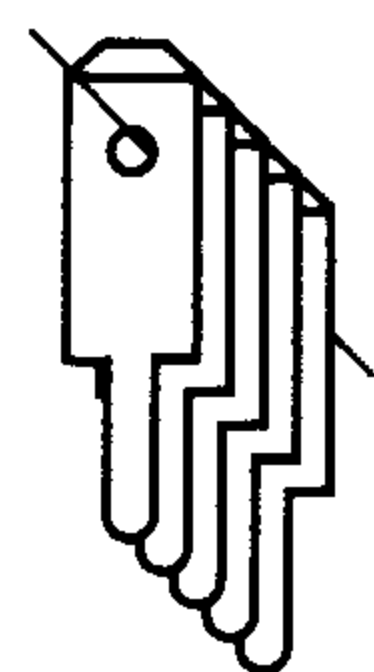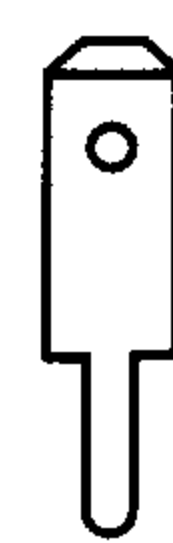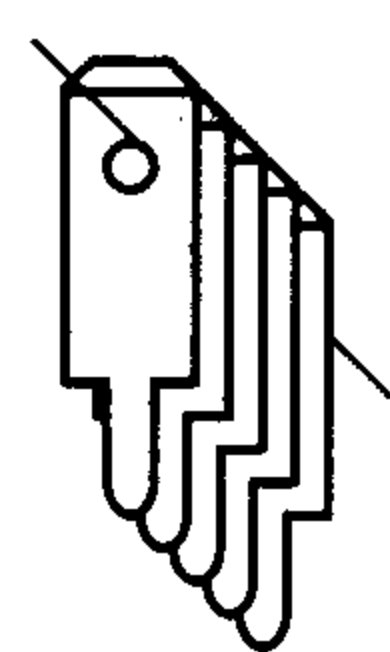

Artikel-Nr. Numéro d'article → Part-No.	03779T.6() MS	378008.2() BZ 378008.6() MS	0378008.2() BZ 0378008.6() MS	3780B08.6() MS	03780B08.6() MS	3779S.6() MS	03779S.6() MS
Print Bohrung → Trou Hole	Ø 1.0 T 2.8 L 6.7 L1 9.5 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.8	Ø 1.0 T 3.8 L 6.7 L1 10.5 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.8	Ø 1.0 T 3.8 L 6.7 L1 10.5 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.8	Ø 1.0 T 3.8 L 6.7 L1 10.5 B1 2.8 B2 2.8 D 1.5 B 1.0 S 0.8	Ø 1.0 T 3.8 L 6.7 L1 10.5 B1 2.8 B2 2.8 D 1.5 B 1.0 S 0.8	Ø 1.1 T 2.0 L 10.0 L1 12.0 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.8	Ø 1.1 T 2.0 L 10.0 L1 12.0 B1 2.8 B2 2.8 D 1.4 B 1.0 S 0.8
Stand.-Packg.	5000	2000	5000	2000	5000	2000	5000
Werkzeuge Outils / Tools	104108	1035/16	104108	1035/16	104108	1035/16	104708

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [jst manufacturer](#):

Other Similar products are found below :

[B02B-JWPF-SK-R](#) [B3B-ZR](#) [B4B-ZR](#) [B5B-XH-A](#) [B5B-ZR](#) [B5PS-VH](#) [B6B-ZR-SM4-TF](#) [B6P-VH](#) [B7B-XH-A](#) [B8B-XH-A](#) [B8B-ZR](#) [B8P-VH](#) [BM02B-SRSS-TB](#) [BM06B-SRSS-TB](#) [BM10B-SRSS-TB](#) [B04P-NV](#) [B2B-PH-K-S](#) [B2B-PH-SM4-TB](#) [B2B-ZR-SM4-TF](#) [B34B-PHDSS-B\(LF\)\(SN\)](#) [B3B-ZR-SM4-TF](#) [B5B-ZR-SM4-TF](#) [B6B-XH-A](#) [B6PS-VH](#) [B7B-ZR-SM4-TF](#) [B7PS-VH](#) [B8B-ZR-SM4-TF](#) [B8PS-VH](#) [BM04B-SRSS-TB](#) [BM05B-SRSS-TB](#) [IDH-KR-12](#) [WC-ZE2426](#) [WC-691](#) [B6PS-VH\(LF\)\(SN\)](#) [FNGS12-6](#) [TWE0.5-8](#) [WC-GVH2630](#) [WC-PUD2](#) [S10B-PH-SM4-TB\(LF\)\(SN\)](#) [B2B-EH-A-TW \(LF\)\(SN\)](#) [B4B-EH-A-TW \(LF\)\(SN\)](#) [B4B-XH-TW \(LF\)\(SN\)](#) [B6B-EH-A-TW \(LF\)\(SN\)](#) [B6P-VH-TW \(LF\)\(SN\)](#) [B8B-XH-TW \(LF\)\(SN\)](#) [B9B-XH-A](#) [BM02B-GHS-TBT](#) [BM03B-GHS-TBT](#) [BM04B-GHS-TBT](#) [BM06B-GHS-TBT](#)