

# Steckzungen für gedruckte Schaltungen

Masse im Steckbereich  
DIN 46342 Teil 1

# Languettes plates pour circuits imprimés

Dimensions zone d'emboîtement selon  
DIN 46342 partie 1

# Mounting tabs for printed circuitry

Dimensions in the tab sector  
DIN 46342 part 1

Werkstoff:

BZ = Bronze  
MS = Messing  
NS = Neusilber

Matière:

BZ = bronze  
MS = laiton  
NS = maillechort

Material:

BZ = bronze  
MS = brass  
NS = german silver

Oberflächenbehandlung: Code

bl = blank (0)  
ag = versilbert (1)  
au = vergoldet (2)  
sn = verzinkt (8)

Traitements de surface: Code

bl = brut (0)  
ag = argenté (1)  
au = doré (2)  
sn = étamé (8)

Surface-plating: Code



bl = clean (0)  
ag = silver-plated (1)  
au = gold-plated (2)  
sn = tin-plated (8)

**Bestellbeispiel:**  
**Exemple de commande:**  
**Example of order:**

**3866P.68** lose / en vrac / in bulk  
(3866P MS sn)

magaziniert / emmagasiné / wired








**3866P.68**  
(03866P MS sn)

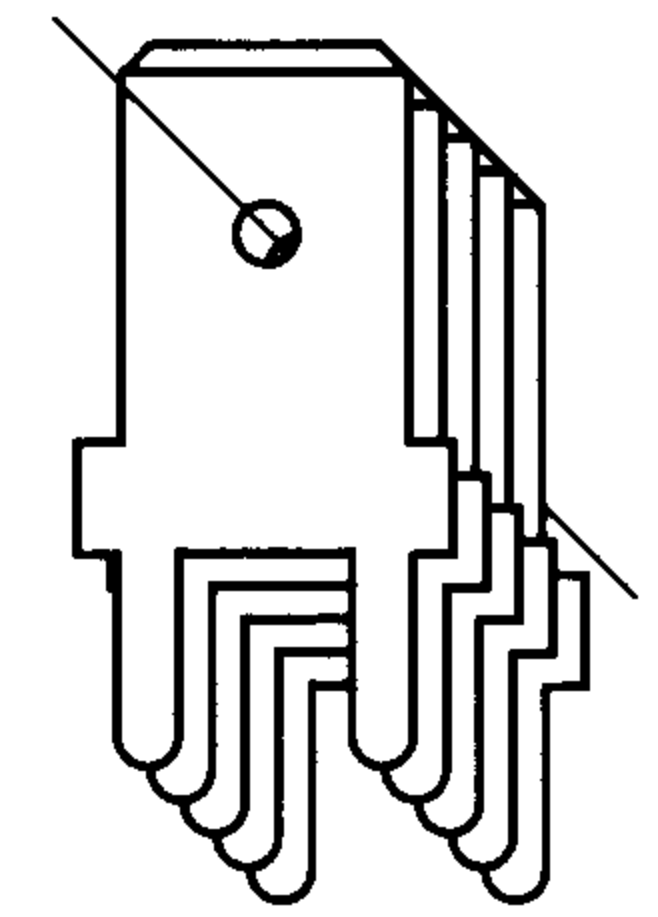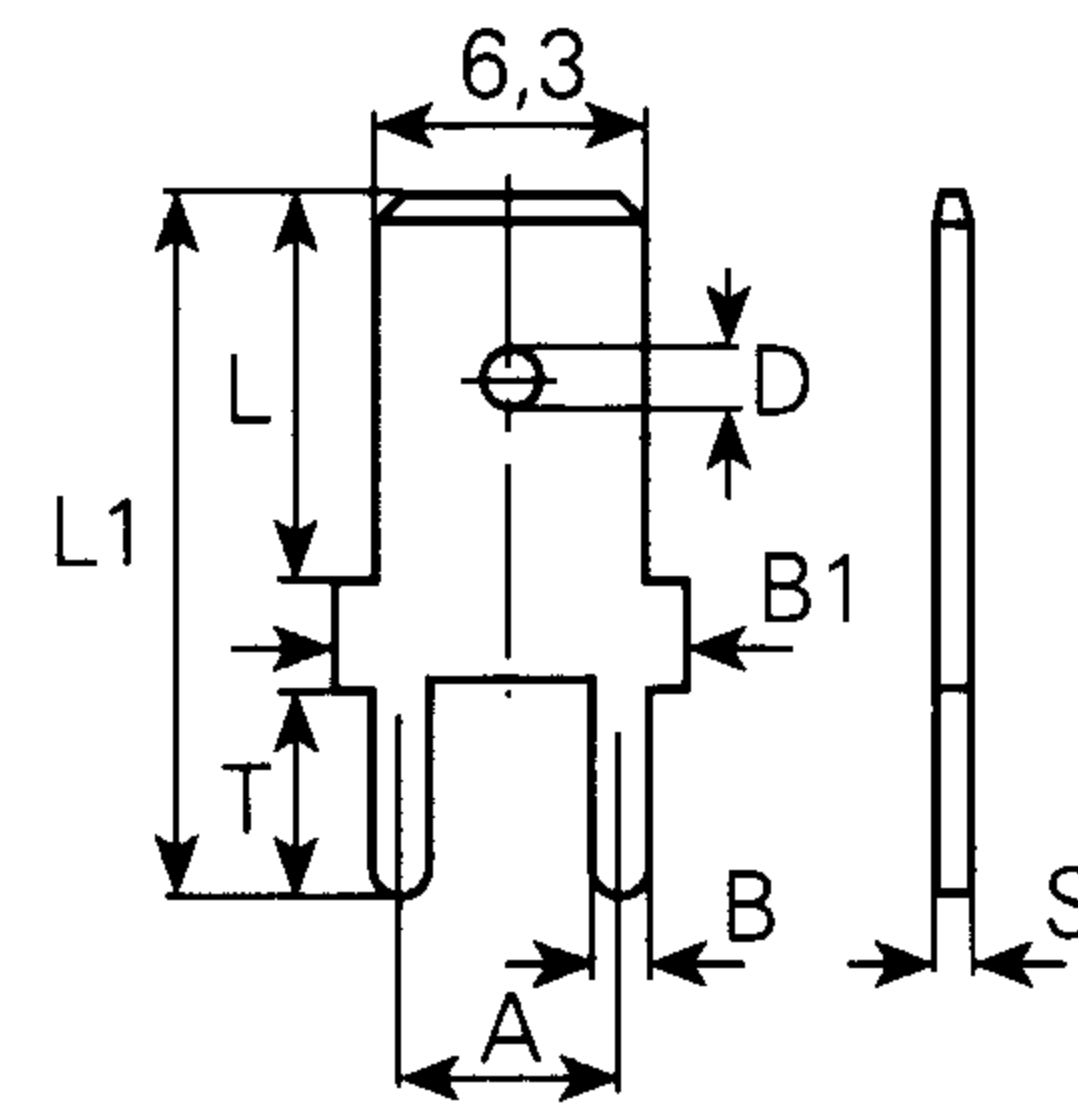







lose / en vrac / in bulk

magaziniert / emmagasiné / wired

**6,3 mm**

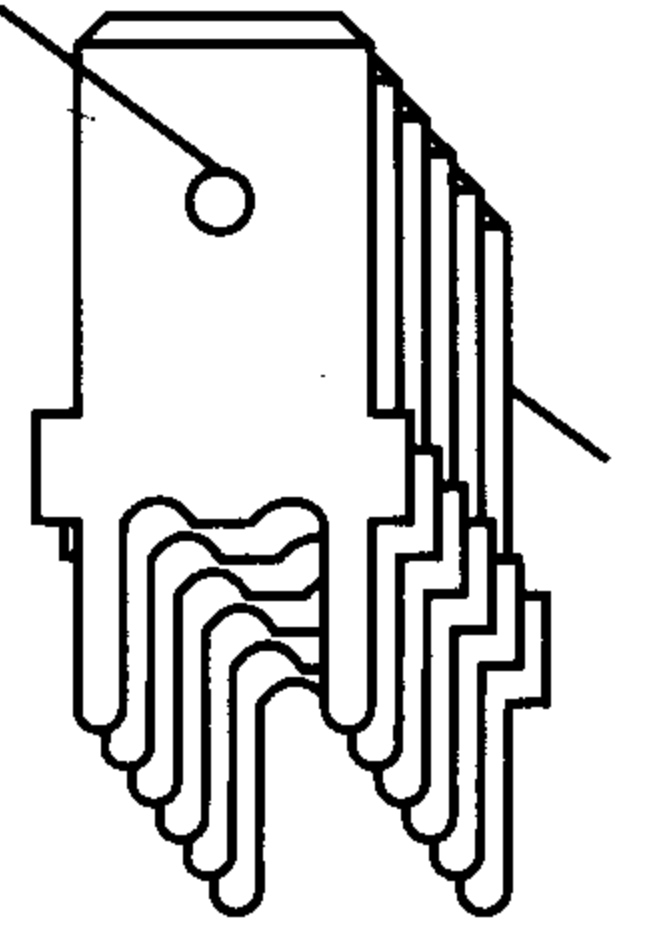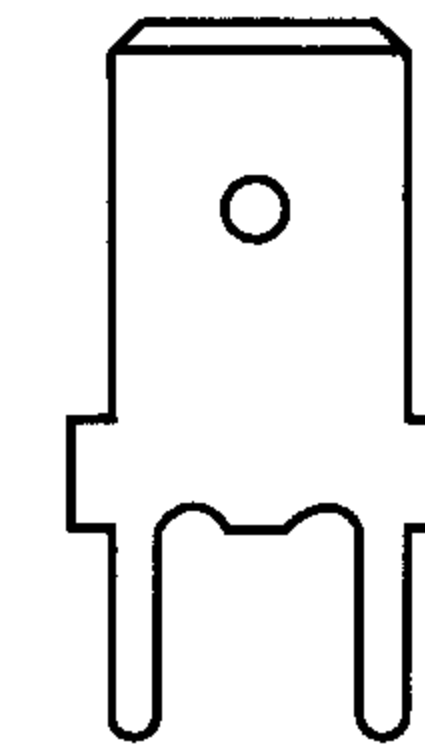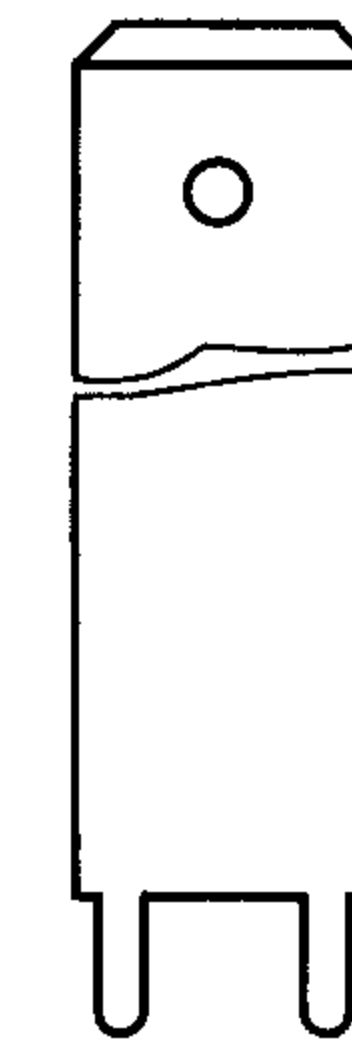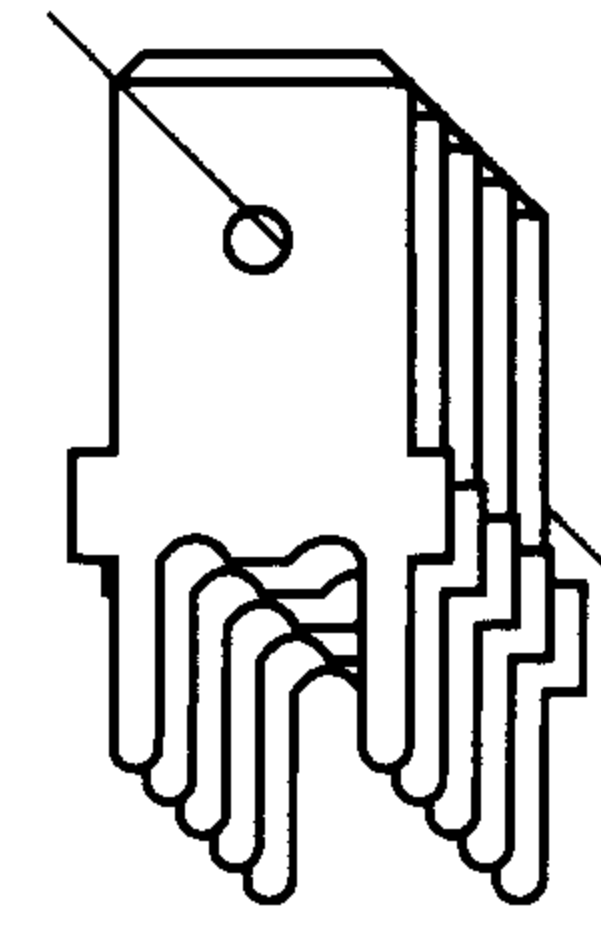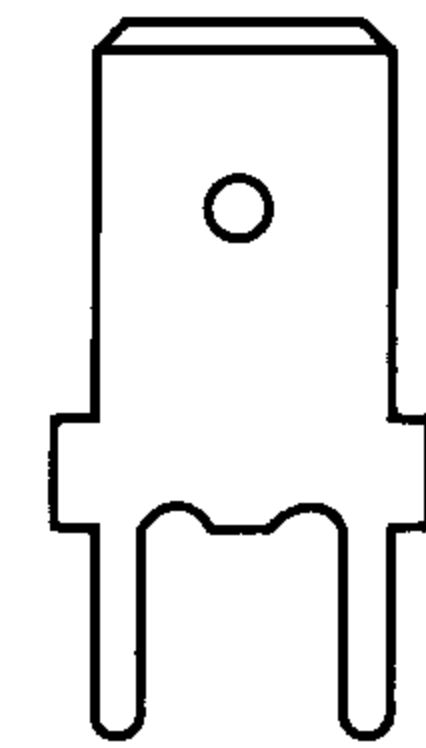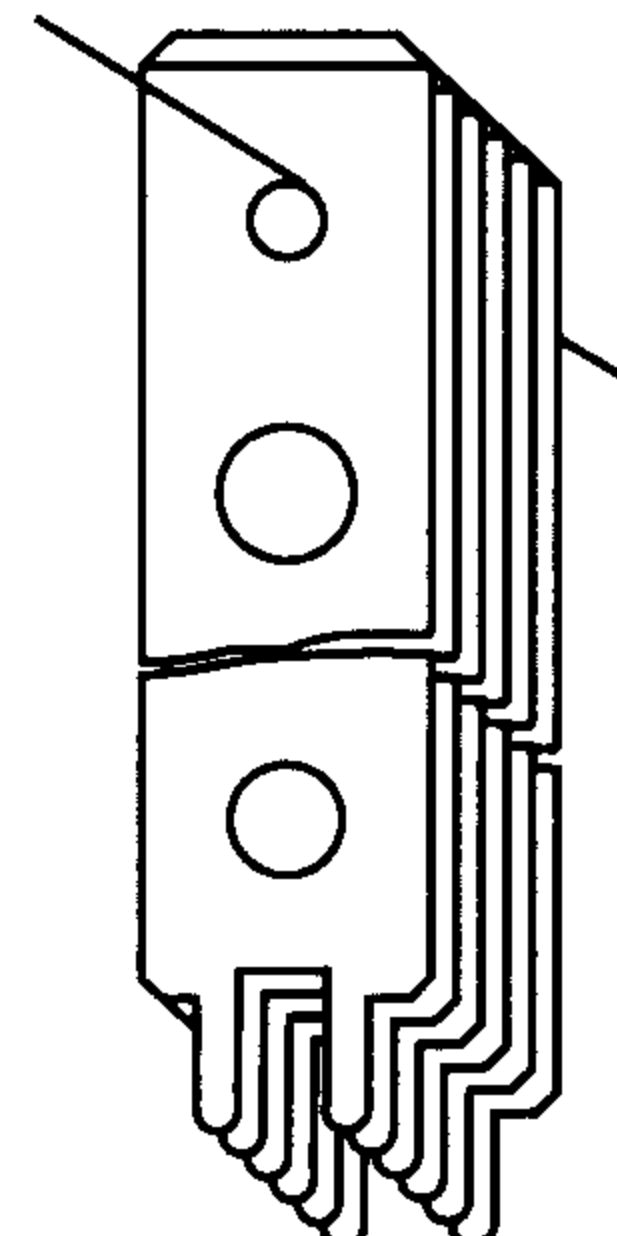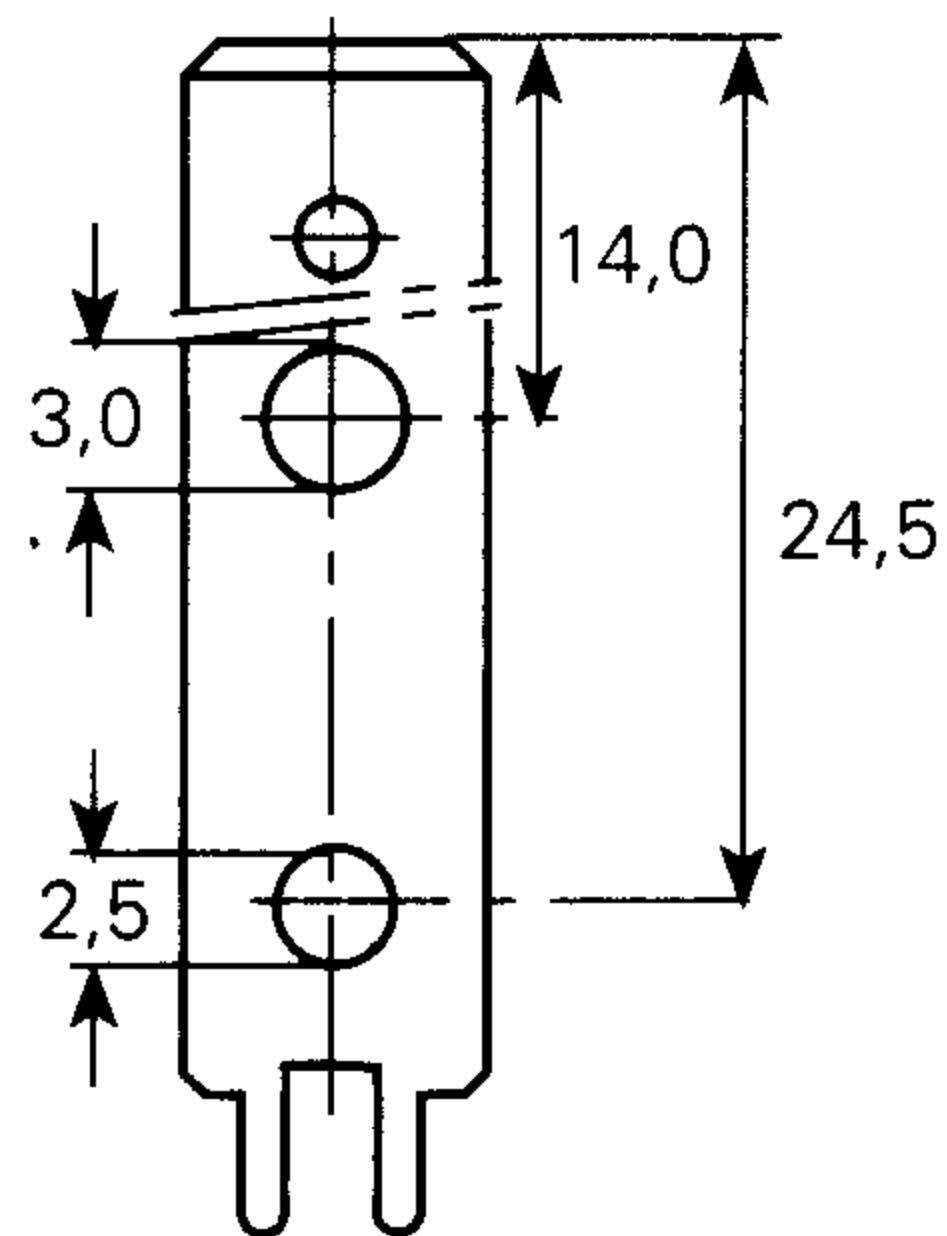

Artikel-Nr. Numéro d'article Part-No.	3866P.6( ) MS	03866P.6( ) MS	3866U.6( ) MS	03866U.6( ) MS	3866R.6( ) MS	3866Z.6( ) MS	03866Z.6( ) MS
Print Bohrung → Trou Hole	Ø 0.9/1.0 T 3.0 L - L1 31.5 B1 6.3 A 2.5 D 1.65 B 0.8 S 0.8	Ø 0.9/1.0 T 3.0 L - L1 31.5 B1 6.3 A 2.5 D 1.65 B 0.8 S 0.8	Ø 1.0/1.1 T 4.5 L 8.5 L1 15.3 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.4	Ø 1.0/1.1 T 4.5 L 8.5 L1 15.3 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.4	Ø 1.1 T 3.0 L - L1 35.5 B1 6.3 A 5.0 D 1.8 B 1.0 S 0.8	Ø 1.1 T 3.5 L 8.5 L1 14.3 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.8	Ø 1.1 T 3.5 L 8.5 L1 14.3 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.8
Stand.-Packg.	1000	2000	2000	3750	1000	1000	2000
Werkzeuge Outils / Tools	<b>1037/38</b>	<b>1046P</b>	<b>1037/40</b>	<b>1046U</b>	<b>1037/38</b>	<b>1037/23</b>	<b>1046</b>

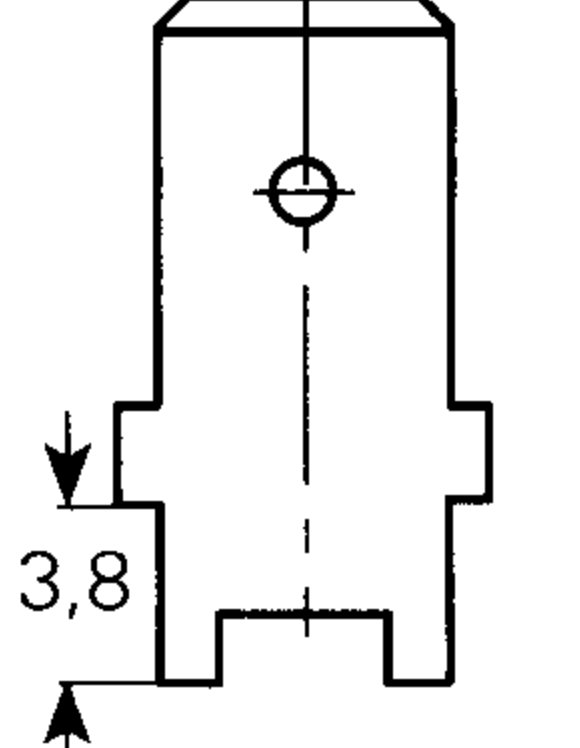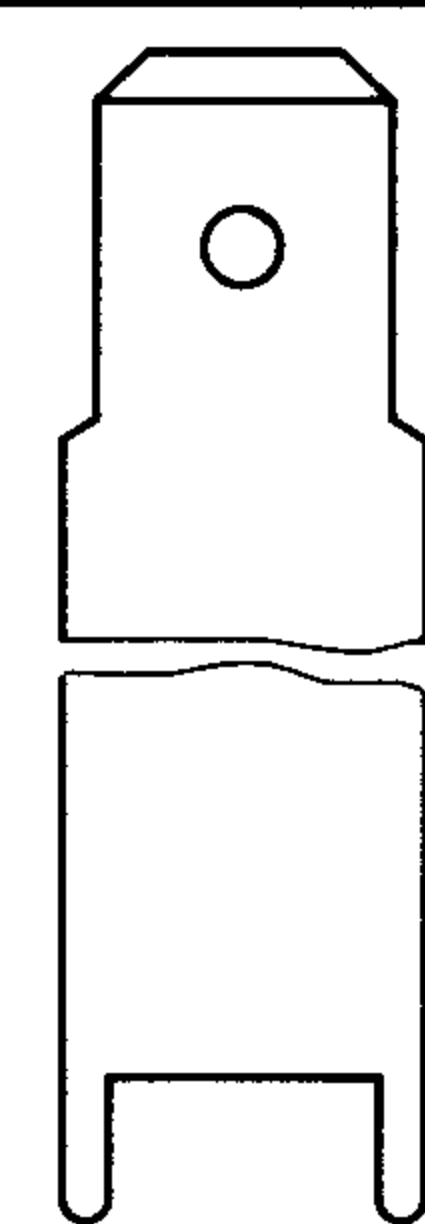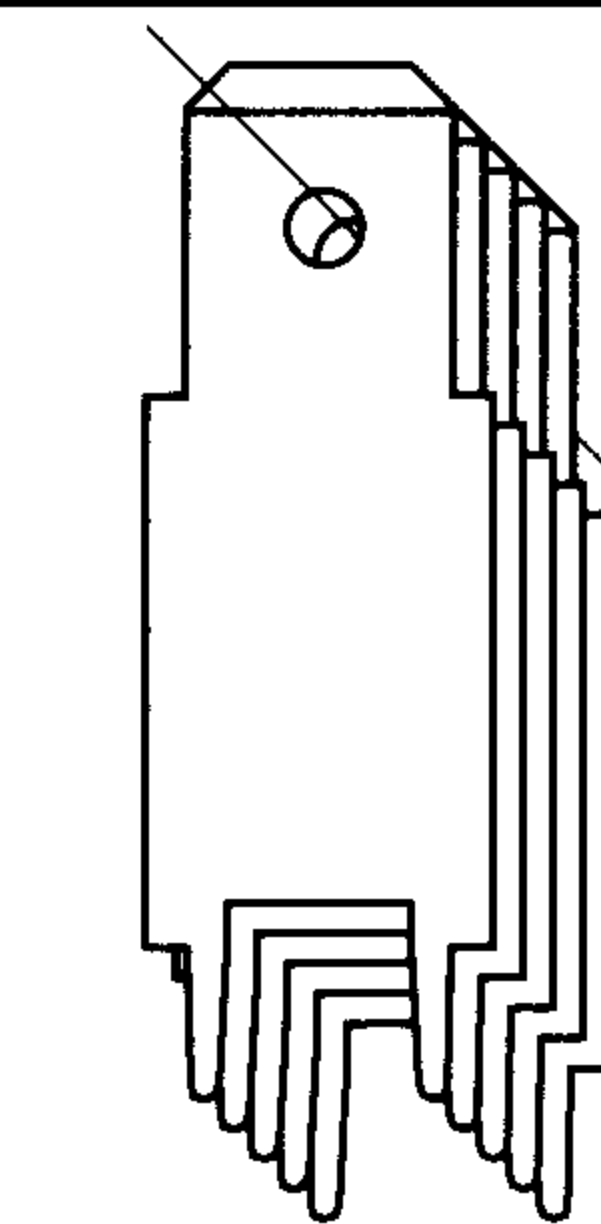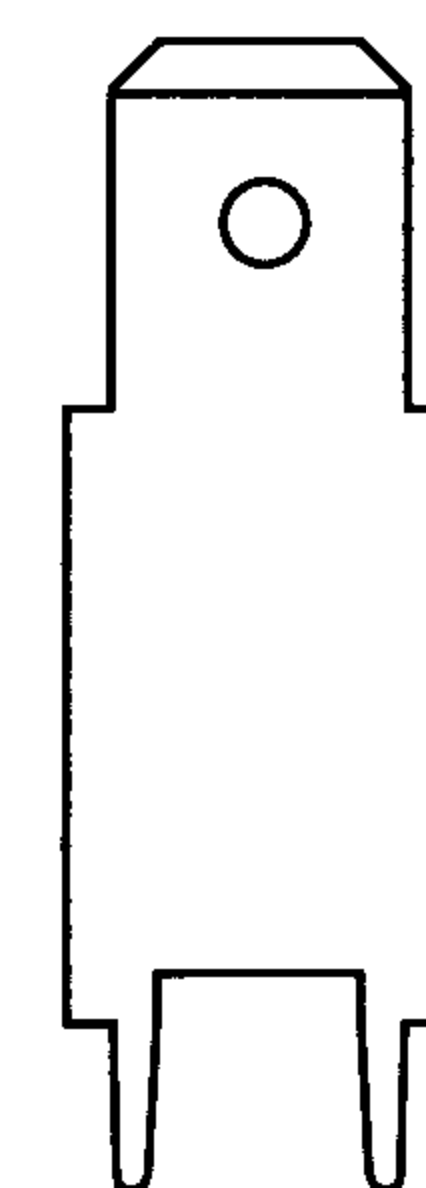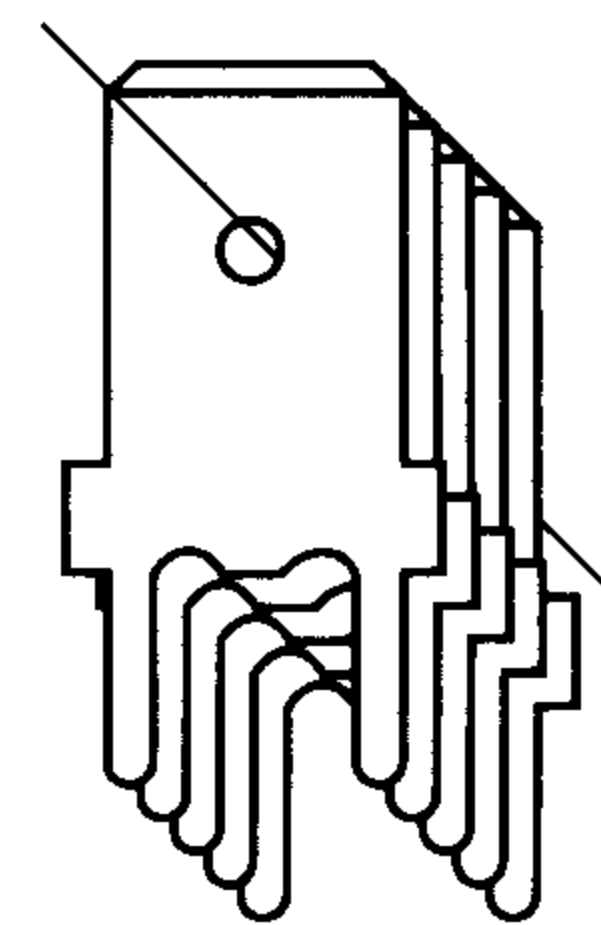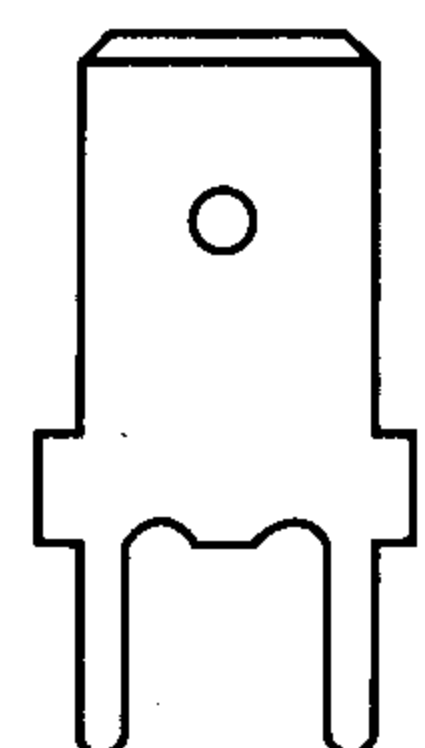

Artikel-Nr. Numéro d'article Part-No.	3866G.6( ) MS	03866G.6( ) MS	3865T.7( ) NS	03865T.7( ) NS	3865F.7( ) NS	3865S.7( ) NS	3866T.6( ) MS
Print Bohrung → Trou Hole	Ø 1.1 T 4.5 L 8.5 L1 15.3 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.8	Ø 1.1 T 4.5 L 8.5 L1 15.3 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.8	Ø 1.1/1.2 T 3.6 L 8.0 L1 24.8 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.8	Ø 1.1/1.2 T 3.6 L 8.0 L1 24.8 B1 8.0 A 5.0 D 1.65 B 1.0 S 0.8	Ø 1.2 T 3.0 L 8.0 L1 38.2 B1 7.5 A 6.5 D 1.7x3.9 B 1.0 S 0.8	Ø 1.2 T 3.0 L 8.0 L1 38.2 B1 7.5 A 6.5 D 1.7 B 1.0 S 0.8	Ø 1.3 T 1.5 L 8.5 L1 14.4 B1 8.0 A 5.0 D 1.65 B 1.3 S 0.8
Stand.-Packg.	1000	2000	1000	2000	1000	1000	1000
Werkzeuge Outils / Tools	<b>1037/23</b>	<b>1046</b>	<b>1037/23</b>	<b>1046T</b>	<b>1037/23</b>	<b>1037/23</b>	<b>1037/23</b>



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [jst manufacturer](#):*

Other Similar products are found below :

[B02B-JWPF-SK-R](#) [B3B-ZR](#) [B4B-ZR](#) [B5B-XH-A](#) [B5B-ZR](#) [B5PS-VH](#) [B6B-ZR-SM4-TF](#) [B6P-VH](#) [B7B-XH-A](#) [B8B-XH-A](#) [B8B-ZR](#) [B8P-VH](#) [BM02B-SRSS-TB](#) [BM06B-SRSS-TB](#) [BM10B-SRSS-TB](#) [B04P-NV](#) [B2B-PH-K-S](#) [B2B-PH-SM4-TB](#) [B2B-ZR-SM4-TF](#) [B34B-PHDSS-B\(LF\)\(SN\)](#) [B3B-ZR-SM4-TF](#) [B5B-ZR-SM4-TF](#) [B6B-XH-A](#) [B6PS-VH](#) [B7B-ZR-SM4-TF](#) [B7PS-VH](#) [B8B-ZR-SM4-TF](#) [B8PS-VH](#) [BM04B-SRSS-TB](#) [BM05B-SRSS-TB](#) [IDH-KR-12](#) [WC-ZE2426](#) [WC-691](#) [B6PS-VH\(LF\)\(SN\)](#) [FNGS12-6](#) [TWE0.5-8](#) [WC-GVH2630](#) [WC-PUD2](#) [S10B-PH-SM4-TB\(LF\)\(SN\)](#) [B2B-EH-A-TW \(LF\)\(SN\)](#) [B4B-EH-A-TW \(LF\)\(SN\)](#) [B4B-XH-TW \(LF\)\(SN\)](#) [B6B-EH-A-TW \(LF\)\(SN\)](#) [B6P-VH-TW \(LF\)\(SN\)](#) [B8B-XH-TW \(LF\)\(SN\)](#) [B9B-XH-A](#) [BM02B-GHS-TBT](#) [BM03B-GHS-TBT](#) [BM04B-GHS-TBT](#) [BM06B-GHS-TBT](#)