


Type: **T0-2-8230/E**
 Article No.: **088685**

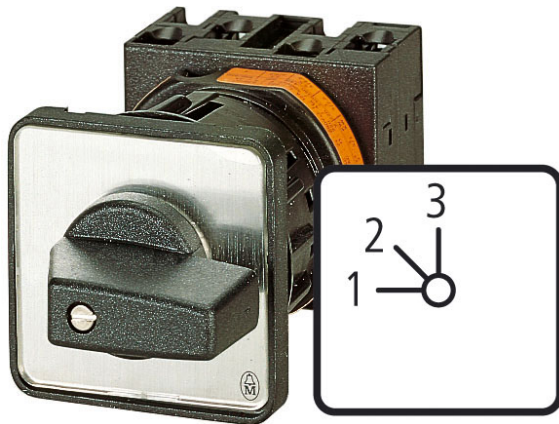

With black thumb-grip and grey front plate


One contact closed per step

(without overlap)

Ordering information

| | | | |
|-------------|--|--|--------------------------|
| Design | | | Flush mounting |
| Description | | | Without 0 (Off) position |
| Pole | | | 1 |

Contact sequence



Front plate no.



General

| | | | |
|-----------|--|--|---|
| Standards | | | IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnectors to IEC/EN 60947-3 Load-break switches to |
|-----------|--|--|---|

| | | | |
|--|--------------|---------------|--|
| | | | IEC/EN 60947–3 |
| Lifespan, mechanical | Operations | $\times 10^6$ | 1 |
| Maximum operating frequency | Operations/h | | 3000 |
| Climatic proofing | | | Damp heat, constant, to IEC 60068–2–78; Damp heat, cyclical, to IEC 60068–2–30 |
| Ambient temperature | | | |
| Open | | °C | –25/50 |
| Enclosed | | °C | –25/40 |
| Mounting position | | | As required |
| Documentation | | | Main catalogue HPL |
| Mechanical shock resistance (shock duration 20 ms) | | g | > 15 |

Contacts

| | | | |
|--|-----------|--------------|----------------------|
| Rated operational voltage | U_e | V AC | 690 |
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Overtoltage category/pollution degree | | | III/3 |
| Rated uninterrupted current | | | |
| open | I_u | A | 20 |
| Enclosed | I_u | A | 20 |
| Load-carrying capacity in intermittent operation, Class 12 | | | |
| AB 25 % DF | | $\times I_e$ | 2 |
| AB 40 % DF | | $\times I_e$ | 1,6 |
| AB 60 % DF | | $\times I_e$ | 1,3 |
| Short-circuit rating | | | |
| Fuse | | A gG/gL | 20 |
| Rated short-time withstand current (1 s current) | I_{cw} | A_{rms} | 320 |
| Safe isolation to VDE 0106 Part 101 and Part 101/A1 | | | |
| between the contacts | | V AC | 440 |
| Switching angles | | ° | 90 60 45 30 |
| Contact units | | | 11 |
| Double-break contacts | | | max. 22 |
| Current heat loss per contact at I_e | | W | 0,6 |

Terminal capacities

| | | | |
|---|-------|-----------------|--------------------------------------|
| Solid or stranded | | mm ² | 1 × (1 – 2.5) 2 × (1 – 2.5) |
| Flexible with ferrule to DIN 46228 | | mm ² | 1 × (0.75 – 1.5) 2 × (0.75 – 1.5) |
| Terminal screw | | | M3.5 |
| Tightening torque | | Nm | 1 |
| Switching capacity | | | |
| AC | | | |
| Rated making capacity $\cos \phi = 0.35$ | | A | 130 |
| Rated breaking capacity, motor load switch $\cos \phi = 0.35$ | | | |
| 230 V | | A | 100 |
| 400 V | | A | 110 |
| 500 V | | A | 80 |
| 690 V | | A | 60 |
| Rated operational current 440 V load-break switch AC-21A | I_e | A | 20 |
| AC-3 motor load switch motor rating | | | |
| 230 V | P | kW | 3 |
| 230 V Star-delta | P | kW | 4 |
| 400 V | P | kW | 4 |
| 400 V Star-delta | P | kW | 5,5 |
| 500 V | P | kW | 5,5 |
| 500 V Star-delta | P | kW | 7,5 |
| 690 V | P | kW | 4 |
| 690 V Star-delta | P | kW | 5,5 |
| AC-23A Motor load switches (main switches maintenance switches) | | | |
| 230 V | P | kW | 3,5 |
| 400 V | P | kW | 11 |
| 500 V | P | kW | 7,5 |
| Rated operational current control switch AC-15 | | | |
| 230 V | I_e | A | 6 |
| 400 V | I_e | A | 4 |
| 500 V | I_e | A | 2 |
| DC | | | |
| DC-1, Load-break switches L/R = 1 ms | | | |


| | | | |
|---|-------------------|----------|--|
| Rated operational current | I_e | A | 10 |
| Voltage per contact pair in series | | V | 60 |
| DC-21A | | | |
| Rated operational current 240 V | I_e | A | 1 |
| 240 V Contacts | | Quantity | 1 |
| DC-23A, Motor load switches L/R = 15 ms | | | |
| 24 V | | | |
| Rated operational current | I_e | A | 10 |
| Contacts | | Quantity | 1 |
| 48 V | | | |
| Rated operational current | I_e | A | 10 |
| Contacts | | Quantity | 2 |
| 60 V | | | |
| Rated operational current | I_e | A | 10 |
| Contacts | | Quantity | 3 |
| 120 V | | | |
| Rated operational current | I_e | A | 5 |
| Contacts | | Quantity | 3 |
| 240 V | | | |
| Rated operational current | I_e | A | 5 |
| Contacts | | Quantity | 5 |
| DC-13, Control switches L/R = 50 ms | | | |
| Rated operational current | I_e | A | 10 |
| Voltage per contact pair in series | | V | 32 |
| Control circuit reliability at 24 V DC, 10 mA | Fault probability | H_F | $< 10^{-5}$, < 1 fault in 100000 operations |

Notes


| | | | |
|--|--|--|--|
| | | | <p>For mechanical shock resistance: T3.../I... >12g Applies to T0(3).../SVB: isolating characteristics to IEC/EN 60947 <i>U</i> for rated operational voltage up to 500 V AC Applies to rated uninterrupted current I_u of the contact: with T5-4-8344/I5 max. 95 A For terminal capacity solid, stranded and flexible: T0(3), (6), (8)...: Maximum of</p> |
|--|--|--|--|

| | | | |
|-------------------|--|--|---|
| | | | <p>2 cross-section sizes difference admissible between 2 conductors T5(B)-...: Maximum of 1 cross-section size difference admissible between 2 conductors For type T8-3-8342/... the following applies: switching angle = 90° and flat connection = 1 busbar 25 × 5 or 2 busbars 20 × 3</p> |
| Dimensions | | | |
| | | | not included |
| | | | Diameter of drilled hole Door |
| Explanation | | | <p>For utilisation category AC-4 (extreme load: 100 % inching, reversing or plugging) The blocked rotor current of the motor should not exceed the rated current of the switch for AC-21A to ensure a reasonable device lifespan.</p> |


Dimensions

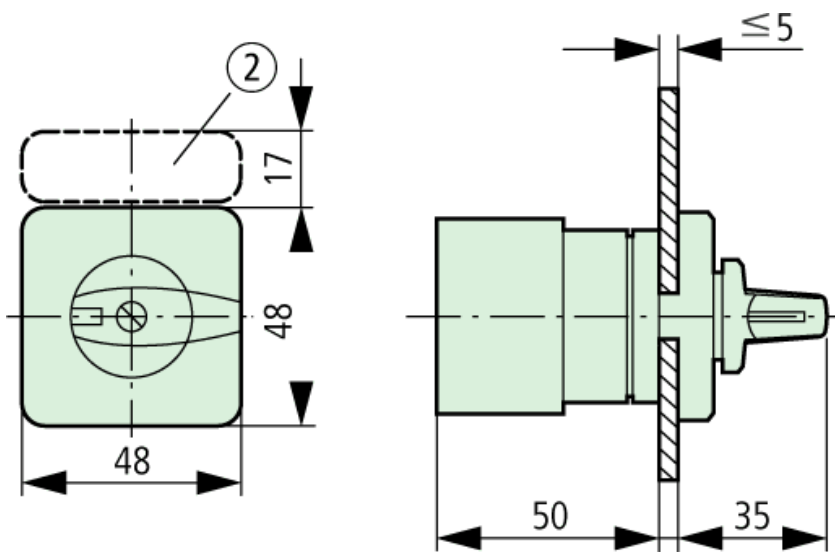


Dimensions

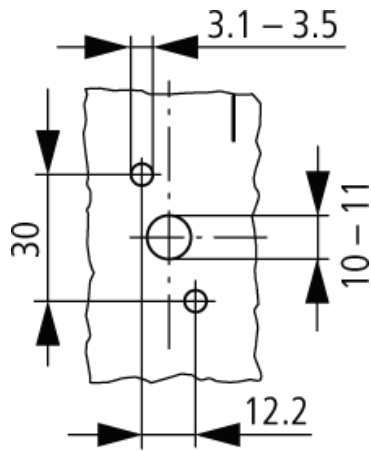

Dimensions

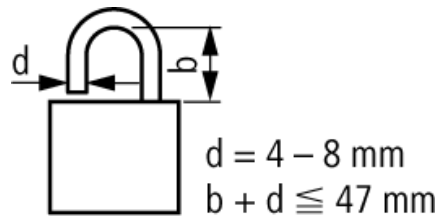

Characteristic curve

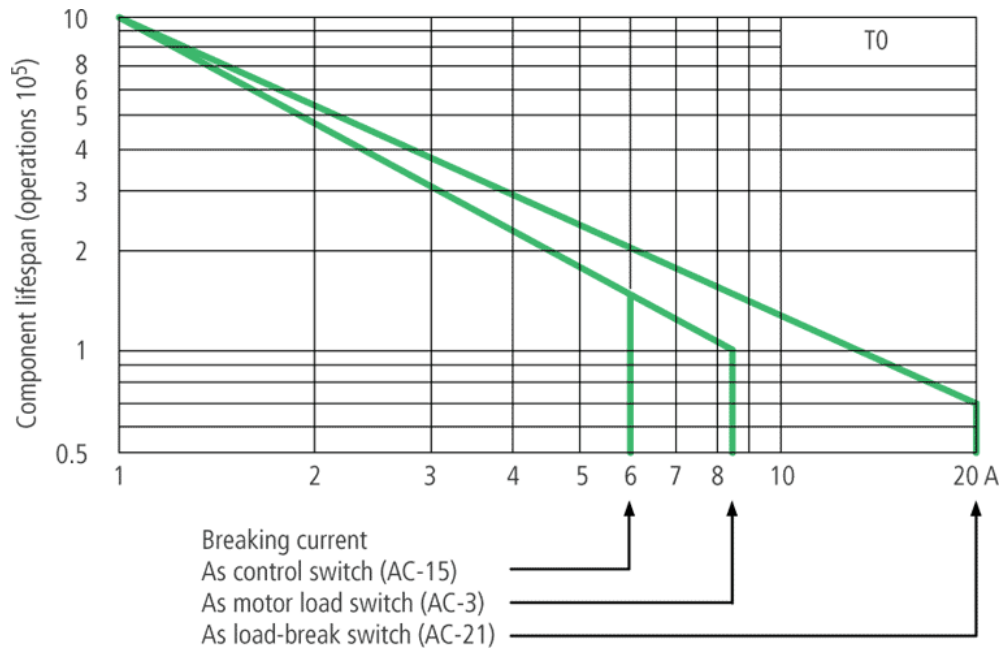

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
 E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
 Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [eaton](#) manufacturer:

Other Similar products are found below :

[BK1-S506-500-R](#) [BK1-S506-6-3-R](#) [BK1-S506-2-R](#) [BK-MDL-3-R](#) [MPI4040R4-1R5-R](#) [89096-015](#) [8946K153](#) [8961K155](#) [M22-DL-W-X0](#)
[M22-L-R/R](#) [M22S-ST-GB12](#) [630NHG3B](#) [63ET](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#) [6HD36](#) [6NZ01](#) [714125](#)
[MBO-2](#) [ESR5-NO-41-24VAC-DC](#) [7314K36](#) [F02A-1-1/2A](#) [F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-2AS](#) [F02A-3/4A](#) [F03A250V12A](#) [MCR-4](#)
[MDA-2-8/10-R](#) [MDA-30A](#) [MDA-V-1/16](#) [F60C500V10AS](#) [F60C500V15AS](#) [7563K84](#) [MDQ-3/16](#) [MDQ-7/10](#) [MDV-1-1/2](#) [MDV-3/8](#) [MDV-](#)
[4](#) [MDV-6/10](#) [FAZ-C2](#) [MIC-2](#) [MIC-30](#) [80910030](#) [FHL-18-W2-1](#) [8138K20W7V52](#) [8175K12L121C50](#)