

Autotransformer AIM 3,2/1,6



Advantages

- Low weight and small size (compared to isolating transformers)
- Integrated short circuit and overload protection
- Very high efficiency
- Very good moisture protection and low noise thanks to XtraDenseFill resin encapsulation (AIM 1.8/8 - AIM 5.0/2.5)
- Screw terminals under cover with strain relief

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Standards

Autotransformer
to: VDE 0570 Part 2-13, DIN EN 61558-2-13, EN 61558-2-13,
IEC 61558-2-13


Approvals



Autotransformer AIM 3,2/1,6

Type		AIM 3,2/1,6
Electrical data	Input	
	Rated input Voltage	115 Vac/220 Vac 230 Vac/240 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	115 Vac/220 Vac 230 Vac/240 Vac
	Rated output current	1.60 (PRI 115 / SEC 220, 230, 240);
		3.20 (PRI 115 / SEC 115);
		3.20 (PRI 220, 230, 240 / SEC 115, 220, 230, 240)
		6.70 W
	No-load loss (typ.)	6.70 W
Environment		
Ambient temperature max.	40 °C	
Safety and protection		
Type	Resin encapsulated transformer	
Class of Insulation System	A	
Protection index	IP 20	
Safety class	May be used in protection category I and II. When protection category I devices are equipped the protective conductor in the output must be connected with the lead-in protective conductor.	
Short circuit strength	non-inherently short-circuit proof	
Order numbers		
Order Number	AIM 3,2/1,6	

Type		AIM 3,2/1,6
Terminal and mounting	Terminals	Screw-type terminal
	Fixing method	Fixing holes in the terminal connection compartment
Measures and weights		
Weight		3.60 kg

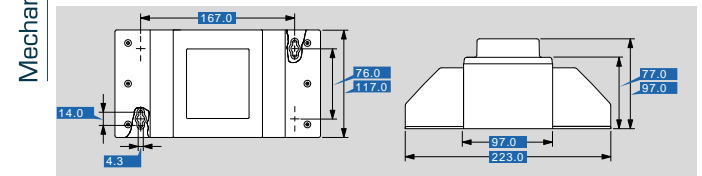

Subjects to change.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [block manufacturer](#):

Other Similar products are found below :

[PVSB 400/24-20](#) [RKD 120/2X24](#) [AIM5.0/2.5](#) [VB1.5/2/24](#) [STEU160/48](#) [TIM300](#) [AVB1.0/2/12](#) [FL4/18](#) [AVB2.3/2/12](#) [FL10/15](#) [FL6/24](#)
[FL24/6](#) [STEU320/23](#) [STEU160/23](#) [LR3 48-3/80](#) [LR3 48-5/16](#) [PC-0148-100-0](#) [PM-0112-040-0](#) [PM-0748-400-0](#) [PT 7.5/2/9](#) [FL14/6](#) [FL52/12](#)
[GNC24-2.5](#) [DCT24-1.5](#) [VB2.3/2/9](#) [VB 1.5/2/8](#) [SIM100](#) [RKD 100/2X15](#) [LR3 48-5/80](#) [LR3 48-5/90](#) [PM-0112-070-0](#) [PM-0148-020-0](#) [EB-](#)
[1824-010-0](#) [USTE1000/2X115](#) [FL14/18](#) [FL6/6](#) [VB 0.35/1/15](#) [PC-0324-400-0](#) [STEU250/23](#) [AIM3.2/1.6](#) [AVB3.2/2/12](#) [FL10/12](#) [FL14/15](#)
[FL8/6](#) [FL8/9](#) [LR3 48-3/90](#) [PC-0112-150-0](#) [EB-2724-100-0](#) [PVAF 24/3,2AH](#) [PT 4.5/2/12](#)