


## Star Point Relay SPR

- Full, symmetric star-point disconnection of an electric power steering motor
- Limiting continuous current 90A at 85°C
- Disconnection of high over-currents up to 200A in 12VDC and up to 60A in 36VDC power nets
- Contact arrangement fulfills 42VDC power net requirements
- Optimized dimensions: lhw (in mm) 32x18.5x18
- Resistant against high ambient temperature up to 125°C
- Contact resistance typ. <math><2\text{m}\Omega</math> per path for load current 20A after fritting

Typical applications  
All EPA/EPS applications.

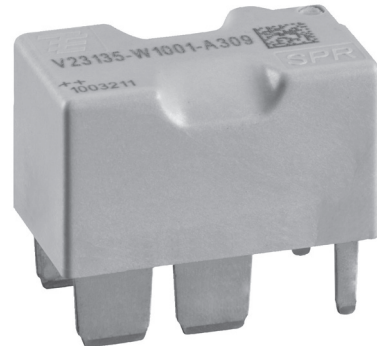

F135\_fw3b

### Contact Data

Contact arrangement	1 form 3, 3 NO
Rated voltage	12VDC
Max. switching voltage	depends on load parameters <sup>A)</sup>
Rated current	120A
Limiting continuous current <sup>1)</sup>	
23°C	120A
85°C	90A
125°C	60A
Limiting breaking current	200A <sup>2)</sup>
Breaking capacity max.	>10 ops. at 200A
Contact material	AgNi0.15
Contact style	triple
Min. recommended contact load <sup>5)</sup>	1A at 5VDC
Initial voltage drop, after fritting with 90A for 30s	<math><180\text{mV}</math> at 90A
Operate/release time max. <sup>3)</sup>	<math><20/10\text{ms}</math>
Bounce time max. <sup>3)</sup>	see footnote <sup>3)</sup>
Electrical endurance	
120A, dry switching <sup>4)</sup> at 23°C, 500ms on/off	>2x10 <sup>5</sup> ops.
Mechanical endurance	>10 <sup>6</sup> ops.

### Contact Data (continued)

- A) Please contact TE relay application engineer.
- 1) Max. terminal temperatures up to 180°C are allowed. Final temperatures depend on the leadframe layout.
  - 2) Without relay coil voltage: suppression component (see Application Note "Automotive Applications").
  - 3) Release and bounce time depend on component in parallel to the coil, please contact application support.
  - 4) Load only carried, not switched!
  - 5) See Application Note "Diagnostics of Relays"

### Coil Data


Coil voltage range	12VDC
Max. coil temperature	<math><180^\circ\text{C}</math>

### Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power W
001	12	6.4	1	150	0.96
002	10	5.2	0.8	97	1.03


All figures are given for coil without preenergization, at ambient temperature +23°C.

### Max. DC load breaking capacity

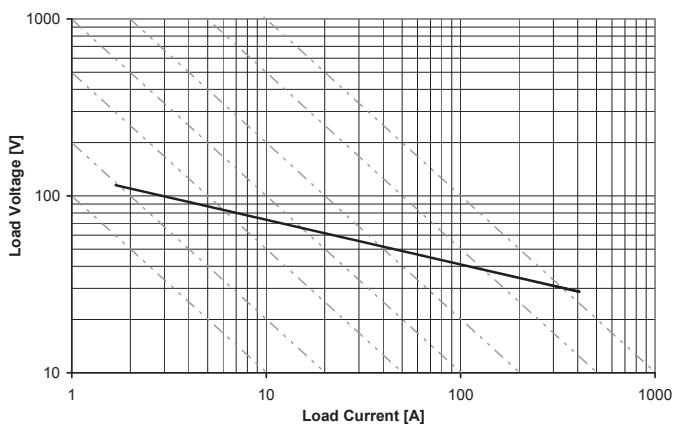

Load limit Curve II: valid for load path through pin 4 and pin 5, no coil suppression used.

### Coil operating range

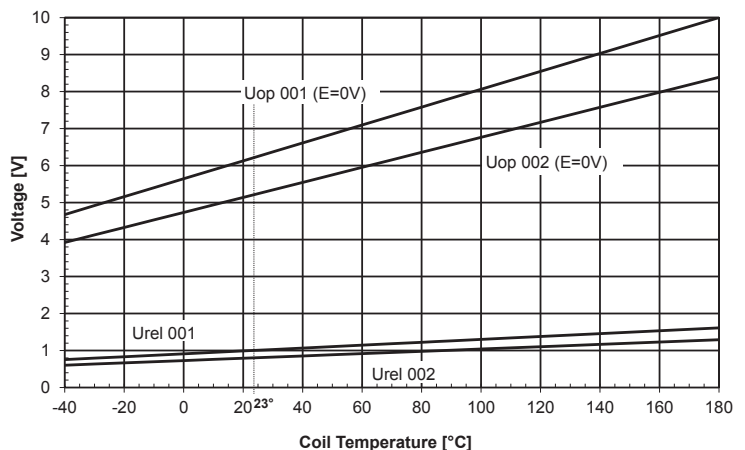

Does not take into account the temperature rise due to the contact current  
E = pre-energization

**Star Point Relay SPR** (Continued)

**Insulation Data**


Initial dielectric strength between contact and coil	500VAC <sub>rms</sub>
---	-----------------------

**Other Data**


EU RoHS/ELV compliance	compliant
Ambient temperature	-40°C to 125°C
Cold storage, IEC 60068-2-1	2000h; -40°C
Dry heat, IEC 60068-2-2	500h; +135°C
Temperature cycling (shock), IEC 60068-2-14, Na	500 cycles; -40/+135°C
Damp heat cyclic, IEC 60068-2-30, Db, Variant 1	83 cycles (2000h) 25°C/55°C/93%RH
Flowing mixed gas corrosion test, IEC 60068-2-60, Ke, method 1	10 days
Degree of protection	IP67 (IEC 60529), RT III (IEC 61810)
Vibration resistance (functional), IEC 60068-2-64 (random) energized	20 to 1000Hz >6g ms
IEC 60068-2-64 (random) not energized	20 to 1000Hz >4g ms
Shock resistance (functional), IEC 60068-2-27 (half sine) 6ms, energized	>40g
IEC 60068-2-27 (half sine) 6ms, not energized	>10g
Mounting	welding process on leadframe
Weight	approx. 30g (1.06oz)
Packaging unit	357 pcs.

**Terminal Assignment**

1 form 3, 3 NO

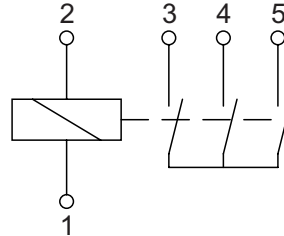


**Dimensions**

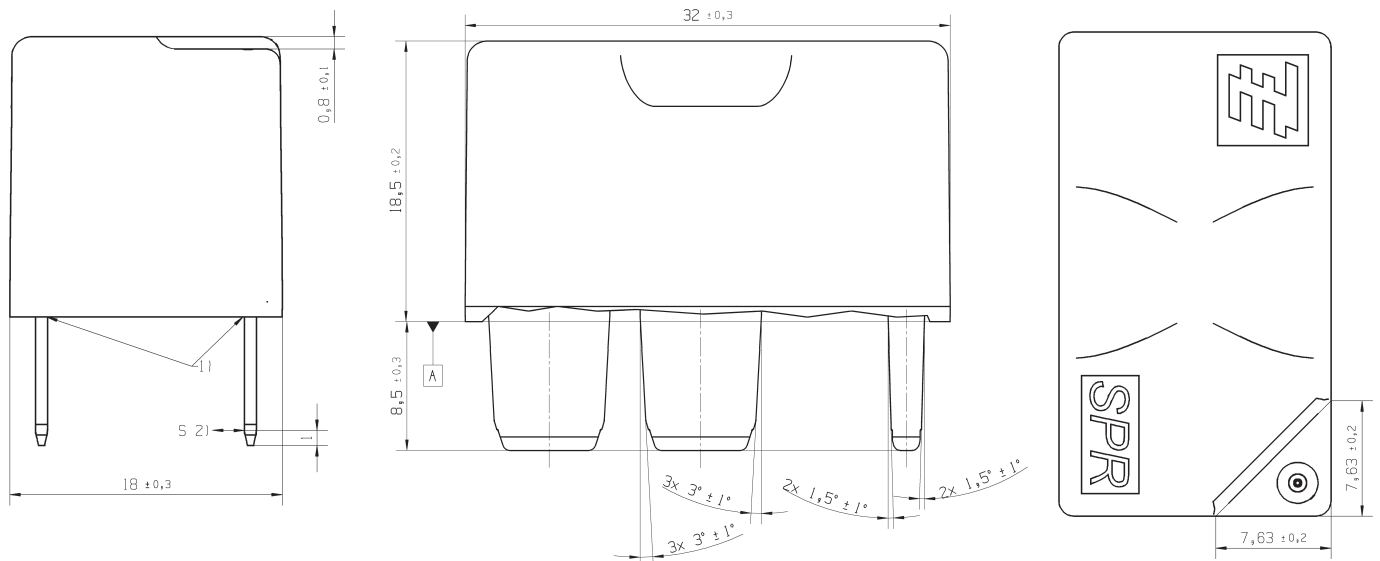

**View of the terminals**

Bottom view

- 1) Epoxy at terminals exceeds max. 0.9mm over coverage.
  - 2) Permanent acceptable deformation 0.25mm respectively 0.5mm temporarily.
- Maximum permissible thermal load of the terminals during the resistance welding process depends on leadframe design.

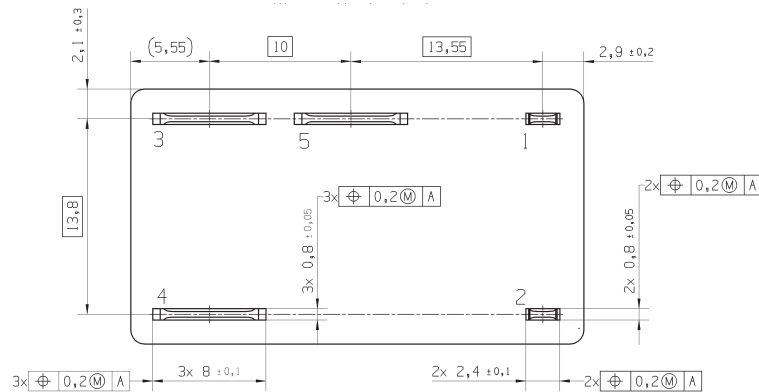

**Star Point Relay SPR** (Continued)

<b>Product code structure</b>		Typical product code	<b>V23135</b>	<b>-W</b>	<b>1</b>	<b>001</b>	<b>-A3</b>	<b>09</b>
<b>Type</b>	<b>V23135</b> Star Point Relay							
<b>Terminal and enclosure</b>	<b>W</b> Welding version, sealed							
<b>Design</b>	<b>1</b> Single relay							
<b>Coil version</b>	<b>001</b> Standard	<b>002</b> Sensitive						
<b>Contact type and material</b>	<b>A3</b> Standard, AgNi0.15							
<b>Contact arrangement</b>	<b>09</b> Standard (triple make)							

Product code	Terminal and enclosure	Design	Coil	Contact	Arrangement	Part number
V23135-W1001-A309	Welding version, sealed	Single relay	12VDC	Standard, AgNi0.15	1 form 3, 3 NO	1-1414704-0
V23135-W1002-A309			10VDC			1-1414705-0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)