

# High voltage fast-switching NPN power transistor

#### **Features**

- High voltage capability
- Low spread of dynamic parameters
- Very high switching speed

### **Application**

■ Compact fluorescent lamps (CFLs)

#### **Description**

The device is manufactured using high voltage multi epitaxial planar technology for high switching speeds and high voltage capability. It uses a cellular emitter structure with planar edge termination to enhance switching speeds while maintaining the wide RBSOA.




Figure 1. Internal schematic diagram




Table 1. Device summary

Order code	Marking	Package	Packaging
ST13003N	13003N	SOT-32	BAG

Electrical ratings ST13003N

# 1 Electrical ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit	
V <sub>CES</sub>	Collector-emitter voltage (V <sub>BE</sub> = 0)	700	V	
V <sub>CEO</sub>	Collector-emitter voltage (I <sub>B</sub> = 0)	400	V	
V <sub>EBO</sub>	Collector-base voltage (I <sub>C</sub> = 0)	9	V	
Ic	Collector current	1	Α	
I <sub>CM</sub>	Collector peak current (t <sub>P</sub> < 5 ms)	2	Α	
I <sub>B</sub>	Base current	0.5	Α	
I <sub>BM</sub>	Base peak current (t <sub>P</sub> < 5 ms)	1	Α	
P <sub>TOT</sub>	Total dissipation at T <sub>c</sub> = 25 °C	20	W	
T <sub>STG</sub>	Storage temperature	-55 to 150	°C	
TJ	Max. operating junction temperature	150	<u> </u>	

Table 3. Thermal data

Symbol	Parameter	Value	Unit
R <sub>thJC</sub>	Thermal resistance junction-case	6.25	°C/W

# 2 Electrical characteristics

 $T_{case} = 25$  °C; unless otherwise specified.

Table 4. Electrical characteristics

Symbol	Parameter	Test cor	nditions	Min.	Тур.	Max.	Unit
I <sub>CES</sub>	Collector cut-off current (V <sub>BE</sub> = 0)	V <sub>CE</sub> = 700 V V <sub>CE</sub> = 700 V	T <sub>C</sub> = 125 °C			1 5	mA mA
I <sub>EBO</sub>	Emitter cut-off current (I <sub>C</sub> = 0)	V <sub>EB</sub> = 9 V				1	mA
V <sub>CEO(sus)</sub>	Collector-emitter sustaining voltage (I <sub>B</sub> = 0)	I <sub>C</sub> = 10 mA		400			V
V <sub>CE(sat)</sub> (1)	Collector-emitter saturation voltage	I <sub>C</sub> = 0.5 A I <sub>C</sub> = 1 A	$I_B = 125 \text{ mA}$ $I_B = 330 \text{ mA}$			0.7 1.2	< <
V <sub>BE(sat)</sub> (1)	Base-emitter saturation voltage	I <sub>C</sub> = 0.5 A I <sub>C</sub> = 1 A	$I_B = 125 \text{ mA}$ $I_B = 330 \text{ mA}$			1.2 1.3	V V
h <sub>FE</sub>	DC current gain	I <sub>C</sub> = 0.5 A, I <sub>C</sub> = 1 A	-	6 5		18 15	
t <sub>s</sub>	Inductive Load Storage time Fall time	$\begin{split} I_C &= 0.4 \text{ A}  V_{cli} \\ I_{B(on)} &= -I_{B(off)} = \\ V_{BB(off)} &= -5 \text{ V} \end{split}$	80 mA		2.5 180		μs ns

<sup>1.</sup> Pulse test: pulse duration  $\leq 300~\mu s,$  duty cycle  $\leq 2~\%$ 

# 2.1 Electrical characteristics (curves)

Figure 2. Derating curve





Figure 3. DC current gain  $(V_{CE} = 3 V)$ 



**Electrical characteristics** ST13003N

DC current gain  $(V_{CE} = 5 V)$ Figure 4. Figure 5. **Collector-emitter saturation** voltage


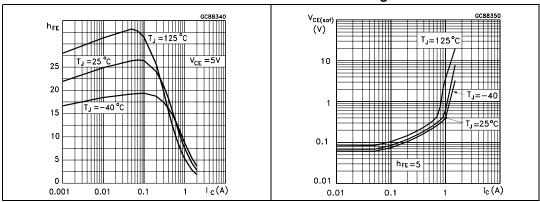


Figure 6. **Base-emitter saturation** voltage


Figure 7. Switching time inductive load

I<sub>C</sub>(A)

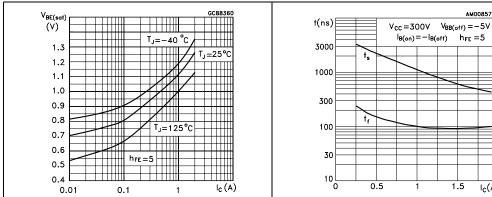

## 2.2 Test circuit

Figure 8. Inductive load switching test circuit

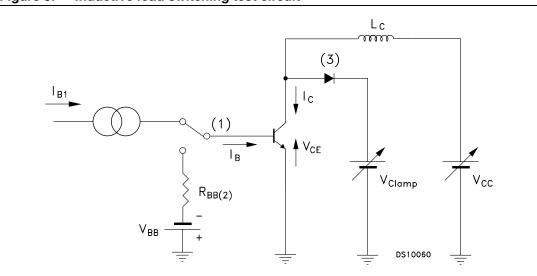


- 1. Fast electronic switch
- 2. Non-inductive resistor
- 3. Fast recovery rectifier

# 3 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: <a href="https://www.st.com">www.st.com</a>. ECOPACK<sup>®</sup> is an ST trademark.

DIM.	mm.			
	MIN.	TYP	MAX.	
А	2.4		2.9	
В	0.64		0.88	
B1	0.39		0.63	
D	10.5		11.05	
E	7.4		7.8	
е	2.04	2.29	2.54	
e1	4.07	4.58	5.08	
L	15.3		16	
Р	2.9		3.2	
Q		3.8		
Q1	1		1.52	
H2		2.15		
ı		1.27		

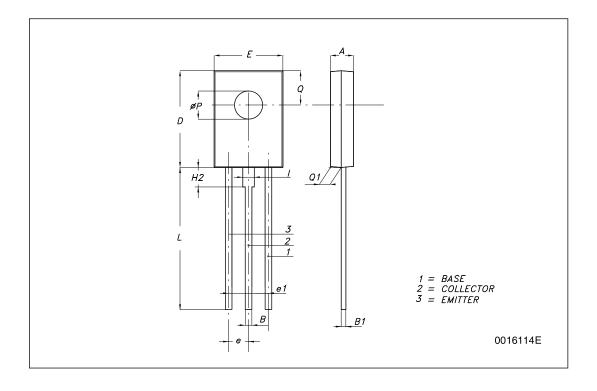

Revision history ST13003N

# 4 Revision history

Table 5. Document revision history

Date	Revision	Changes
26-May-2009	1	First release.
25-Feb-2010	2	Updated Figure 1 on page 1.

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - Pre-Biased category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below:

MMUN2217LT1G FP101-TL-E RN1607(TE85L,F) DRC9A14E0L DTA124GKAT146 DTA144WETL DTA144WKAT146

DTC113EET1G DTC115TETL DTC115TKAT146 DTC124TETL DTC144ECA-TP DTC144VUAT106 MUN5241T1G

BCR158WH6327XTSA1 NSBA114TDP6T5G NSBA143TF3T5G NSBA143ZF3T5G NSBC114EF3T5G NSBC114YF3T5G

NSBC123TF3T5G NSBC143TF3T5G NSVMUN2212T1G NSVMUN5111DW1T3G NSVMUN5314DW1T3G NSVUMC2NT1G

SMMUN2134LT1G SMUN2212T1G SMUN5235T1G SMUN5330DW1T1G SSVMUN5312DW1T2G 2SC3650-TD-E RN1303(TE85L,F)

RN4605(TE85L,F) BCR135SH6327XT TTEPROTOTYPE79 UMC3NTR DTA113EET1G EMA2T2R EMH15T2R SDTA114YET1G

SMMUN2111LT3G SMMUN2113LT1G SMMUN2114LT1G SMMUN2211LT3G SMUN2214T3G SMUN5113DW1T1G

SMUN5335DW1T1G NSBA114YF3T5G NSBC114TF3T5G