

TOSHIBA PHOTOCOUPLER GaAs IRED & PHOTO-TRANSISTOR

# CNY17-2, CNY17-3, CNY17-4

AC LINE /DIGITAL LOGIC ISOLATOR

DIGITAL LOGIC /DIGITAL LOGIC ISOLATOR

TELEPHONE LINE RECEIVER

TWISTED PAIR LINE RECEIVER


HIGH FREQUENCY POWER SUPPLY FEEDBACK CONTROL

RELAY CONTACT MONITOR

The TOSHIBA Corporation CNY17 consist of a gallium arsenide infrared emitting diode coupled with a silicon photo transistor in a dual in-line package.


- Small Package Size and Low Cost
- Fast Switching Speeds :  $5\mu s$  (TYP.)
- High DC Current Transfer Ratio : CTR ( $I_F=10mA, V_{CE}=5V$ )  
 CNY17-2 : 63~125%  
 CNY17-3 : 100~200%  
 CNY17-4 : 160~320%
- High Isolation Resistance :  $10^{11}\Omega$  (TYP.)
- High Isolation Voltage : 4400V (MIN.)

Unit in mm

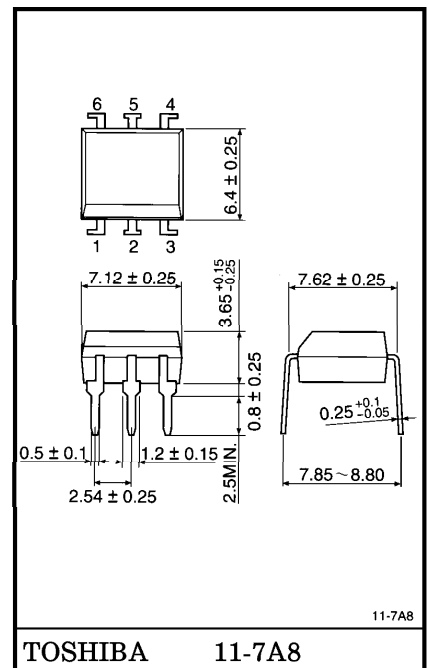

Weight : 0.4g

**PIN CONFIGURATION**



- 1 : ANODE
- 2 : CATHODE
- 3 : N.C.
- 4 : EMITTER
- 5 : COLLECTOR
- 6 : BASE

MAXIMUM RATINGS (Ta = 25°C)







CHARACTERISTIC		SYMBOL	RATING	UNIT
LED	Forward Current	$I_F$	60	mA
	Forward Current Derating	$\Delta I_F / ^\circ\text{C}$	0.8*	mA / °C
	Peak Forward Current (Note)	$I_{PF}$	3	A
	Power Dissipation	$P_D$	100	mW
	Power Dissipation Derating	$\Delta P_D / ^\circ\text{C}$	1.33*	mW / °C
	Reverse Voltage	$V_R$	6	V
PHOTO-TRANSISTOR	Collector-Emitter Voltage	$BV_{CEO}$	70	V
	Collector-Base Voltage	$BV_{CBO}$	70	V
	Emitter-Collector Voltage	$BV_{ECO}$	7	V
	Collector Current	$I_C$	100	mA
	Power Dissipation	$P_C$	150	mW
	Power Dissipation Derating	$\Delta P_C / ^\circ\text{C}$	2.0*	mW / °C
COUPLED	Storage Temperature	$T_{stg}$	-55~150	°C
	Operating Temperature	$T_{opr}$	-55~100	°C
	Lead Soldering Temperature (10s)	$T_{sol}$	260	°C
	Total Package Dissipation	$P_T$	200	mW
	Total Package Power Dissipation Derating	$\Delta P_T / ^\circ\text{C}$	2.6*	mW / °C






(Note) Pulse Width 1 $\mu$ s, 300pps.





\* Above 25°C ambient.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	$V_F$	$I_F = 60\text{mA}$	—	1.35	1.65	V
	Reverse Current	$I_R$	$V_R = 3\text{V}$	—	—	10	$\mu\text{A}$
	Capacitance	$C_D$	$V = 0, f = 1\text{MHz}$	—	30	—	pF
PHOTO-TRANSISTOR	DC Forward Current Gain	$h_{FE}$	$V_{CE} = 5, I_C = 500\mu\text{A}$	100	200	—	
	Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}, I_F = 0$	70	—	—	V
	Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}, I_F = 0$	70	—	—	V
	Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	$I_E = 100\mu\text{A}, I_F = 0$	7	—	—	V
	Collector Dark Current	$I_{CEO}$	$V_{CE} = 10\text{V}, I_F = 0$	—	1	50	nA
	Collector Dark Current	$I_{CBO}$	$V_{CB} = 10\text{V}, I_F = 0$	—	0.1	20	nA
	Collector-Emitter Capacitance	$C_{CE}$	$V = 0, f = 1\text{MHz}$	—	10	—	pF
COUPLED	Current Transfer Ratio	CNY17-2	$I_F = 10\text{mA}, V_{CE} = 5\text{V}$	63	—	125	%
		CNY17-3		100	—	200	
		CNY17-4		160	—	320	
	Saturation Voltage	$V_{CE(sat)}$	$I_F = 10\text{mA}, I_C = 2.5\text{mA}$	—	—	0.4	V
	Capacitance Input to Output	$C_S$	$V = 0, f = 1\text{MHz}$	—	0.8	—	pF
	Isolation Resistance	$R_S$	$V = 500\text{V}$	—	$10^{11}$	—	$\Omega$
	DC Isolation Voltage	$BV_S$	DC 1 minute	4400	—	—	V
	Rise / Fall Time Diode	$t_r / t_f$	$V_{CE} = 10\text{V}, I_C = 2\text{mA}$ $R_L = 100\Omega$	—	5	10	$\mu\text{s}$
Rise / Fall Time Photo	$t_r / t_f$	$V_{CB} = 10\text{V}, I_{CB} = 50\mu\text{A}$ $R_L = 100\Omega$	—	200	—	ns	

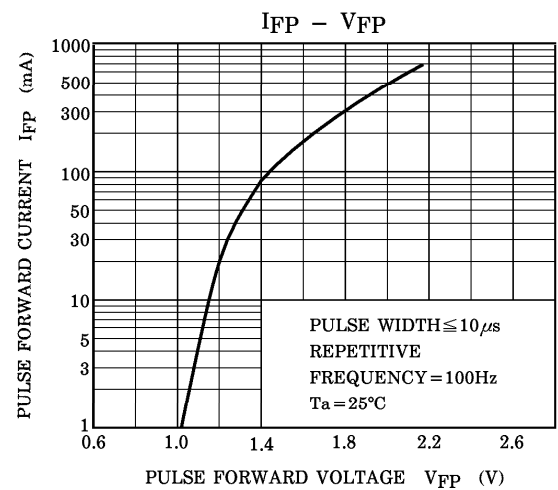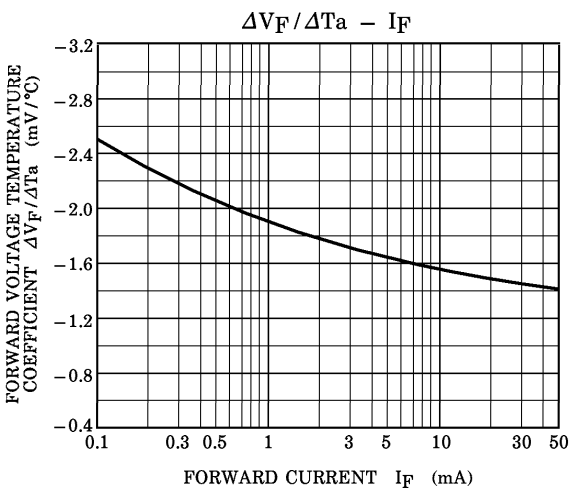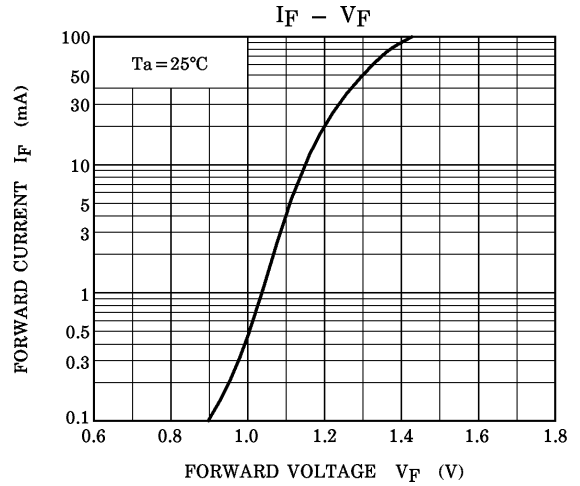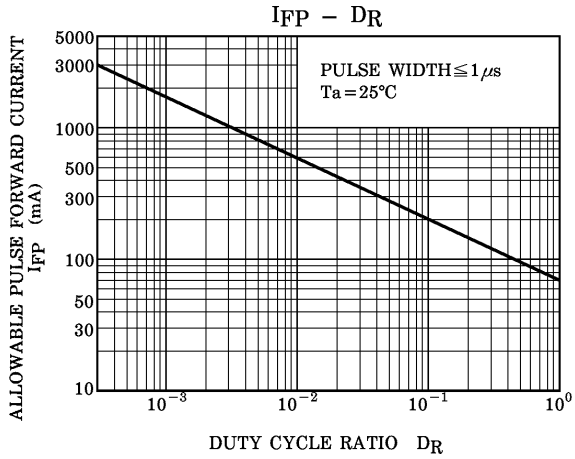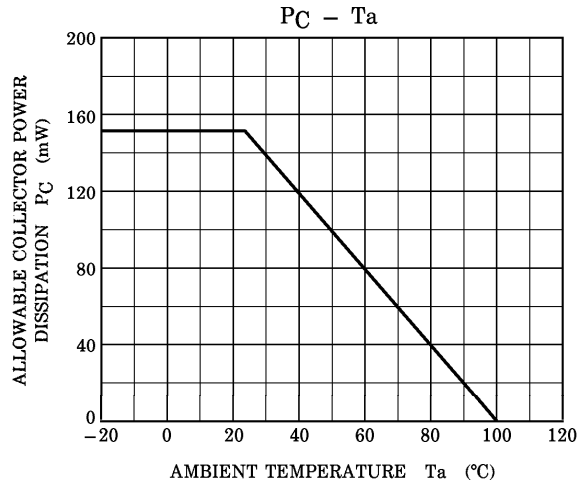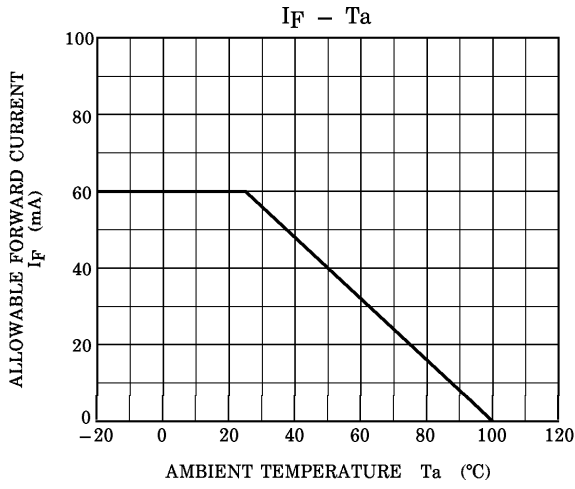

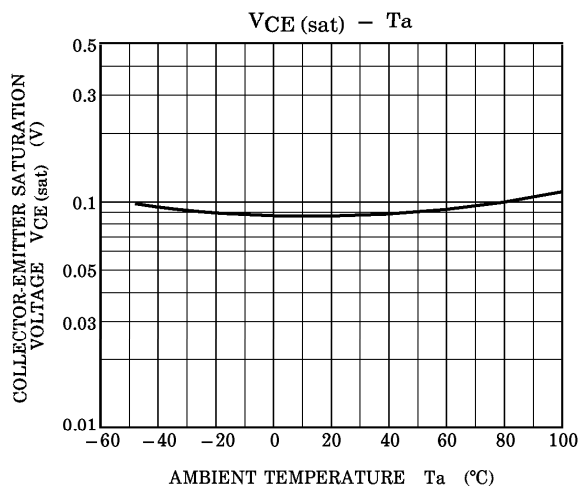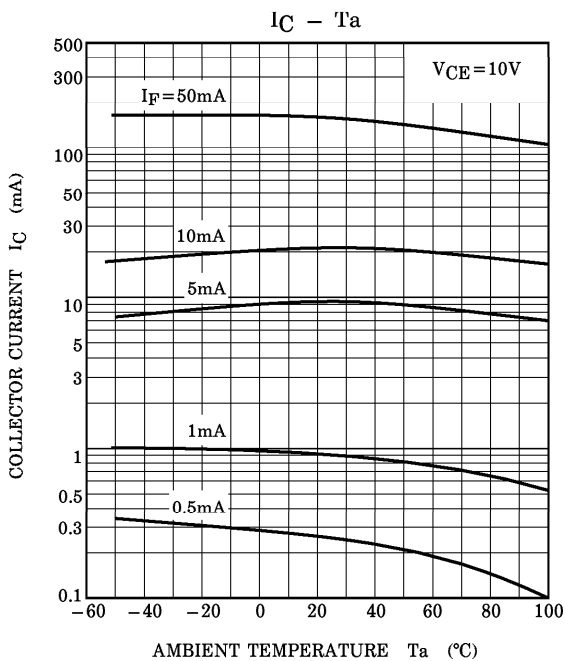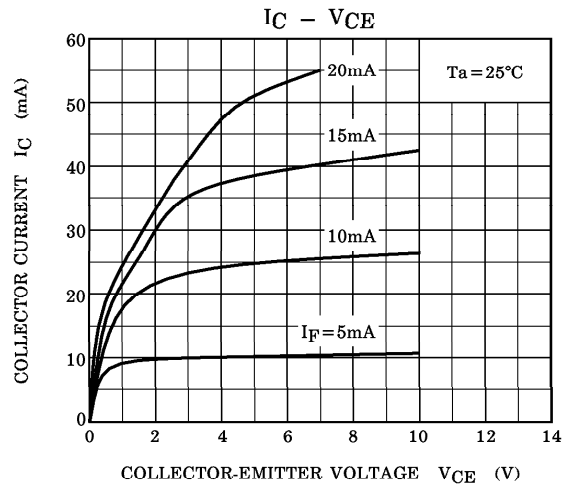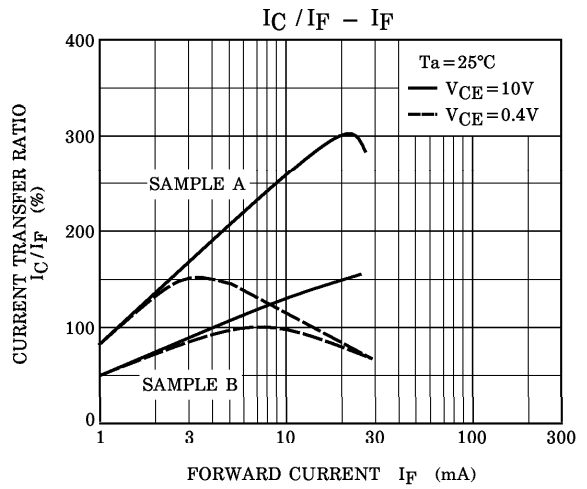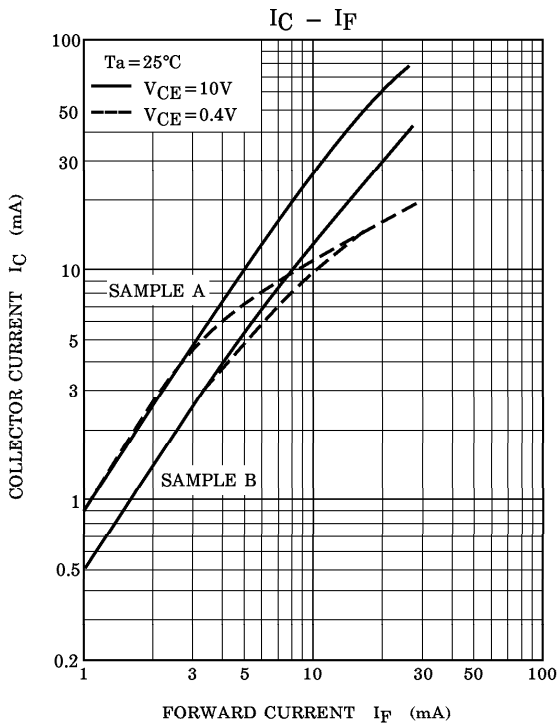

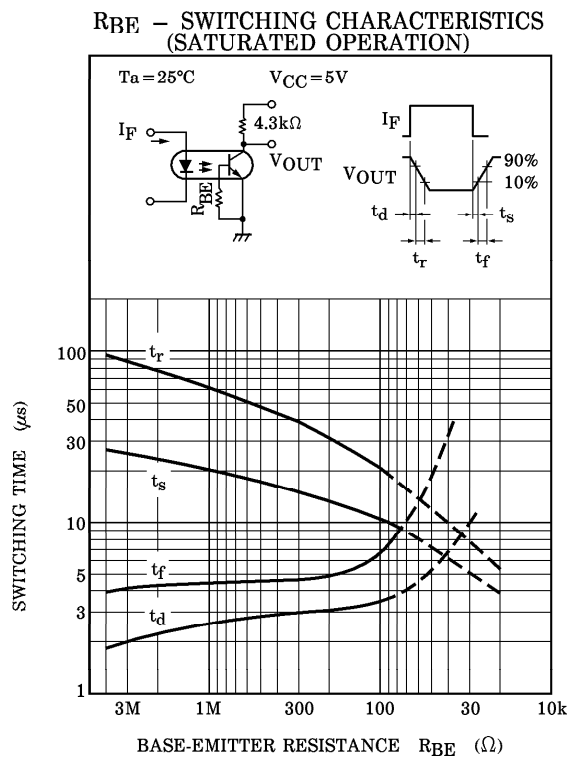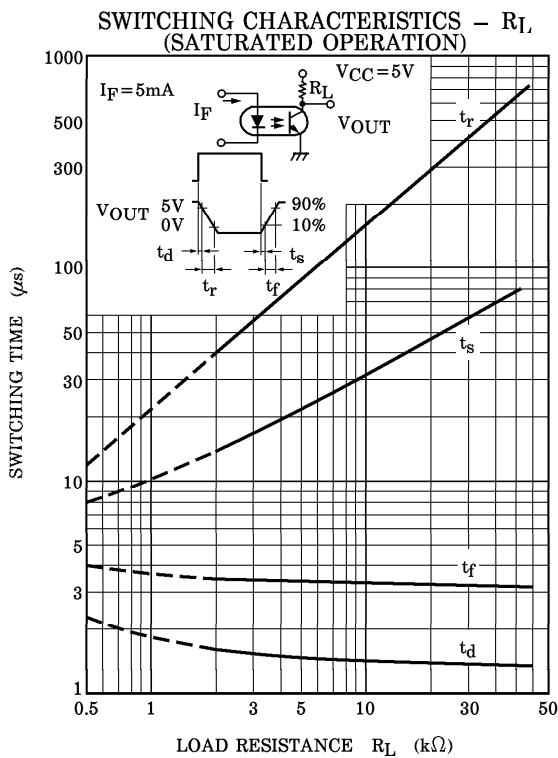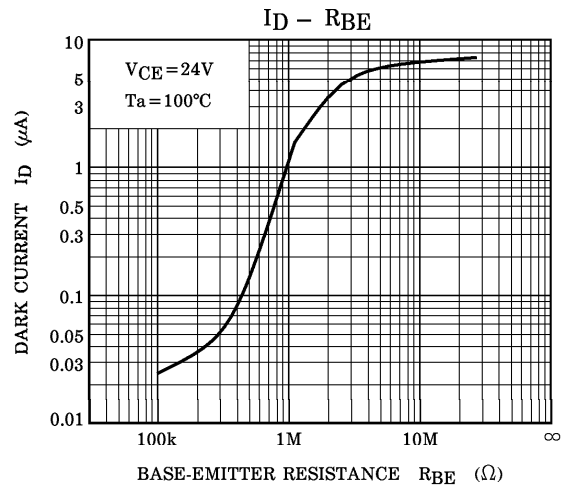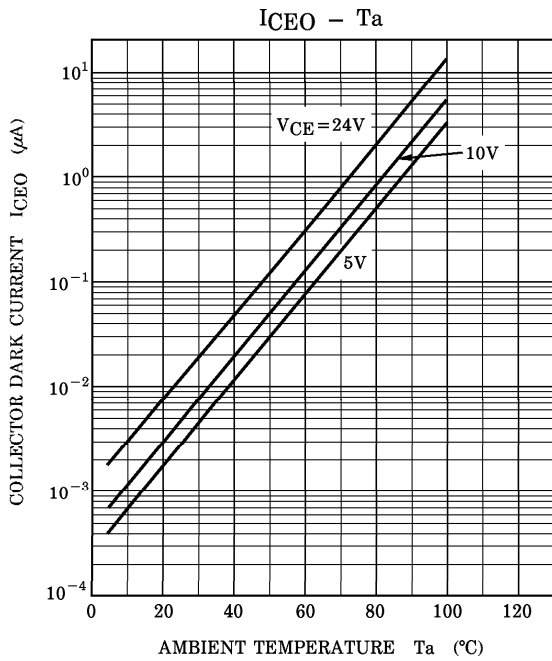

**RESTRICTIONS ON PRODUCT USE**

000707EBC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [toshiba](#) manufacturer:*

Other Similar products are found below :

[TLP250\(F\)](#) [TC7W125FU\(TE12L,F\)](#) [TC7SBL384CFU,LF](#) [TK20V60W,LVQ](#) [TLP183\(GB,E](#) [431392HB](#) [EMPP008Z](#) [TC58DVM92A5TA00](#)  
[TK35N65W5,S1F](#) [TLP291\(TP,E\)](#) [TLP705A\(F\)](#) [TLP5214\(D4-TP,E](#) [TLP591B\(C,F\)](#) [2SA1943N\(S1,E,S\)](#) [TLP5754\(D4-TP,E](#) [TLP352\(LF1,F\)](#)  
[TLP2409\(F\)](#) [TLP109\(TPR,E\)](#) [TC4013BP\(N,F](#) [TCK112G,LF](#) [TLP184\(GB-TPL,E\(O](#) [TLP185\(GR-TPL,E\(O](#) [TLP108](#) [VFNC3S-2015PL](#)  
[VFS15-4007PL-W](#) [TLP7820\(D4-A,E](#) [TPH4R10ANL,L1Q](#) [TLP7920\(D4-A,F](#) [SSM3J35AMFV,L3F](#) [THRIVECOVER](#) [1SS392\(TE85L,F\)](#)  
[TCK22971G,LF](#) [TK28A65W,S5X](#) [TK6A80E,S4X](#) [058399HB](#) [TORX177F,T](#) [TK31A60W,S4VX](#) [TLP190B\(U,C,F\)](#) [VFS15S-2015PL-W](#)  
[TK39N60W5,S1VF](#) [TLP2362\(E\)](#) [74VHC125FT](#) [TLP759\(LF1,J,F\)](#) [TLP5754\(D4,E](#) [TLP4026G\(F\)](#) [TLP360J](#) [TK8A65W,S5X](#)  
[TC7W14FUTE12LF](#) [TB6568KQ\(O,8\)](#) [TLP2662\(F\)](#)