


BZV79C2V4 - BZV79C75

500mW Surface Mount Zener Voltage Regulator



RoHS COMPLIANCE

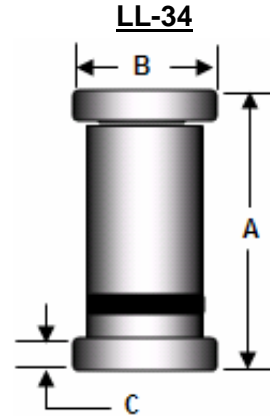

Features

- ✧ Zener Voltage Range 2.0 to 75Volts.
- ✧ LL-34 (Mini-MELF) Package
- ✧ Surface Device Type Mounting
- ✧ Hermetically Sealed Glass
- ✧ Compression Bonded Construction.
- ✧ All External Surface Are Corrosion Resistant And Terminals Are Readily Solderable.
- ✧ Matte Tin (Sn) Lead Finish
- ✧ RoHS Compliant

Dimension	Millimeters		Inches	
	Min	Max	Min	Max
A	3.302	3.505	0.13	0.138
B	1.397	1.499	0.055	0.059
C	0.35	0.5	0.014	0.02

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-O rate flame retardant
- ✧ Lead: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode.
- ✧ High temperature soldering guaranteed: 260°C/10 seconds
- ✧ Weight: 0.012 gram



ELECTRICAL SYMBOL

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	Value	Units
Power Dissipation	P_D	500	mW
Operating Temperature Range	T_{OPR}	-65 to +200	°C
Storage Temperature Range	T_{STG}	-65 to +200	°C

Notes: These ratings are limiting values above which the serviceability of the diode may be impaired

Electrical characteristics (TA=25°C unless otherwise note)

Device Type	V _Z @ I _{ZT} (Volts)		I _{ZT} (mA)	Z _{ZT} @ I _{ZT}	I _{ZK} (mA)	Z _{ZK} @ I _{ZK}	I _R @ V _R	V _R
	Min	Max		(Ω)		(Ω)	(μA)	(Volts)
				Max		Max	Max	Max
BZV79C 2V4	2.28	2.56	5	100	1	600	100	1
BZV79C 2V7	2.51	2.89	5	100	1	600	75	1
BZV79C 3V0	2.8	3.2	5	95	1	600	50	1
BZV79C 3V3	3.1	3.5	5	95	1	600	25	1
BZV79C 3V6	3.4	3.8	5	90	1	600	15	1
BZV79C 3V9	3.7	4.1	5	90	1	600	10	1
BZV79C 4V3	4	4.6	5	90	1	600	5	1
BZV79C 4V7	4.4	5	5	80	1	500	3	2
BZV79C 5V1	4.8	5.4	5	60	1	480	2	2
BZV79C 5V6	5.2	6	5	40	1	400	1	2
BZV79C 6V2	5.8	6.6	5	10	1	150	3	4
BZV79C 6V8	6.4	7.2	5	15	1	80	2	4
BZV79C 7V5	7	7.9	5	15	1	80	1	5
BZV79C 8V2	7.7	8.7	5	15	1	80	0.7	5
BZV79C 9V1	8.5	9.6	5	15	1	100	0.5	6
BZV79C 10	9.4	10.6	5	20	1	150	0.2	7
BZV79C 11	10.4	11.6	5	20	1	150	0.1	8
BZV79C 12	11.4	12.7	5	25	1	150	0.1	8
BZV79C 13	12.4	14.1	5	30	1	170	0.1	8
BZV79C 15	13.8	15.6	5	30	1	200	0.05	10.5
BZV79C 16	15.3	17.1	5	40	1	200	0.05	11.2
BZV79C 18	16.8	19.1	5	45	1	225	0.05	12.6
BZV79C 20	18.8	21.2	5	55	1	225	0.05	14
BZV79C 22	20.8	23.3	5	55	1	250	0.05	15.4
BZV79C 24	22.8	25.6	5	70	1	250	0.05	16.8
BZV79C 27	25.1	28.9	2	80	0.5	300	0.05	18.9
BZV79C 30	28	32	2	80	0.5	300	0.05	21
BZV79C 33	31	35	2	80	0.5	325	0.05	23.1
BZV79C 36	34	38	2	90	0.5	350	0.05	25.2
BZV79C 39	37	41	2	130	0.5	350	0.05	27.3
BZV79C 43	40	46	2	150	0.5	375	0.05	30.1
BZV79C 47	44	50	2	170	0.5	375	0.05	32.9
BZV79C 51	48	54	2	180	0.5	400	0.05	35.7
BZV79C 56	52	60	2	200	0.5	425	0.05	39.2
BZV79C 62	58	66	2.5	215	0.5	1000	0.05	43.4
BZV79C 68	64	72	2.5	240	0.5	1000	0.05	47.6
BZV79C 75	70	80	2.5	255	0.5	1000	0.05	52.5

V_F Forward Voltage = 1.5 V Maximum @ I_F = 100 mA for all types

Notes :

1. The type numbers listed have zener voltage min/max limits as shown.
2. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest Tak Cheong Electronics representative.
3. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK}.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [Taiwan Semiconductor](#) manufacturer:

Other Similar products are found below :

[MMSZ5245BS-7-F](#) [RKZ13B2KG#P1](#) [RKZ5.6B2KJ#R1](#) [EDZTE6113B](#) [EDZTE6116B](#) [EDZTE616.8B](#) [1N747A](#) [1N966B](#) [NTE5116A](#)
[NTE5121A](#) [NTE5139A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5156A](#) [NTE5164A](#) [JANS1N4974US](#) [SMAJ4764A-TP](#) [RKZ5.1BKU#P6](#)
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5920B-TP](#) [3SMBJ5925B-TP](#) [TDZTR24](#) [441774C](#) [MMSZ4678-TP](#) [MMSZ5232BQ-13-F](#)
[BZG04-36](#) [BZG05C9V1-HE3-TR](#) [HZM30NBTR-E](#) [UDZTE-175.1B](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4746A-TP](#)
[RKZ18B2KK#R1](#) [RKZ10B2KL#R1](#) [RKZ6.8B2KL#R1](#) [RKZ8.2B2KL#R1](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [SMBZ5920B-E3/52](#) [ZMM3.0](#)
[RD16UM-T1-A](#) [RD39S-T1-A](#) [RD9.1S-T1-A](#) [RD10S-T1-A](#) [RD20S-T1-A](#) [RD2.2S-T1-A](#) [RD2.7UM-T1-A](#)