








Part Number: MS-130026-2
Revision 20140225 - Generated 12-Mar-2014

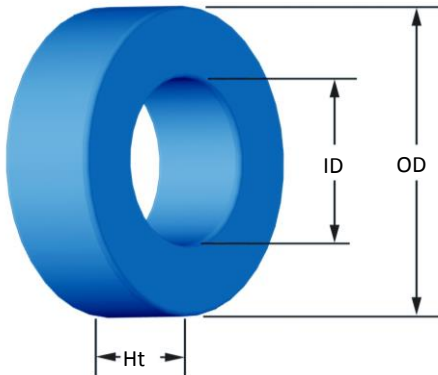

OD	(nom. - bare core)	33.02 mm	1.300 in
	(max. - after coating)	33.83 mm	1.332 in
ID	(nom. - bare core)	19.94 mm	0.785 in
	(min. - after coating)	19.30 mm	0.760 in
Ht	(nom. - bare core)	10.67 mm	0.420 in
	(max. - after coating)	11.61 mm	0.457 in
Mass	(approximate)	28 grams	
Magnetic Dimensions	A_e - Eff. Mag. Cross Section	0.672 cm ²	
	L_e - Eff. Mag. Path Length	8.15 cm	
	V_e - Eff. Core Volume	5.48 cm ³	
	WA - Min. Eff. Window Area	2.93 cm ²	
	sa - Surface Area	40.1 cm ²	
	mlt - mean length per turn	4.74 cm	
Inductance	μ_i (reference)	26	
	A_L value (nominal)	28 nH/N ²	
	Test Winding	N=70, #22 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.21 V	
	AL tolerance	±8%	
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=1.000E+09$, $b=4.213E+08$, $c=1.032E+07$, $d=2.297E-14$		
	B_{pk}	500 G	
	frequency	100 kHz	
	Core Loss (nominal)	216 mW/cm ³	
Core Loss (maximum)	248 mW/cm ³		
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: $a=1.000E-02$, $b=2.061E-07$, $c=1.995$, $d=0.000$		
	H_{DC}	200 Oe	
	Percent Initial Perm.(nom.)	55.4%	
Percent Initial Perm.(min.)	46.3%		
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	512 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	14	18	22	29	36	46	58	73	91	114	142
		Rdc(Ω)	1.4 m	2.8 m	5.4 m	11.4 m	22.4 m	45.6 m	91.5 m	183.1 m	363.0 m	723.2 m	1.4
Full Winding	Turns	15	24	37	57	88	136	211	326	504	780	1,208	
	Rdc(Ω)	1.5 m	3.7 m	9.1 m	22.3 m	54.9 m	134.9 m	332.8 m	817.6 m	2.0	4.9	12.2	

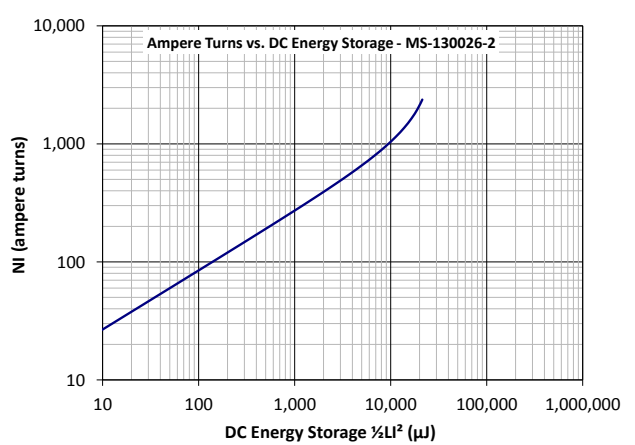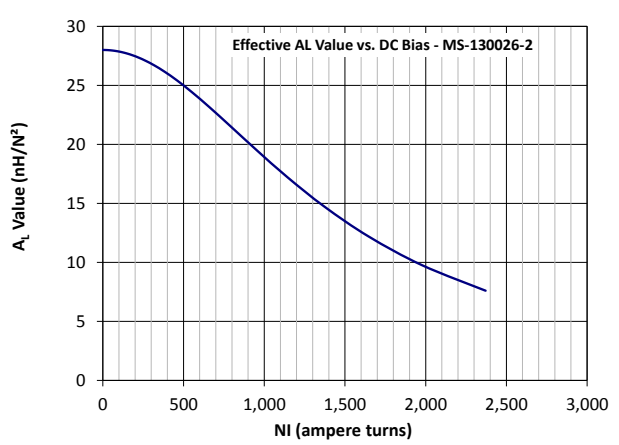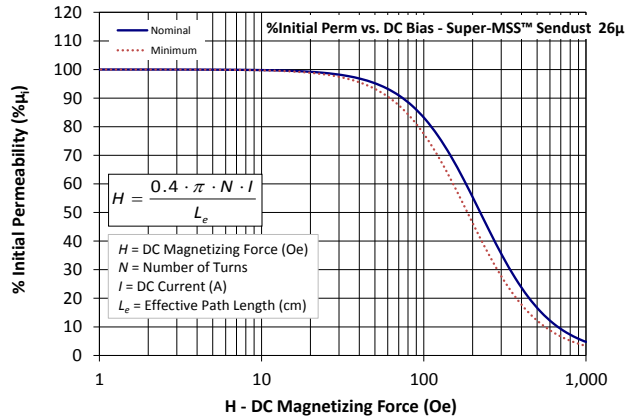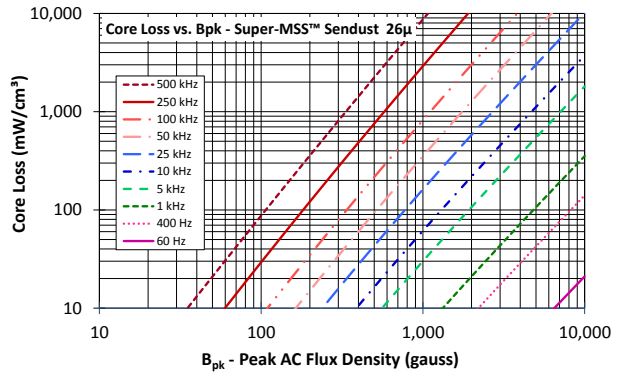

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Toroids / Ferrite Rings](#) category:

Click to view products by [Arnold](#) manufacturer:

Other Similar products are found below :

[5943001601](#) [28B0200-4](#) [28B0250-1](#) [29D3800-000](#) [28B0137-3](#) [4327 018 35221](#) [432703013571](#) [432703033201](#) [4327 030 37511](#) [4327 030 37911](#) [4327 030 57161](#) [432703057191](#) [B62152P0007X030](#) [432202090241](#) [432202101631](#) [432202133882](#) [432703012441](#) [4327 030 12521](#) [4327 030 57111](#) [5343232001](#) [5943000901](#) [432703034521](#) [5961004101](#) [5961000621](#) [4078034621](#) [4077378111](#) [28B1250-2](#) [28B2000-3](#) [28B1387-1](#) [B64291A1304X000](#) [28B2400-0](#) [B64290A0699X010](#) [5510-017](#) [5961000811](#) [CBCT-35-1](#) [CBCT-120-1](#) [CBCT-70-1](#) [5977004801](#) [5976000201](#) [5968003801](#) [5975011101](#) [5977000501](#) [5978008001](#) [28B0355-0](#) [7427018](#) [M-060](#) [CST29/19/7.5-4S2](#) [T9X8X5](#) [4077485111](#)
[TN10/6/4-3F3](#)