








Part Number: **MS-226014-2**
Revision 20140225 - Generated 12-Mar-2014

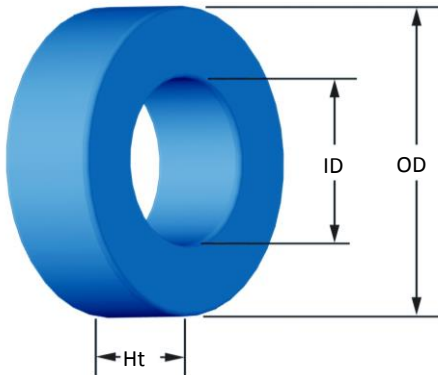

OD	(nom. - bare core) (max. - after coating)	57.15 mm 58.04 mm	2.250 in 2.285 in
ID	(nom. - bare core) (min. - after coating)	26.39 mm 25.58 mm	1.039 in 1.007 in
Ht	(nom. - bare core) (max. - after coating)	15.24 mm 16.13 mm	0.600 in 0.635 in
Mass	(approximate)	140 grams	
Magnetic Dimensions	A_e - Eff. Mag. Cross Section L_e - Eff. Mag. Path Length V_e - Eff. Core Volume WA - Min. Eff. Window Area sa - Surface Area mlt - mean length per turn	2.29 cm ² 12.506 cm 28.6 cm ³ 5.14 cm ² 105 cm ² 7.75 cm	
Inductance	μ_i (reference) A_L value (nominal) Test Winding Frequency Voltage on Agilent 4284A AL tolerance	14 32 nH/N ² N=60, #18 AWG 10 kHz 0.61 V ±8%	
Core Loss	Core Loss(mW/cm ³): $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$ where B_{pk} expressed in gauss, f expressed in hertz, and: $a=1.000E+09$, $b=4.213E+08$, $c=1.032E+07$, $d=2.297E-14$ B_{pk} frequency Core Loss (nominal) Core Loss (maximum)	300 G 100 kHz 79 mW/cm ³ 90 mW/cm ³	
DC Saturation	$\% \mu_i \frac{1}{a + b \cdot H^c} + d$ where H expressed in oersteds, and: $a=1.000E-02$, $b=5.722E-08$, $c=1.995$, $d=0.000$ H_{DC} Percent Initial Perm.(nom.) Percent Initial Perm.(min.)	200 Oe 81.7% 75.7%	
Coating/Pkg	Coating Type: Voltage Breakdown (min.) Limit Package Quantity	Blue Epoxy 1000 Vrms 0.1 mA, 5 s 80 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	19	24	31	39	49	62	78	97	122	152	190
		Rdc(Ω)	3.0 m	6.1 m	12.5 m	25.0 m	50.0 m	100.5 m	201.2 m	397.8 m	795.8 m	1.6	3.1
Full Winding	Turns	27	42	64	100	154	239	370	572	886	1,371	2,122	
	Rdc(Ω)	4.3 m	10.6 m	25.8 m	64.1 m	157.0 m	387.5 m	954.2 m	2.3	5.8	14.2	35.0	

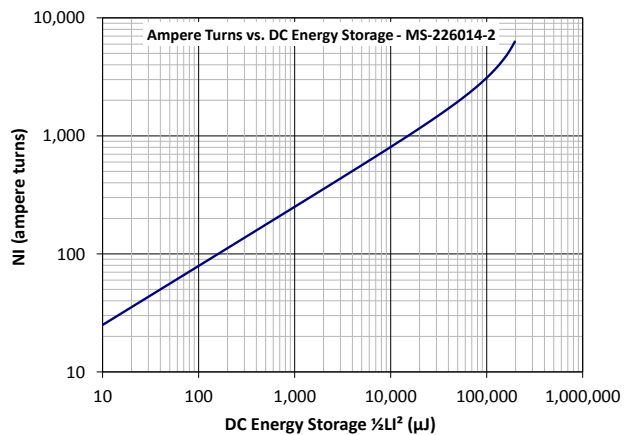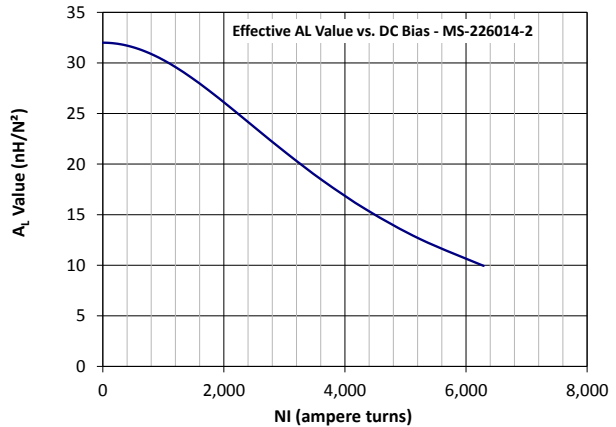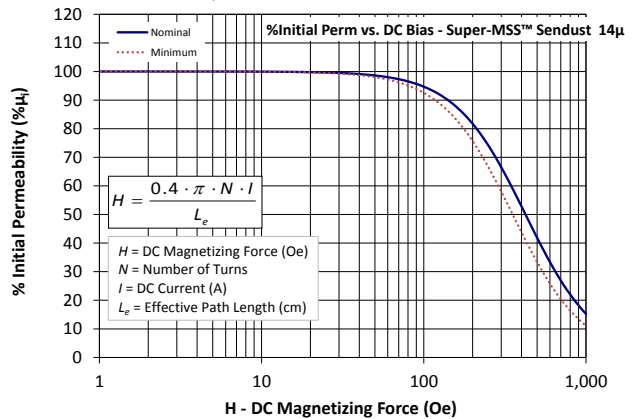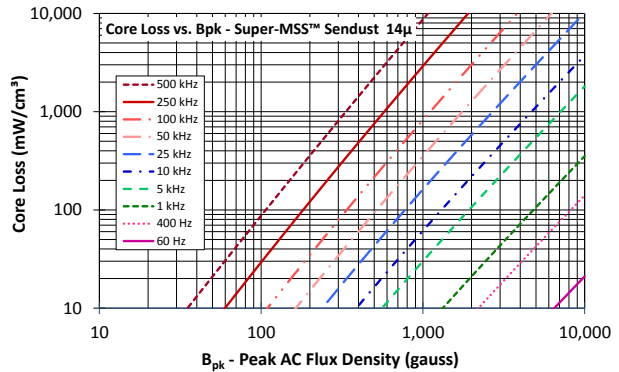

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Toroids / Ferrite Rings](#) category:

Click to view products by [Arnold](#) manufacturer:

Other Similar products are found below :

[5943001601](#) [28B0200-4](#) [28B0250-1](#) [29D3800-000](#) [28B0137-3](#) [4327 018 35221](#) [432703013571](#) [432703033201](#) [4327 030 37511](#) [4327 030 37911](#) [4327 030 57161](#) [432703057191](#) [B62152P0007X030](#) [432202090241](#) [432202101631](#) [432202133882](#) [432703012441](#) [4327 030 12521](#) [4327 030 57111](#) [5343232001](#) [5943000901](#) [432703034521](#) [5961004101](#) [5961000621](#) [4078034621](#) [4077378111](#) [28B1250-2](#) [28B2000-3](#) [28B1387-1](#) [B64291A1304X000](#) [28B2400-0](#) [B64290A0699X010](#) [5510-017](#) [5961000811](#) [CBCT-35-1](#) [CBCT-120-1](#) [CBCT-70-1](#) [5977004801](#) [5976000201](#) [5968003801](#) [5975011101](#) [5977000501](#) [5978008001](#) [28B0355-0](#) [7427018](#) [M-060](#) [CST29/19/7.5-4S2](#) [T9X8X5](#) [4077485111](#)
[TN10/6/4-3F3](#)