

- Features:
- Lower-cost alternative to carbon comps and wirewounds
 - Coating meets UL 94V-0
 - Meets solvent test of Mil Standard 202, Method 215
 - Cut and formed product is available on select sizes; contact factory for details
 - Higher or lower resistance values may be possible; contact factory
 - Flameproof
 - RoHS compliant / lead-free




Electrical Specifications								
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage (1)	Maximum Overload Voltage	Dielectric Withstanding Voltage	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance		
						1%	2%	5%
RSF12	0.5W	250V	400V	600V	±200 ppm/°C	0.1 - 150K	0.1 - 75K	0.1 - 1M
RSF1	1W	350V	600V	600V	±200 ppm/°C	0.1 - 100K	0.1 - 100K	0.1 - 1M
RSF2	2W	350V	600V	600V	±200 ppm/°C	0.1 - 120K	0.1 - 120K	0.1 - 1M
RSF3	3W	400V	700V	600V	±200 ppm/°C	0.1 - 470K	0.1 - 560K	0.1 - 1M
RSF5	5W	750V	1,000V	1,000V	±200 ppm/°C	0.1 - 470K	0.1 - 560K	0.1 - 1M
RSMF12	0.5W	250V	400V	350V	±200 ppm/°C	0.1 - 46.4K	0.1 - 47K	0.1 - 470K
RSMF1	1W	350V	600V	500V	±200 ppm/°C	0.1 - 75K	0.1 - 75K	0.1 - 470K
RSMF2	2W	350V	600V	500V	±200 ppm/°C	0.1 - 100K	0.1 - 100K	0.1 - 470K
RSMF3	3W	500V	800V	500V	±200 ppm/°C	0.1 - 118K	0.1 - 120K	0.1 - 470K
RSMF5	5W	750V	1,000V	750V	±200 ppm/°C	0.1 - 470K	0.1 - 560K	0.1 - 1M

(1) Lesser of \sqrt{PR} or maximum working voltage


Performance Characteristics			
Test	Standard / Method	Requirement	
		RSMF Series	RSF Series
Short Time Over Load	JISC 5202 5.5	±2%	±1%
Humidity	MIL-STD 202, Method 103	±1.5%	
Dielectric Withstanding Voltage	MIL-STD 202, Method 301	±0.5%	
Load Life	MIL-STD 202, Method 108	±2%	
Load Life in Humidity	JISC 5202 7.9	±2%	
Temperature Cycling	JESD22 Method JA-104	±1%	
Moisture Resistance	MIL-STD 202, Method 106	±0.5%	
Resistance to Solder Heat	MIL-STD 202, Method 210F	±1%	
Insulation Resistance	JIS C5201-1, IEC60115-1	≥ 1Gohm	
Terminal Strength	MIL-STD 202, Method 211	±0.2%	
Vibration	MIL-STD 202, Method 201	±0.5%	

Operating Temperature Range: -55°C to +200°C (RSF12, RSMF12, RSMF1)
-55°C to +235°C (All others)

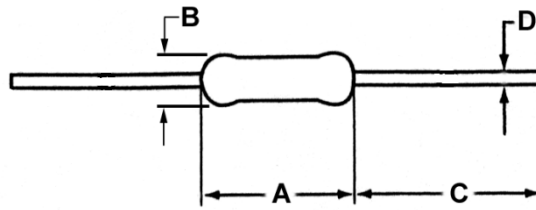


Mechanical Specifications					
Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Unit
RSF12	0.35 ± 0.04	0.14 ± 0.02	1.10 ± 0.12	0.02 ± 0.0004	inches
	9.00 ± 1.00	3.50 ± 0.50	28.00 ± 3.00	0.60 ± 0.01	mm
RSF1	0.43 ± 0.04	0.18 ± 0.02	1.10 ± 0.20	0.03 ± 0.004	inches
	11.00 ± 1.00	4.50 ± 0.50	28.00 ± 5.00	0.70 ± 0.10	mm
RSF2	0.59 ± 0.04	0.20 ± 0.04	1.34 ± 0.16	0.03 ± 0.004	inches
	15.00 ± 1.00	5.00 ± 1.00	34.00 ± 4.00	0.75 ± 0.10	mm
RSF3	0.69 ± 0.08	0.26 ± 0.02	1.38 ± 0.12	0.03 ± 0.002	inches
	17.50 ± 2.00	6.50 ± 0.50	35.00 ± 3.00	0.80 ± 0.05	mm
RSF5	0.96 ± 0.08	0.33 ± 0.02	1.38 ± 0.12	0.03 ± 0.002	inches
	24.50 ± 2.00	8.50 ± 0.50	35.00 ± 3.00	0.80 ± 0.05	mm
RSMF12	0.26 ± 0.02	0.09 ± 0.01	1.10 ± 0.12	0.02 ± 0.003	inches
	6.50 ± 0.50	2.30 ± 0.20	28.00 ± 3.00	0.55 ± 0.07	mm
RSMF1	0.35 ± 0.04	0.13 ± 0.02	1.10 ± 0.12	0.03 ± 0.0004	inches
	9.00 ± 1.00	3.20 ± 0.60	28.00 ± 3.00	0.65 ± 0.01	mm
RSMF2	0.43 ± 0.04	0.17 ± 0.03	1.18 ± 0.20	0.03 ± 0.004	inches
	11.00 ± 1.00	4.20 ± 0.80	30.00 ± 5.00	0.75 ± 0.10	mm
RSMF3	0.59 ± 0.04	0.20 ± 0.04	1.34 ± 0.16	0.03 ± 0.004	inches
	15.00 ± 1.00	5.00 ± 1.00	34.00 ± 4.00	0.75 ± 0.10	mm
RSMF5	0.69 ± 0.08	0.26 ± 0.02	1.38 ± 0.08	0.03 ± 0.002	inches
	17.50 ± 2.00	6.50 ± 0.50	35.00 ± 2.00	0.80 ± 0.05	mm

Power Derating Curve:

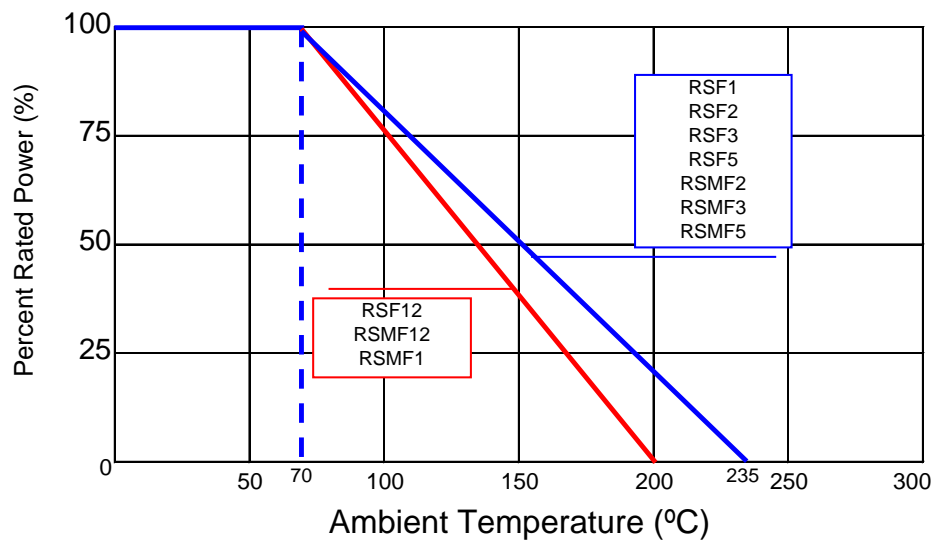

How to Order



Product Series		Size	Power	Tolerance			Packaging				Resistance Value
Code	Description			Code	Tol	Value	Code	Description	Size	Quantity	
RSF	Metal Oxide	12	0.5W	F	1%	E96	T	Tape and Reel	RSMF12	5,000	Four characters with the multiplier used as the decimal holder. 0.22 ohm = R220 33.2 ohm = 33R2 10.2 Kohm = 10K2 1 Mohm = 1M00
RSMF	Mini	1	1W	G	2%	E24			RSF12, RSF1 RSMF1, RSMF2	2,500	
PRSF(1)	Panasert	2	2W	J	5%					RSF2, RSMF3 RSF3, RSMF5	
		3	3W						RSF5	500	
		5	5W						RSMF12	5,000	
							A	Ammo	RSF12; RSMF1	2,000	
									RSF1, RSF2, RSMF2, RSMF3	1,000	
									RSF3, RSF5, RSMF5	500	
							B	Bulk	All Sizes	1,000	

(1) For packaging information see Radial Leaded Packaging Spec page

Legacy Part Number (before January 3, 2011):

SEI Type	Code	Nominal Resistance	Tolerance	Packaging
RS	1/2	0.47	5%	R

Type	Description	Code	Wattage	Tolerance	Values
RSF	Metal Oxide	1/2	0.5W	1%	E96
RSMF	Mini	1	1W	2%	E24
PRSF (1)	Panasert	2	2W	5%	E24
		3	3W		
		5	5W		

Types	Qty	Description	Code
RSMF12	5,000	Tape and Reel	R
RSF12, RSMF1, RSF1, RSMF2	2,500		
RSF2, RSMF3 RSF3, RSMF5	1,000		
RSF5	500		
RSMF12	5,000		
RSF12, RSMF1	2,000	Ammo	T
RSF1, RSF2, RSMF2, RSMF3	1,000		
RSF3, RSF5, RSMF5	500		
All	1,000	Bulk	A

(1) For packaging information see Radial Leaded Packaging Spec page

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - Leaded](#) category:

Click to view products by [Stackpole](#) manufacturer:

Other Similar products are found below :

[010-007220-002REV A](#) [M39014/01-1210V](#) [M39014/01-1281V](#) [M39014/01-1335V](#) [M39014/01-1571V](#) [M39014/01-1578V](#) [M39014/01-1593](#)
[M39014/02-1265V](#) [M39014/02-1347](#) [M39014/02-1350](#) [M39014/02-1356VTR1](#) [M39014/22-0167](#) [M39014/22-0734](#) [87043-49](#) [Q52-DK](#)
[AR215F103K4RTR2-3323](#) [C0603C309C5GACTU-CUT-TAPE](#) [C410C221K1G5TATR](#) [C420C102J1G5TATR](#) [C430C104M1U5TATR](#)
[SL155C222MAB](#) [FK26X7R2E104KN006](#) [CCR06CG183GRV](#) [CFB1/2C101J](#) [CFB1/2C102J](#) [CN20C102K](#) [M39014/01-1317](#) [M39014/01-](#)
[1572V](#) [M39014/01-1594V](#) [M39014/02-1236](#) [M39014/02-1321V](#) [M39014/02-1345V](#) [M39014/22-0351](#) [M39014/22-0695](#) [M39014/220767](#)
[M39014/220788](#) [M39014/22-1005](#) [MA405E334MAA](#) [MD015A103KAB](#) [SL301E105MAB](#) [CCR05CG242FRV](#) [KTD101B684M32A0B00](#)
[CCR07CG473KR](#) [CCR05CG820JP](#) [TKC-TMC1206-05-1501-J??](#) [TKC-TMC1206-05-1801-J](#) [TKC-TMC1206-05-20R0-F](#) [TKC-](#)
[TMC1206-05-3901-J](#) [TKC-TMC1206-05-44R2-F](#) [TKC-TMC1206-05-4703-J??](#)